

# **DRAINAGE REPORT**


## **Splash Carwash**

***Date: 05-11-2022***

***Located in: Bryant, Arkansas***

***Prepared for:***  
**City of Bryant, Arkansas**

***Prepared by:***



**PHILLIP LEWIS ENGINEERING**

---

Structural + Civil Consultants

23620 Interstate 30 | Bryant, AR  
PH: 501-350-9840


PHILLIP LEWIS ENGINEERING, INC.  
Structural/Civil Design  
23620 Interstate 30 N  
Bryant, Arkansas 72022

## **Description of Project**


The proposed project is for development of Splash Carwash facility located at 2116 Reynolds Road in Bryant, Arkansas. The 1.09 acres is located at the intersection of Reynolds Road and Evans loop (old filling station site).

The scope of the project includes the construction of a drive thru tunnel carwash with self service vacuum bays and a covered pay kiosk. In addition to the vacuum bays, new interior landscape islands will be added around the vacuum bays as well as new landscape areas at the South and West side of the property.


Post-development runoff conditions will be reduced from Pre-development runoff conditions after completion of the development with a detention pond constructed in the North East Corner of the property. Post-development site conditions will have an increase in pervious areas. Detention is calculated and sized for the 100 year storm.





PRE-DEVELOPMENT





POST-DEVELOPMENT



CURB CUT WIER



DETENTION POND



**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

Printed 5/11/2022

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Page 2

**Area Listing (all nodes)**

Area (acres)	C	Description (subcatchment-numbers)
0.516	0.95	ASPHALT SURFACE (2S)
0.390	0.46	GRASS LANDSCAPING (2S)
0.712	0.65	GRAVEL PARKING (1S)
0.152	0.97	ROOF TOP (2S)
0.345	0.77	SHRUB POOR CONDITION BRUSH (1S)
<b>2.115</b>	<b>0.73</b>	<b>TOTAL AREA</b>

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

Printed 5/11/2022

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Page 3

**Pipe Listing (all nodes)**

Line#	Node Number	In-Invert (feet)	Out-Invert (feet)	Length (feet)	Slope (ft/ft)	n	Width (inches)	Diam/Height (inches)	Inside-Fill (inches)
1	3P	384.50	384.00	10.0	0.0500	0.011	0.0	12.0	0.0

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 4

Time span=0.00-12.00 hrs, dt=0.01 hrs, 1201 points

Runoff by Rational method, Rise/Fall=1.0/1.0 xTc

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

**Subcatchment 1S: PRE-DEVELOPMENT** Runoff Area=46,055 sf 0.00% Impervious Runoff Depth=0.63"  
Flow Length=270' Slope=0.0250 '/' Tc=15.5 min C=0.69 Runoff=2.53 cfs 0.056 af

**Subcatchment 2S: POST-DEVELOPMENT** Runoff Area=46,055 sf 63.15% Impervious Runoff Depth=0.71"  
Flow Length=360' Slope=0.0150 '/' Tc=8.8 min C=0.77 Runoff=2.82 cfs 0.062 af

**Reach 4R: CURB CUT WIER** Avg. Flow Depth=0.19' Max Vel=4.94 fps Inflow=2.82 cfs 0.062 af  
n=0.013 L=4.0' S=0.0200 '/' Capacity=12.61 cfs Outflow=2.83 cfs 0.062 af

**Pond 3P: DETENTION POND** Peak Elev=385.57' Storage=1,038 cf Inflow=2.83 cfs 0.062 af  
12.0" Round Culvert n=0.011 L=10.0' S=0.0500 '/' Outflow=2.26 cfs 0.062 af

**Total Runoff Area = 2.115 ac Runoff Volume = 0.118 af Average Runoff Depth = 0.67"**  
**68.43% Pervious = 1.447 ac 31.57% Impervious = 0.668 ac**

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022  
Page 5

## Summary for Subcatchment 1S: PRE-DEVELOPMENT

Runoff = 2.53 cfs @ 0.26 hrs, Volume= 0.056 af, Depth= 0.63"


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Area (sf)	C	Description
31,035	0.65	GRAVEL PARKING
15,020	0.77	SHRUB POOR CONDITION BRUSH
46,055	0.69	Weighted Average
46,055		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
15.5	270	0.0250	0.29		Sheet Flow, SHEET FLOW SURFACE Range n= 0.130 P2= 4.19"

## Subcatchment 1S: PRE-DEVELOPMENT

Hydrograph

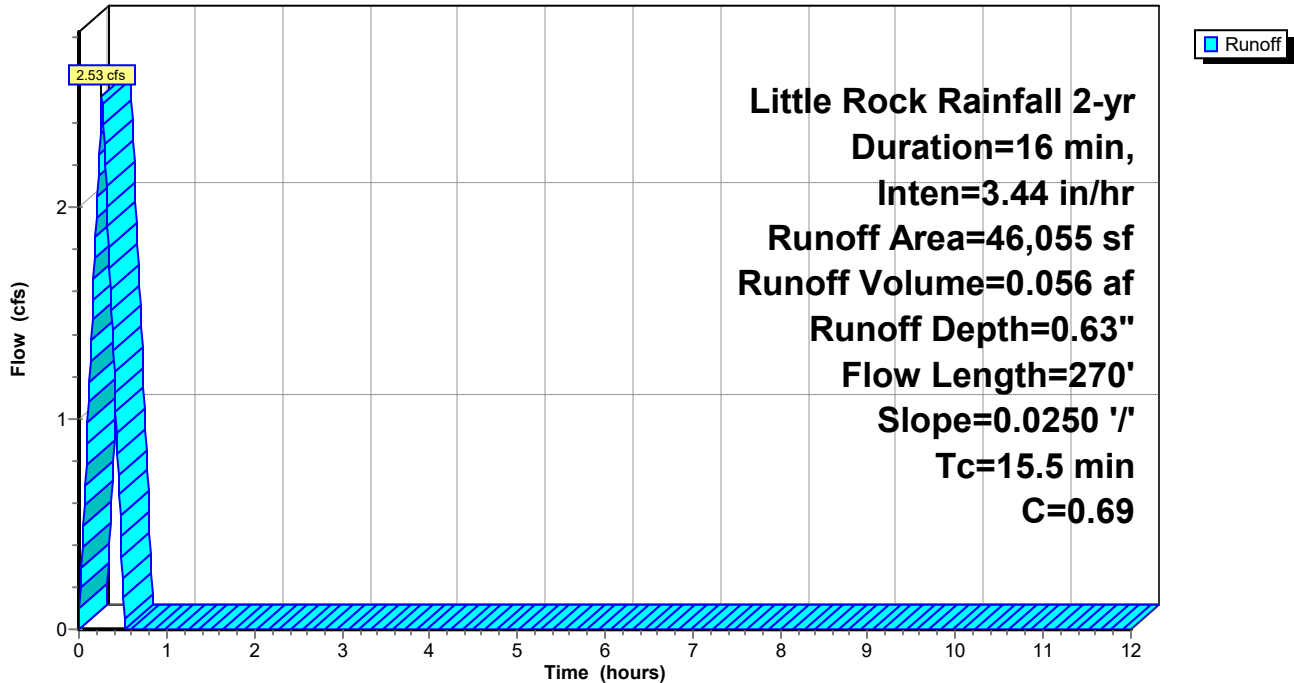

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 6

## Hydrograph for Subcatchment 1S: PRE-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	0.98	5.20	0.00	10.30	0.00
0.20	<b>1.96</b>	5.30	0.00	10.40	0.00
0.30	<b>2.20</b>	5.40	0.00	10.50	0.00
0.40	1.22	5.50	0.00	10.60	0.00
0.50	0.24	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022  
Page 7

## Summary for Subcatchment 2S: POST-DEVELOPMENT

Runoff = 2.82 cfs @ 0.15 hrs, Volume= 0.062 af, Depth= 0.71"  
Routed to Reach 4R : CURB CUT WIER


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Area (sf)	C	Description
22,479	0.95	ASPHALT SURFACE
6,603	0.97	ROOF TOP
16,973	0.46	GRASS LANDSCAPING
46,055	0.77	Weighted Average
16,973		36.85% Pervious Area
29,082		63.15% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	40	0.0150	0.10		<b>Sheet Flow, GRASS</b> Grass: Dense n= 0.240 P2= 4.19"
2.1	320	0.0150	2.49		<b>Shallow Concentrated Flow, PAVEMENT</b> Paved Kv= 20.3 fps
8.8	360	Total			

## Subcatchment 2S: POST-DEVELOPMENT

Hydrograph

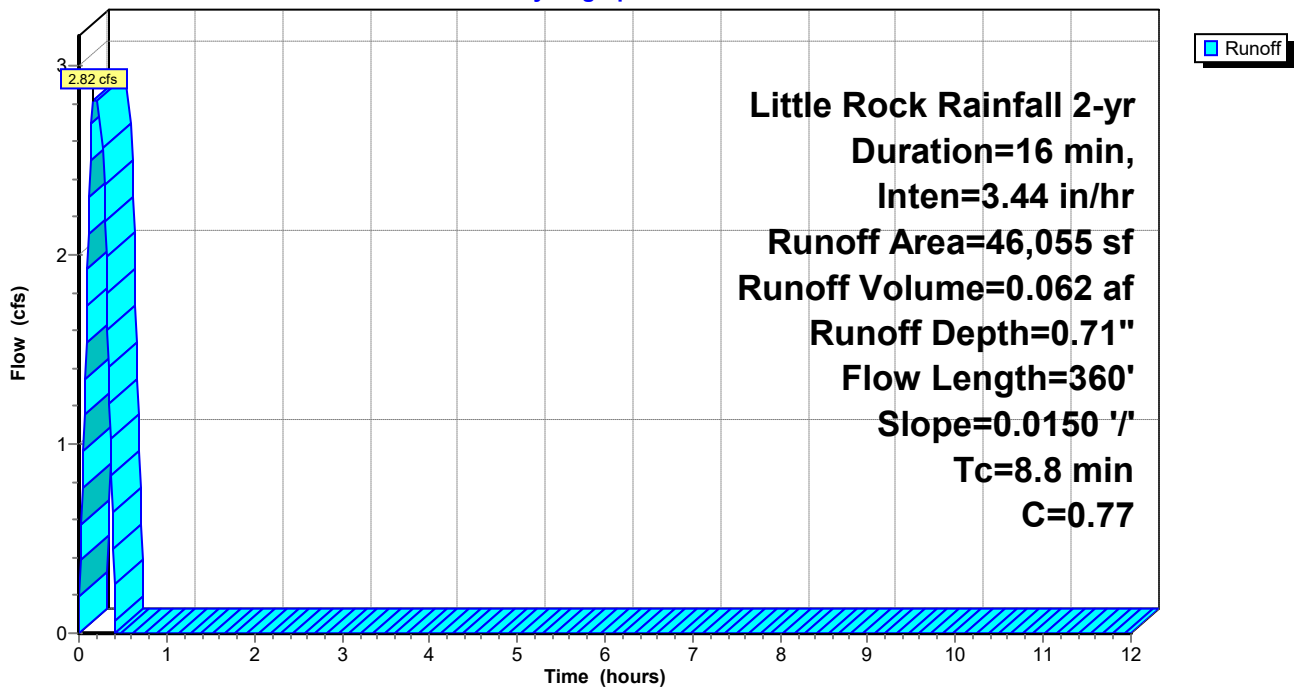

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 8

## Hydrograph for Subcatchment 2S: POST-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	<b>1.92</b>	5.20	0.00	10.30	0.00
0.20	<b>2.82</b>	5.30	0.00	10.40	0.00
0.30	2.18	5.40	0.00	10.50	0.00
0.40	0.26	5.50	0.00	10.60	0.00
0.50	0.00	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 9

## Summary for Reach 4R: CURB CUT WIER

[88] Warning: Qout>Qin may require smaller dt or Finer Routing

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 0.71" for 2-yr event  
Inflow = 2.82 cfs @ 0.15 hrs, Volume= 0.062 af  
Outflow = 2.83 cfs @ 0.16 hrs, Volume= 0.062 af, Atten= 0%, Lag= 0.6 min  
Routed to Pond 3P : DETENTION POND

Routing by Stor-Ind+Trans method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Max. Velocity= 4.94 fps, Min. Travel Time= 0.0 min  
Avg. Velocity = 3.92 fps, Avg. Travel Time= 0.0 min

Peak Storage= 2 cf @ 0.16 hrs  
Average Depth at Peak Storage= 0.19' , Surface Width= 3.00'  
Bank-Full Depth= 0.50' Flow Area= 1.5 sf, Capacity= 12.61 cfs

3.00' x 0.50' deep channel, n= 0.013 Concrete, trowel finish  
Length= 4.0' Slope= 0.0200 '/'  
Inlet Invert= 387.25', Outlet Invert= 387.17'



# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022  
Page 10


## Reach 4R: CURB CUT WIER

Hydrograph

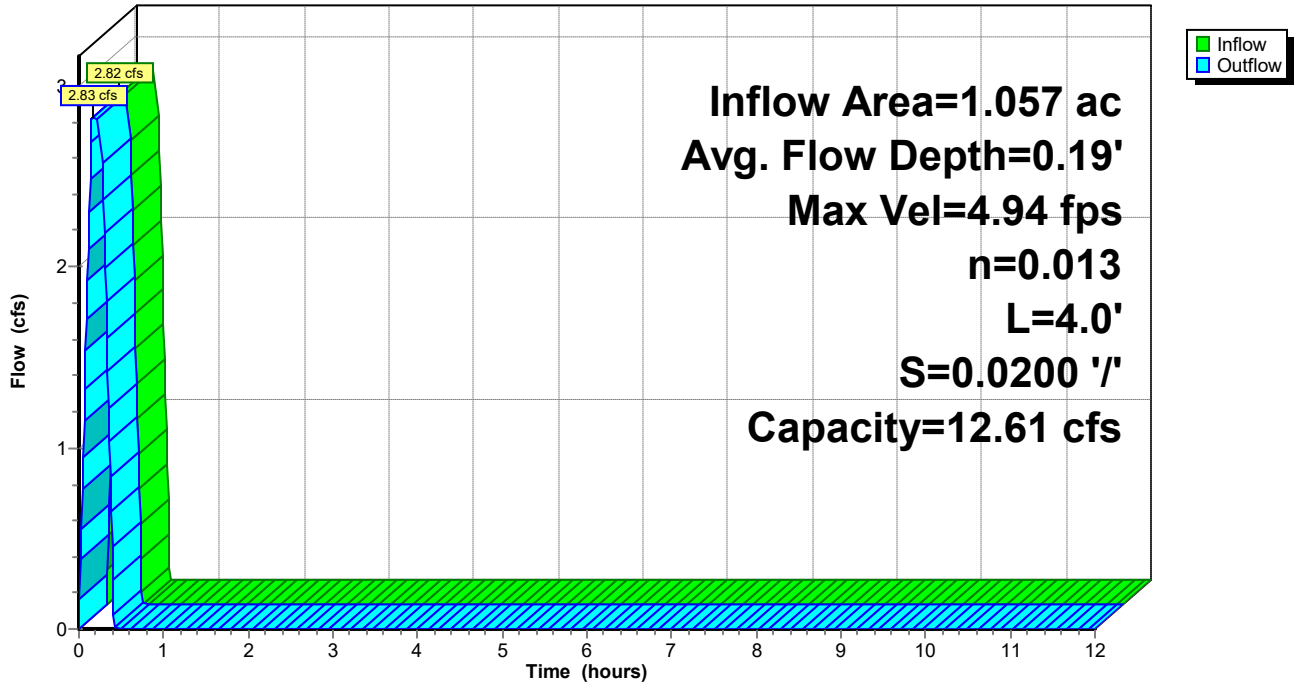

## Reach 4R: CURB CUT WIER

Stage-Discharge

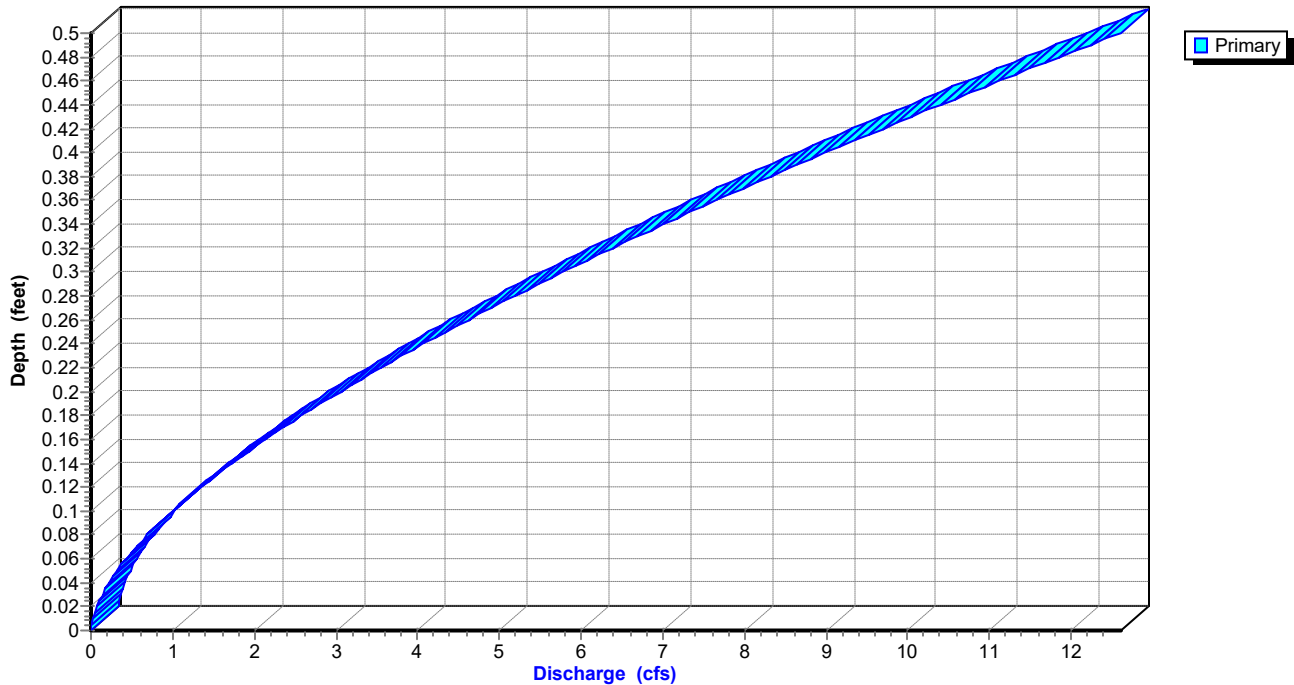

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 11

## Reach 4R: CURB CUT WIER

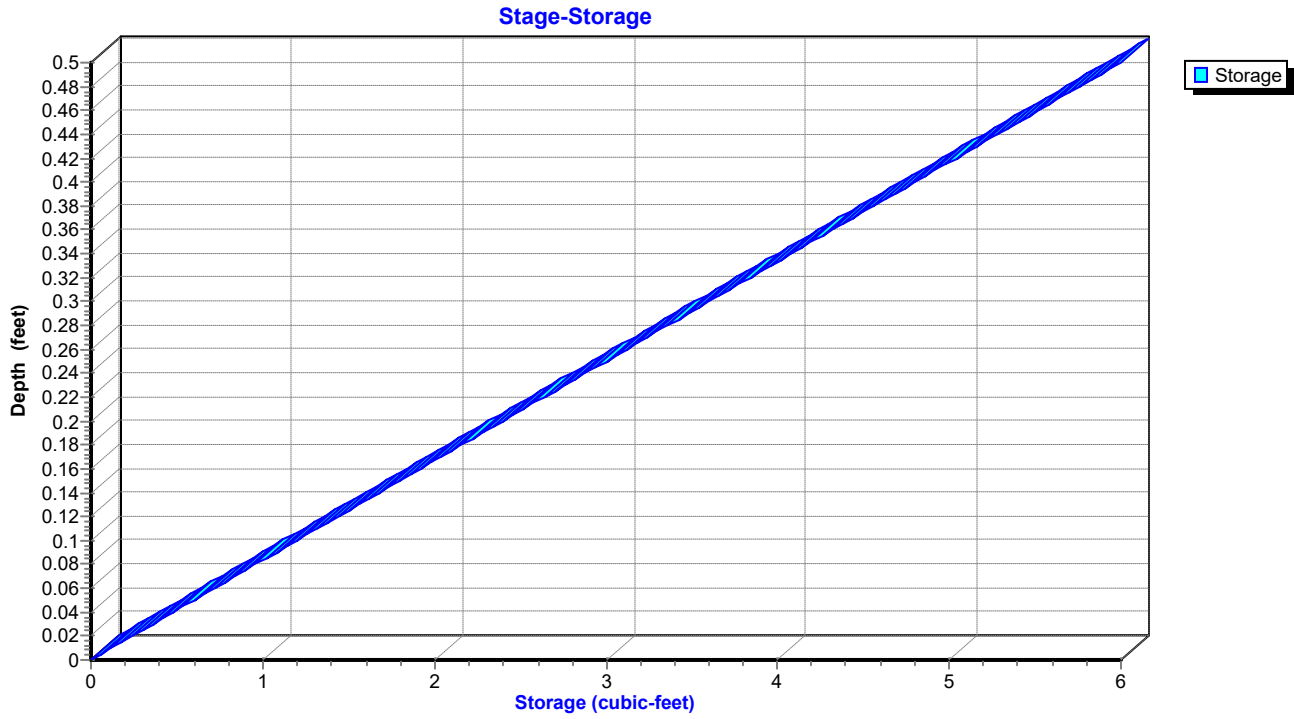

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 12

## Hydrograph for Reach 4R: CURB CUT WIER

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Outflow (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
1.00	0.00	0	387.25	0.00
1.50	0.00	0	387.25	0.00
2.00	0.00	0	387.25	0.00
2.50	0.00	0	387.25	0.00
3.00	0.00	0	387.25	0.00
3.50	0.00	0	387.25	0.00
4.00	0.00	0	387.25	0.00
4.50	0.00	0	387.25	0.00
5.00	0.00	0	387.25	0.00
5.50	0.00	0	387.25	0.00
6.00	0.00	0	387.25	0.00
6.50	0.00	0	387.25	0.00
7.00	0.00	0	387.25	0.00
7.50	0.00	0	387.25	0.00
8.00	0.00	0	387.25	0.00
8.50	0.00	0	387.25	0.00
9.00	0.00	0	387.25	0.00
9.50	0.00	0	387.25	0.00
10.00	0.00	0	387.25	0.00
10.50	0.00	0	387.25	0.00
11.00	0.00	0	387.25	0.00
11.50	0.00	0	387.25	0.00
12.00	0.00	0	387.25	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 13

## Stage-Discharge for Reach 4R: CURB CUT WIER

Elevation (feet)	Velocity (ft/sec)	Discharge (cfs)
387.25	0.00	0.00
387.26	0.75	0.02
387.27	1.18	0.07
387.28	1.54	0.14
387.29	1.86	0.22
387.30	2.15	0.32
387.31	2.41	0.43
387.32	2.66	0.56
387.33	2.90	0.70
387.34	3.12	0.84
387.35	3.34	1.00
387.36	3.54	1.17
387.37	3.74	1.35
387.38	3.92	1.53
387.39	4.11	1.72
387.40	4.28	1.93
387.41	4.45	2.14
387.42	4.62	2.36
387.43	4.78	2.58
387.44	4.93	2.81
387.45	5.09	3.05
387.46	5.23	3.30
387.47	5.38	3.55
387.48	5.52	3.81
387.49	5.65	4.07
387.50	5.79	4.34
387.51	5.92	4.62
387.52	6.05	4.90
387.53	6.17	5.19
387.54	6.30	5.48
387.55	6.42	5.77
387.56	6.53	6.08
387.57	6.65	6.38
387.58	6.76	6.69
387.59	6.87	7.01
387.60	6.98	7.33
387.61	7.09	7.65
387.62	7.19	7.98
387.63	7.30	8.32
387.64	7.40	8.65
387.65	7.50	9.00
387.66	7.59	9.34
387.67	7.69	9.69
387.68	7.79	10.04
387.69	7.88	10.40
387.70	7.97	10.76
387.71	8.06	11.12
387.72	8.15	11.49
387.73	8.24	11.86
387.74	8.32	12.23
387.75	<b>8.41</b>	<b>12.61</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 14

## Stage-Area-Storage for Reach 4R: CURB CUT WIER

Elevation (feet)	End-Area (sq-ft)	Storage (cubic-feet)
387.25	0.0	0
387.26	0.0	0
387.27	0.1	0
387.28	0.1	0
387.29	0.1	0
387.30	0.2	1
387.31	0.2	1
387.32	0.2	1
387.33	0.2	1
387.34	0.3	1
387.35	0.3	1
387.36	0.3	1
387.37	0.4	1
387.38	0.4	2
387.39	0.4	2
387.40	0.4	2
387.41	0.5	2
387.42	0.5	2
387.43	0.5	2
387.44	0.6	2
387.45	0.6	2
387.46	0.6	3
387.47	0.7	3
387.48	0.7	3
387.49	0.7	3
387.50	0.8	3
387.51	0.8	3
387.52	0.8	3
387.53	0.8	3
387.54	0.9	3
387.55	0.9	4
387.56	0.9	4
387.57	1.0	4
387.58	1.0	4
387.59	1.0	4
387.60	1.1	4
387.61	1.1	4
387.62	1.1	4
387.63	1.1	5
387.64	1.2	5
387.65	1.2	5
387.66	1.2	5
387.67	1.3	5
387.68	1.3	5
387.69	1.3	5
387.70	1.4	5
387.71	1.4	6
387.72	1.4	6
387.73	1.4	6
387.74	1.5	6
387.75	<b>1.5</b>	<b>6</b>



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 15

## Summary for Pond 3P: DETENTION POND

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 0.71" for 2-yr event  
 Inflow = 2.83 cfs @ 0.16 hrs, Volume= 0.062 af  
 Outflow = 2.26 cfs @ 0.30 hrs, Volume= 0.062 af, Atten= 20%, Lag= 8.2 min  
 Primary = 2.26 cfs @ 0.30 hrs, Volume= 0.062 af

Routing by Stor-Ind method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Peak Elev= 385.57' @ 0.30 hrs Surf.Area= 1,150 sf Storage= 1,038 cf

Plug-Flow detention time= 10.9 min calculated for 0.062 af (100% of inflow)  
 Center-of-Mass det. time= 10.8 min ( 23.3 - 12.4 )

Volume	Invert	Avail.Storage	Storage Description
#1	384.50'	2,986 cf	<b>Custom Stage Data (Prismatic)</b> Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
384.50	724	0	0
385.00	986	428	428
386.00	1,273	1,130	1,557
387.00	1,585	1,429	2,986

Device	Routing	Invert	Outlet Devices
#1	Primary	384.50'	<b>12.0" Round 12" RCP</b> L= 10.0' CMP, projecting, no headwall, Ke= 0.900 Inlet / Outlet Invert= 384.50' / 384.00' S= 0.0500 '/' Cc= 0.900 n= 0.011 Concrete pipe, straight & clean, Flow Area= 0.79 sf

**Primary OutFlow** Max=2.26 cfs @ 0.30 hrs HW=385.57' (Free Discharge)  
 ↑1=12" RCP (Inlet Controls 2.26 cfs @ 2.87 fps)

# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022  
Page 16


## Pond 3P: DETENTION POND

Hydrograph

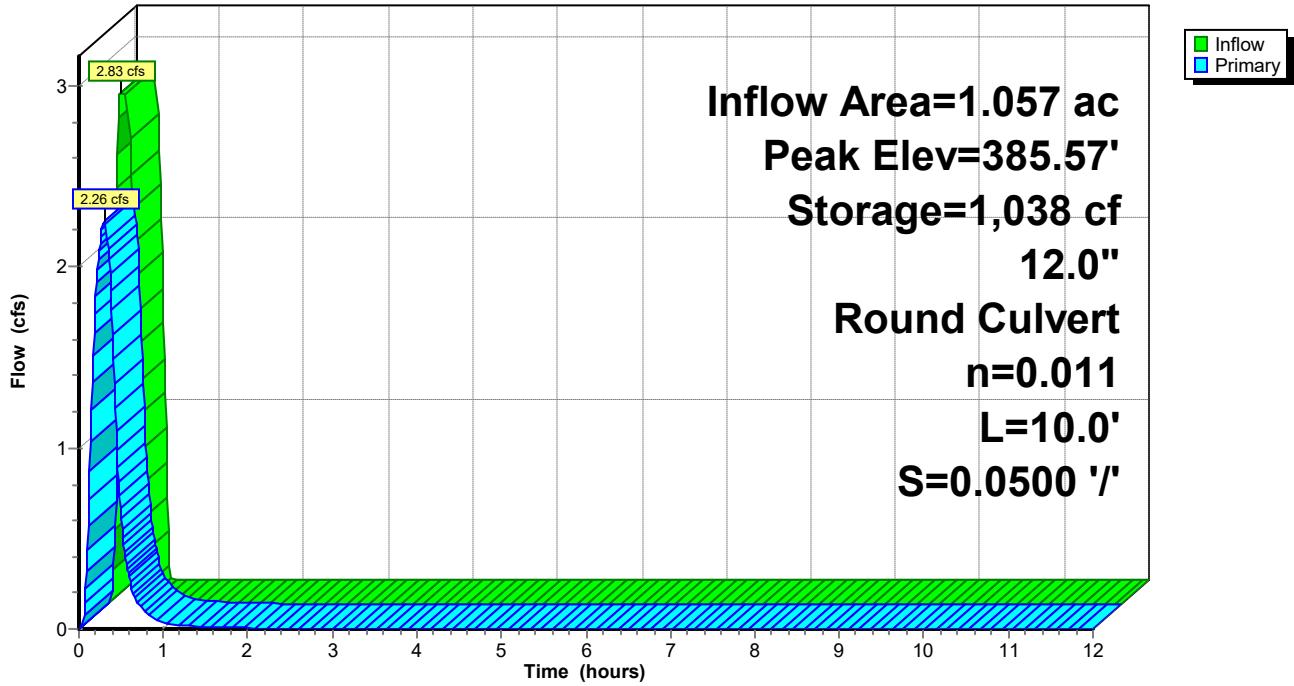

## Pond 3P: DETENTION POND

Stage-Discharge

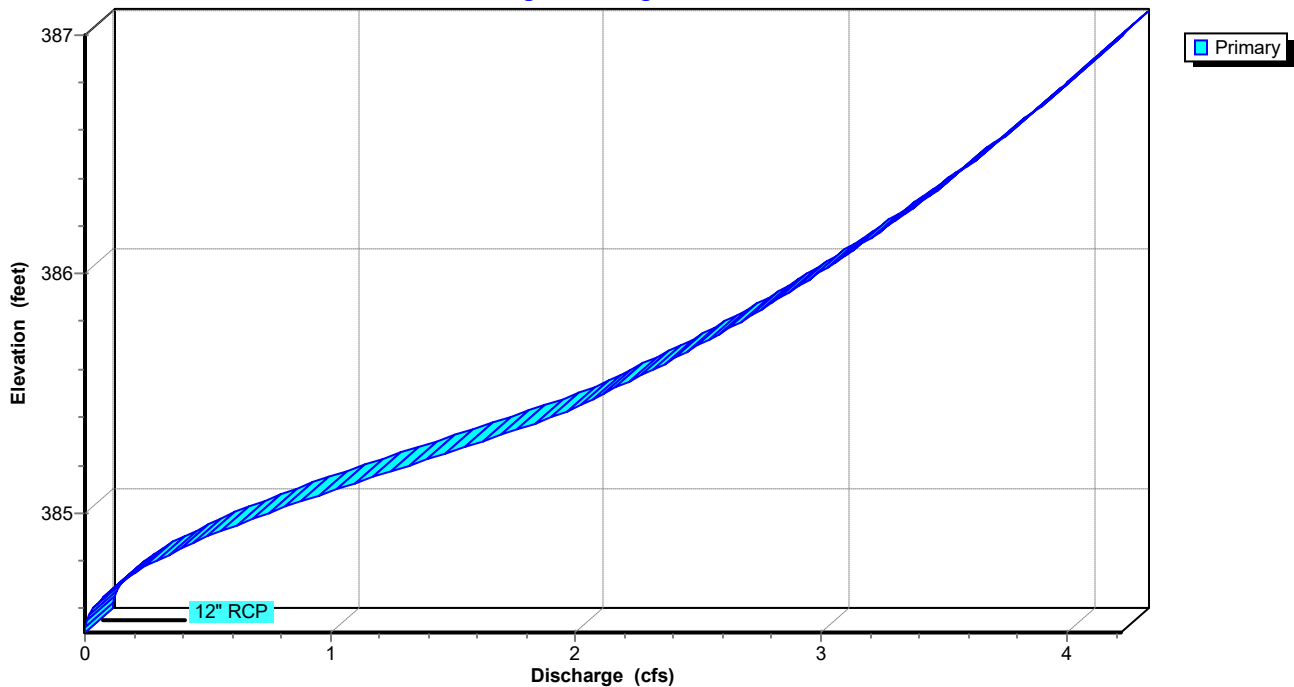

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 17

## Pond 3P: DETENTION POND

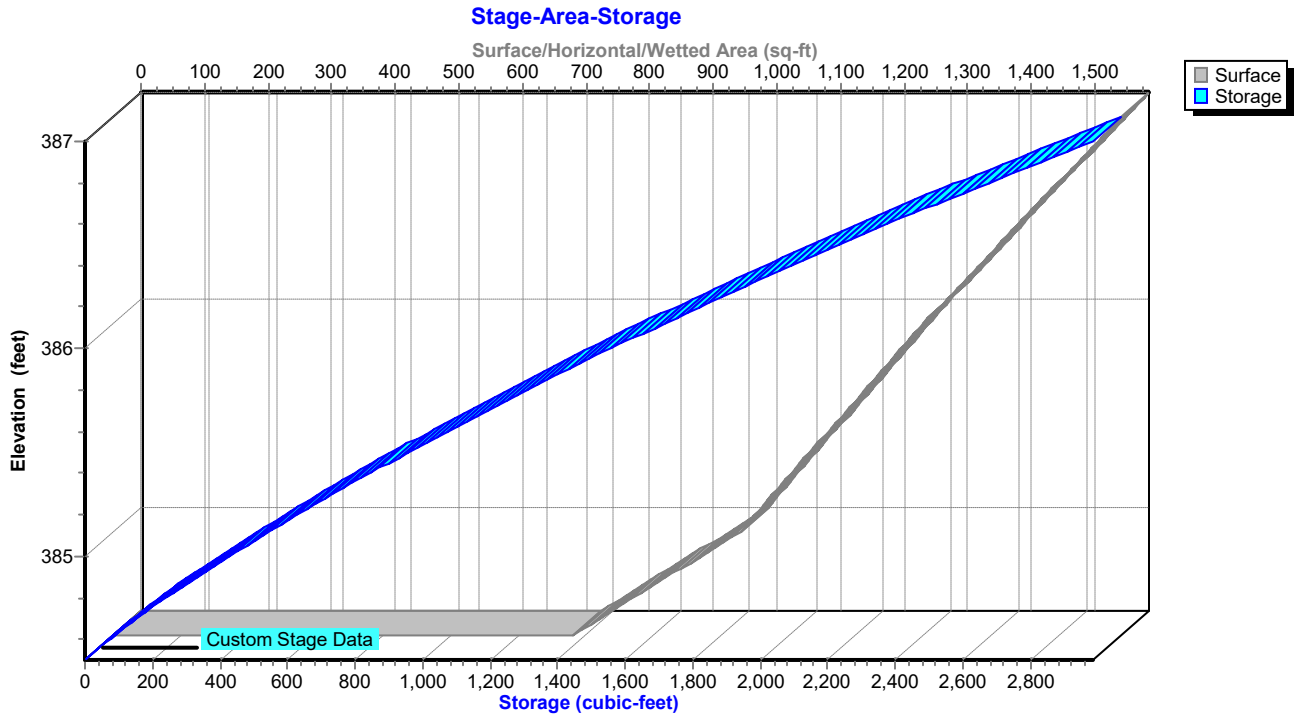

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr*

Printed 5/11/2022

Page 18

**Hydrograph for Pond 3P: DETENTION POND**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>384.50</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>375</b>	<b>384.95</b>	<b>0.61</b>
1.00	0.00	79	384.60	0.04
1.50	0.00	41	384.56	0.01
2.00	0.00	27	384.54	0.01
2.50	0.00	20	384.53	0.00
3.00	0.00	16	384.52	0.00
3.50	0.00	13	384.52	0.00
4.00	0.00	10	384.51	0.00
4.50	0.00	8	384.51	0.00
5.00	0.00	7	384.51	0.00
5.50	0.00	5	384.51	0.00
6.00	0.00	4	384.51	0.00
6.50	0.00	3	384.50	0.00
7.00	0.00	3	384.50	0.00
7.50	0.00	2	384.50	0.00
8.00	0.00	2	384.50	0.00
8.50	0.00	1	384.50	0.00
9.00	0.00	1	384.50	0.00
9.50	0.00	1	384.50	0.00
10.00	0.00	1	384.50	0.00
10.50	0.00	1	384.50	0.00
11.00	0.00	0	384.50	0.00
11.50	0.00	0	384.50	0.00
12.00	0.00	0	384.50	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 19

## Stage-Discharge for Pond 3P: DETENTION POND

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
384.50	0.00	385.52	2.15	386.54	3.70
384.52	0.00	385.54	2.19	386.56	3.73
384.54	0.01	385.56	2.23	386.58	3.75
384.56	0.01	385.58	2.27	386.60	3.78
384.58	0.02	385.60	2.31	386.62	3.80
384.60	0.03	385.62	2.35	386.64	3.82
384.62	0.05	385.64	2.39	386.66	3.85
384.64	0.07	385.66	2.43	386.68	3.87
384.66	0.09	385.68	2.46	386.70	3.89
384.68	0.11	385.70	2.50	386.72	3.92
384.70	0.13	385.72	2.53	386.74	3.94
384.72	0.16	385.74	2.57	386.76	3.96
384.74	0.19	385.76	2.60	386.78	3.98
384.76	0.22	385.78	2.64	386.80	4.01
384.78	0.26	385.80	2.67	386.82	4.03
384.80	0.29	385.82	2.70	386.84	4.05
384.82	0.33	385.84	2.74	386.86	4.07
384.84	0.37	385.86	2.77	386.88	4.09
384.86	0.41	385.88	2.80	386.90	4.12
384.88	0.45	385.90	2.83	386.92	4.14
384.90	0.50	385.92	2.86	386.94	4.16
384.92	0.55	385.94	2.89	386.96	4.18
384.94	0.59	385.96	2.93	386.98	4.20
384.96	0.64	385.98	2.96	387.00	<b>4.22</b>
384.98	0.69	386.00	2.99		
385.00	0.75	386.02	3.02		
385.02	0.80	386.04	3.04		
385.04	0.85	386.06	3.07		
385.06	0.91	386.08	3.10		
385.08	0.97	386.10	3.13		
385.10	1.02	386.12	3.16		
385.12	1.08	386.14	3.19		
385.14	1.14	386.16	3.22		
385.16	1.20	386.18	3.24		
385.18	1.26	386.20	3.27		
385.20	1.32	386.22	3.30		
385.22	1.38	386.24	3.32		
385.24	1.44	386.26	3.35		
385.26	1.50	386.28	3.38		
385.28	1.56	386.30	3.40		
385.30	1.62	386.32	3.43		
385.32	1.68	386.34	3.46		
385.34	1.74	386.36	3.48		
385.36	1.79	386.38	3.51		
385.38	1.85	386.40	3.53		
385.40	1.90	386.42	3.56		
385.42	1.95	386.44	3.58		
385.44	2.00	386.46	3.61		
385.46	2.04	386.48	3.63		
385.48	2.08	386.50	3.66		
385.50	2.11	386.52	3.68		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 2-yr Duration=16 min, Inten=3.44 in/hr

Printed 5/11/2022

Page 20

## Stage-Area-Storage for Pond 3P: DETENTION POND

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
384.50	724	0
384.55	750	37
384.60	776	75
384.65	803	114
384.70	829	155
384.75	855	197
384.80	881	241
384.85	907	285
384.90	934	332
384.95	960	379
385.00	986	428
385.05	1,000	477
385.10	1,015	528
385.15	1,029	579
385.20	1,043	630
385.25	1,058	683
385.30	1,072	736
385.35	1,086	790
385.40	1,101	845
385.45	1,115	900
385.50	1,130	956
385.55	1,144	1,013
385.60	1,158	1,071
385.65	1,173	1,129
385.70	1,187	1,188
385.75	1,201	1,248
385.80	1,216	1,308
385.85	1,230	1,369
385.90	1,244	1,431
385.95	1,259	1,494
386.00	1,273	1,557
386.05	1,289	1,621
386.10	1,304	1,686
386.15	1,320	1,751
386.20	1,335	1,818
386.25	1,351	1,885
386.30	1,367	1,953
386.35	1,382	2,022
386.40	1,398	2,091
386.45	1,413	2,161
386.50	1,429	2,233
386.55	1,445	2,304
386.60	1,460	2,377
386.65	1,476	2,450
386.70	1,491	2,525
386.75	1,507	2,600
386.80	1,523	2,675
386.85	1,538	2,752
386.90	1,554	2,829
386.95	1,569	2,907
387.00	<b>1,585</b>	<b>2,986</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 21

Time span=0.00-12.00 hrs, dt=0.01 hrs, 1201 points

Runoff by Rational method, Rise/Fall=1.0/1.0 xTc

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

**Subcatchment 1S: PRE-DEVELOPMENT** Runoff Area=46,055 sf 0.00% Impervious Runoff Depth=0.75"  
Flow Length=270' Slope=0.0250 '/' Tc=15.5 min C=0.69 Runoff=3.01 cfs 0.066 af

**Subcatchment 2S: POST-DEVELOPMENT** Runoff Area=46,055 sf 63.15% Impervious Runoff Depth=0.84"  
Flow Length=360' Slope=0.0150 '/' Tc=8.8 min C=0.77 Runoff=3.36 cfs 0.074 af

**Reach 4R: CURB CUT WIER** Avg. Flow Depth=0.21' Max Vel=5.27 fps Inflow=3.36 cfs 0.074 af  
n=0.013 L=4.0' S=0.0200 '/' Capacity=12.61 cfs Outflow=3.36 cfs 0.074 af

**Pond 3P: DETENTION POND** Peak Elev=385.75' Storage=1,253 cf Inflow=3.36 cfs 0.074 af  
12.0" Round Culvert n=0.011 L=10.0' S=0.0500 '/' Outflow=2.59 cfs 0.074 af

**Total Runoff Area = 2.115 ac Runoff Volume = 0.140 af Average Runoff Depth = 0.80"**  
**68.43% Pervious = 1.447 ac 31.57% Impervious = 0.668 ac**

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022  
Page 22

## Summary for Subcatchment 1S: PRE-DEVELOPMENT

Runoff = 3.01 cfs @ 0.26 hrs, Volume= 0.066 af, Depth= 0.75"


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Area (sf)	C	Description
31,035	0.65	GRAVEL PARKING
15,020	0.77	SHRUB POOR CONDITION BRUSH
46,055	0.69	Weighted Average
46,055		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
15.5	270	0.0250	0.29		Sheet Flow, SHEET FLOW SURFACE Range n= 0.130 P2= 4.19"

## Subcatchment 1S: PRE-DEVELOPMENT

Hydrograph

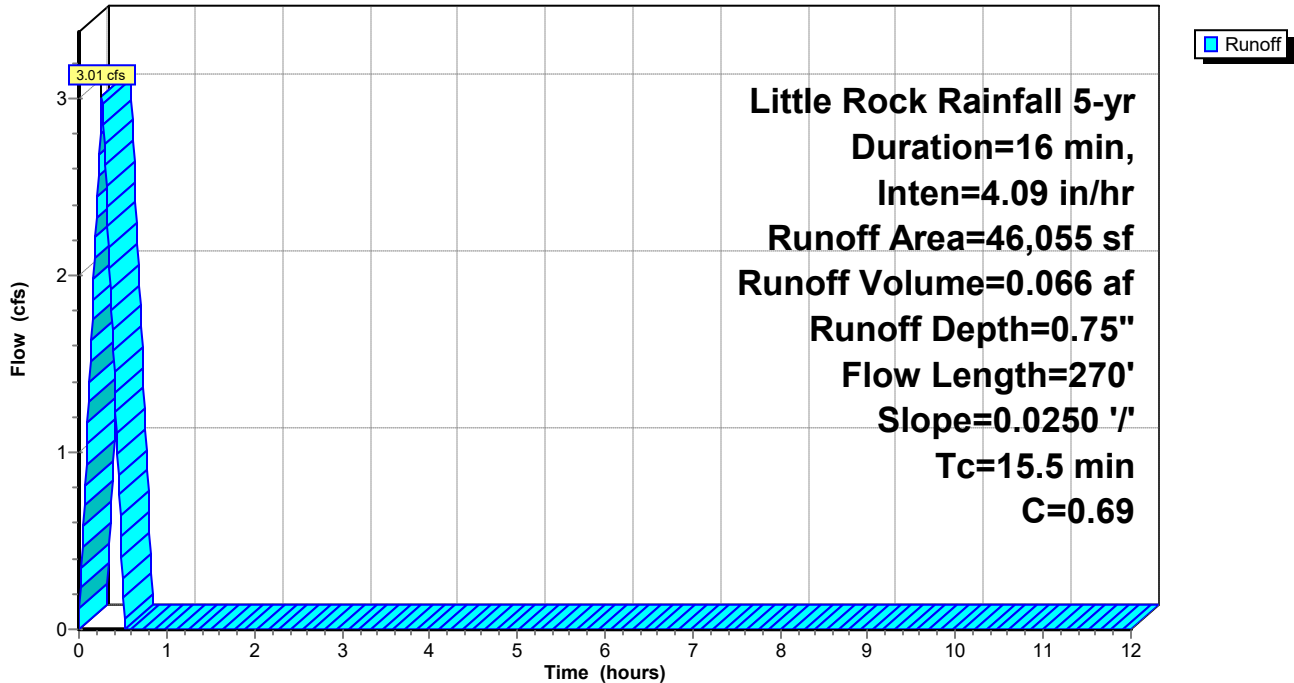



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 23

## Hydrograph for Subcatchment 1S: PRE-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	1.16	5.20	0.00	10.30	0.00
0.20	<b>2.33</b>	5.30	0.00	10.40	0.00
0.30	<b>2.62</b>	5.40	0.00	10.50	0.00
0.40	1.46	5.50	0.00	10.60	0.00
0.50	0.29	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022  
Page 24

## Summary for Subcatchment 2S: POST-DEVELOPMENT

Runoff = 3.36 cfs @ 0.15 hrs, Volume= 0.074 af, Depth= 0.84"  
Routed to Reach 4R : CURB CUT WIER


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Area (sf)	C	Description
22,479	0.95	ASPHALT SURFACE
6,603	0.97	ROOF TOP
16,973	0.46	GRASS LANDSCAPING
46,055	0.77	Weighted Average
16,973		36.85% Pervious Area
29,082		63.15% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	40	0.0150	0.10		<b>Sheet Flow, GRASS</b> Grass: Dense n= 0.240 P2= 4.19"
2.1	320	0.0150	2.49		<b>Shallow Concentrated Flow, PAVEMENT</b> Paved Kv= 20.3 fps
8.8	360	Total			

## Subcatchment 2S: POST-DEVELOPMENT

Hydrograph

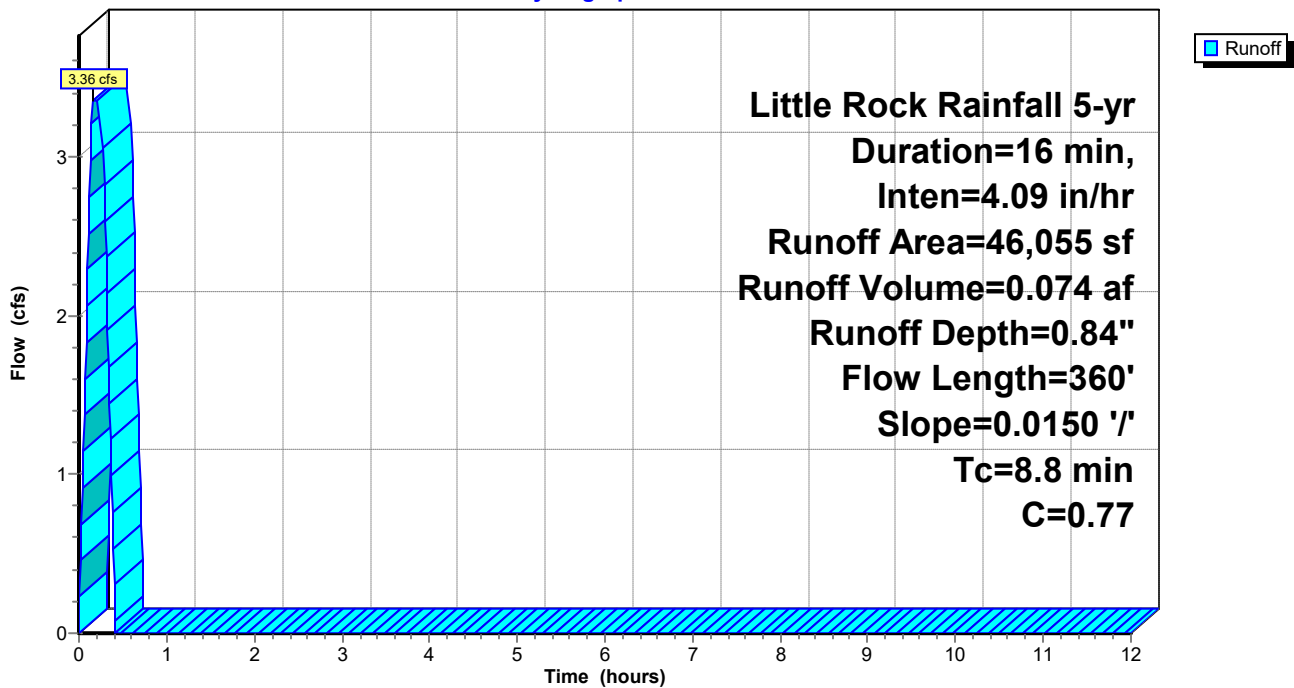

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 25

## Hydrograph for Subcatchment 2S: POST-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	<b>2.29</b>	5.20	0.00	10.30	0.00
0.20	<b>3.36</b>	5.30	0.00	10.40	0.00
0.30	2.59	5.40	0.00	10.50	0.00
0.40	0.31	5.50	0.00	10.60	0.00
0.50	0.00	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 26

## Summary for Reach 4R: CURB CUT WIER

[88] Warning: Qout>Qin may require smaller dt or Finer Routing

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 0.84" for 5-yr event  
Inflow = 3.36 cfs @ 0.15 hrs, Volume= 0.074 af  
Outflow = 3.36 cfs @ 0.16 hrs, Volume= 0.074 af, Atten= 0%, Lag= 0.6 min  
Routed to Pond 3P : DETENTION POND

Routing by Stor-Ind+Trans method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Max. Velocity= 5.27 fps, Min. Travel Time= 0.0 min  
Avg. Velocity= 4.18 fps, Avg. Travel Time= 0.0 min

Peak Storage= 3 cf @ 0.16 hrs  
Average Depth at Peak Storage= 0.21', Surface Width= 3.00'  
Bank-Full Depth= 0.50' Flow Area= 1.5 sf, Capacity= 12.61 cfs

3.00' x 0.50' deep channel, n= 0.013 Concrete, trowel finish  
Length= 4.0' Slope= 0.0200 '/'  
Inlet Invert= 387.25', Outlet Invert= 387.17'



# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022  
Page 27


## Reach 4R: CURB CUT WIER

Hydrograph

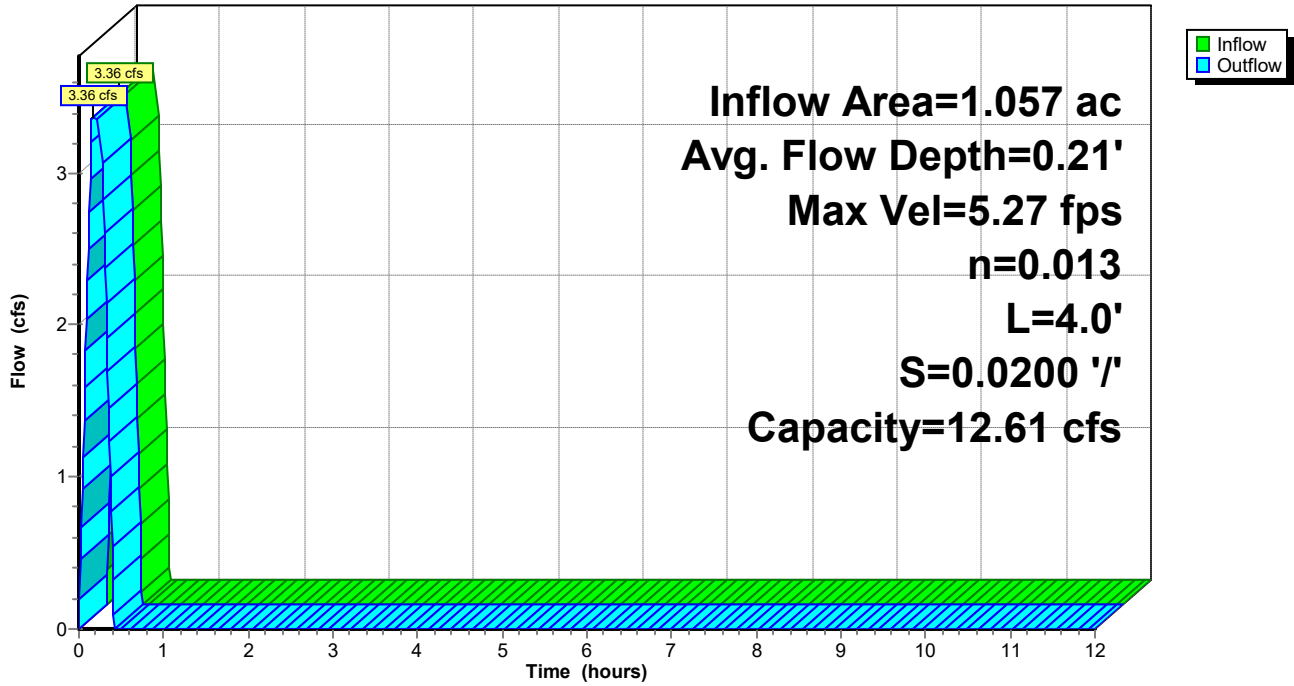

## Reach 4R: CURB CUT WIER

Stage-Discharge

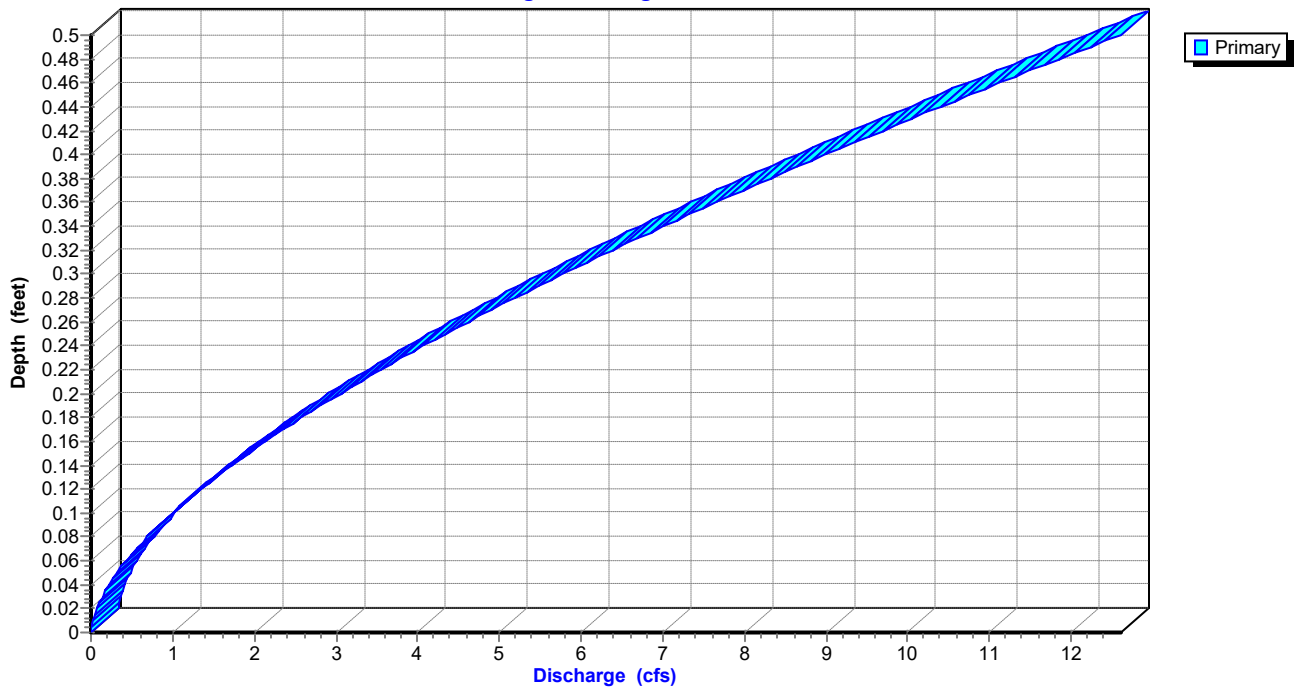

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 28

## Reach 4R: CURB CUT WIER

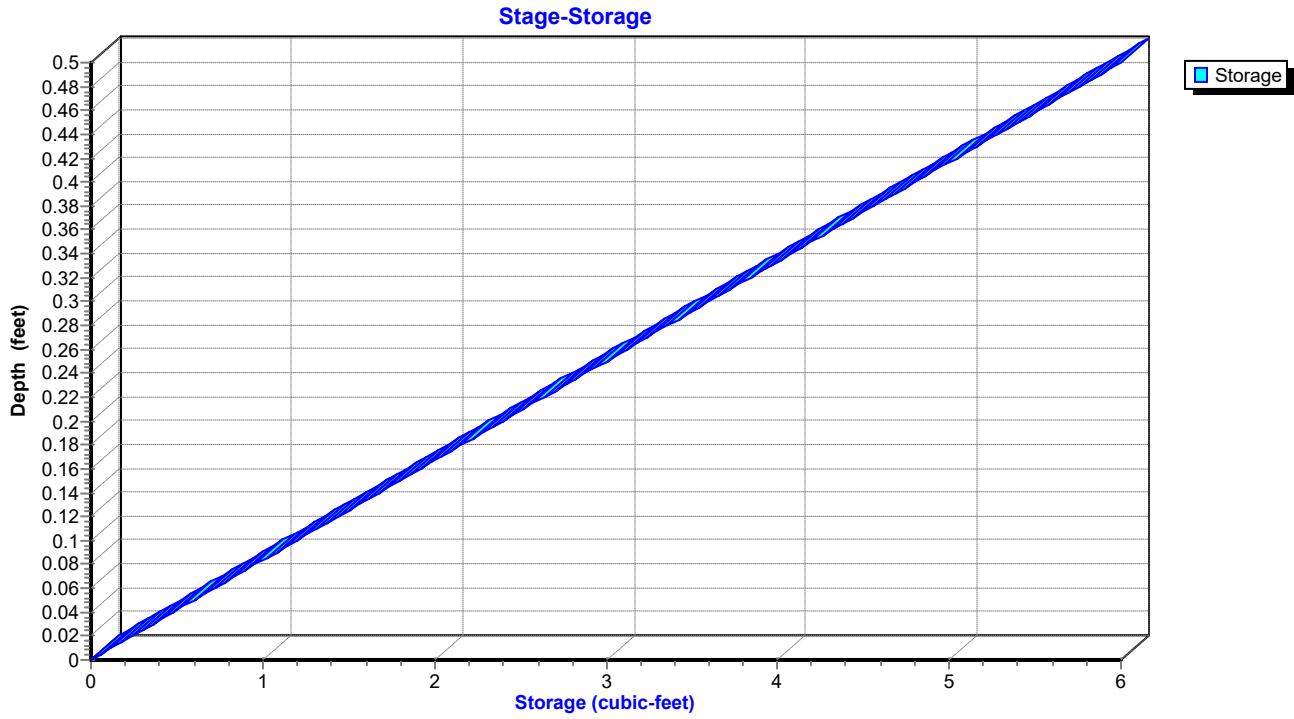

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 29

## Hydrograph for Reach 4R: CURB CUT WIER

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Outflow (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
1.00	0.00	0	387.25	0.00
1.50	0.00	0	387.25	0.00
2.00	0.00	0	387.25	0.00
2.50	0.00	0	387.25	0.00
3.00	0.00	0	387.25	0.00
3.50	0.00	0	387.25	0.00
4.00	0.00	0	387.25	0.00
4.50	0.00	0	387.25	0.00
5.00	0.00	0	387.25	0.00
5.50	0.00	0	387.25	0.00
6.00	0.00	0	387.25	0.00
6.50	0.00	0	387.25	0.00
7.00	0.00	0	387.25	0.00
7.50	0.00	0	387.25	0.00
8.00	0.00	0	387.25	0.00
8.50	0.00	0	387.25	0.00
9.00	0.00	0	387.25	0.00
9.50	0.00	0	387.25	0.00
10.00	0.00	0	387.25	0.00
10.50	0.00	0	387.25	0.00
11.00	0.00	0	387.25	0.00
11.50	0.00	0	387.25	0.00
12.00	0.00	0	387.25	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 30

## Stage-Discharge for Reach 4R: CURB CUT WIER

Elevation (feet)	Velocity (ft/sec)	Discharge (cfs)
387.25	0.00	0.00
387.26	0.75	0.02
387.27	1.18	0.07
387.28	1.54	0.14
387.29	1.86	0.22
387.30	2.15	0.32
387.31	2.41	0.43
387.32	2.66	0.56
387.33	2.90	0.70
387.34	3.12	0.84
387.35	3.34	1.00
387.36	3.54	1.17
387.37	3.74	1.35
387.38	3.92	1.53
387.39	4.11	1.72
387.40	4.28	1.93
387.41	4.45	2.14
387.42	4.62	2.36
387.43	4.78	2.58
387.44	4.93	2.81
387.45	5.09	3.05
387.46	5.23	3.30
387.47	5.38	3.55
387.48	5.52	3.81
387.49	5.65	4.07
387.50	5.79	4.34
387.51	5.92	4.62
387.52	6.05	4.90
387.53	6.17	5.19
387.54	6.30	5.48
387.55	6.42	5.77
387.56	6.53	6.08
387.57	6.65	6.38
387.58	6.76	6.69
387.59	6.87	7.01
387.60	6.98	7.33
387.61	7.09	7.65
387.62	7.19	7.98
387.63	7.30	8.32
387.64	7.40	8.65
387.65	7.50	9.00
387.66	7.59	9.34
387.67	7.69	9.69
387.68	7.79	10.04
387.69	7.88	10.40
387.70	7.97	10.76
387.71	8.06	11.12
387.72	8.15	11.49
387.73	8.24	11.86
387.74	8.32	12.23
387.75	<b>8.41</b>	<b>12.61</b>



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 31

## Stage-Area-Storage for Reach 4R: CURB CUT WIER

Elevation (feet)	End-Area (sq-ft)	Storage (cubic-feet)
387.25	0.0	0
387.26	0.0	0
387.27	0.1	0
387.28	0.1	0
387.29	0.1	0
387.30	0.2	1
387.31	0.2	1
387.32	0.2	1
387.33	0.2	1
387.34	0.3	1
387.35	0.3	1
387.36	0.3	1
387.37	0.4	1
387.38	0.4	2
387.39	0.4	2
387.40	0.4	2
387.41	0.5	2
387.42	0.5	2
387.43	0.5	2
387.44	0.6	2
387.45	0.6	2
387.46	0.6	3
387.47	0.7	3
387.48	0.7	3
387.49	0.7	3
387.50	0.8	3
387.51	0.8	3
387.52	0.8	3
387.53	0.8	3
387.54	0.9	3
387.55	0.9	4
387.56	0.9	4
387.57	1.0	4
387.58	1.0	4
387.59	1.0	4
387.60	1.1	4
387.61	1.1	4
387.62	1.1	4
387.63	1.1	5
387.64	1.2	5
387.65	1.2	5
387.66	1.2	5
387.67	1.3	5
387.68	1.3	5
387.69	1.3	5
387.70	1.4	5
387.71	1.4	6
387.72	1.4	6
387.73	1.4	6
387.74	1.5	6
387.75	<b>1.5</b>	<b>6</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 32

## Summary for Pond 3P: DETENTION POND

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 0.84" for 5-yr event  
 Inflow = 3.36 cfs @ 0.16 hrs, Volume= 0.074 af  
 Outflow = 2.59 cfs @ 0.30 hrs, Volume= 0.074 af, Atten= 23%, Lag= 8.4 min  
 Primary = 2.59 cfs @ 0.30 hrs, Volume= 0.074 af

Routing by Stor-Ind method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Peak Elev= 385.75' @ 0.30 hrs Surf.Area= 1,202 sf Storage= 1,253 cf

Plug-Flow detention time= 10.0 min calculated for 0.074 af (100% of inflow)  
 Center-of-Mass det. time= 10.4 min ( 22.9 - 12.4 )

Volume	Invert	Avail.Storage	Storage Description
#1	384.50'	2,986 cf	<b>Custom Stage Data (Prismatic)</b> Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
384.50	724	0	0
385.00	986	428	428
386.00	1,273	1,130	1,557
387.00	1,585	1,429	2,986

Device	Routing	Invert	Outlet Devices
#1	Primary	384.50'	<b>12.0" Round 12" RCP</b> L= 10.0' CMP, projecting, no headwall, Ke= 0.900 Inlet / Outlet Invert= 384.50' / 384.00' S= 0.0500 '/' Cc= 0.900 n= 0.011 Concrete pipe, straight & clean, Flow Area= 0.79 sf

**Primary OutFlow** Max=2.59 cfs @ 0.30 hrs HW=385.75' (Free Discharge)

↑ **1=12" RCP** (Inlet Controls 2.59 cfs @ 3.30 fps)

# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022  
Page 33


## Pond 3P: DETENTION POND

Hydrograph

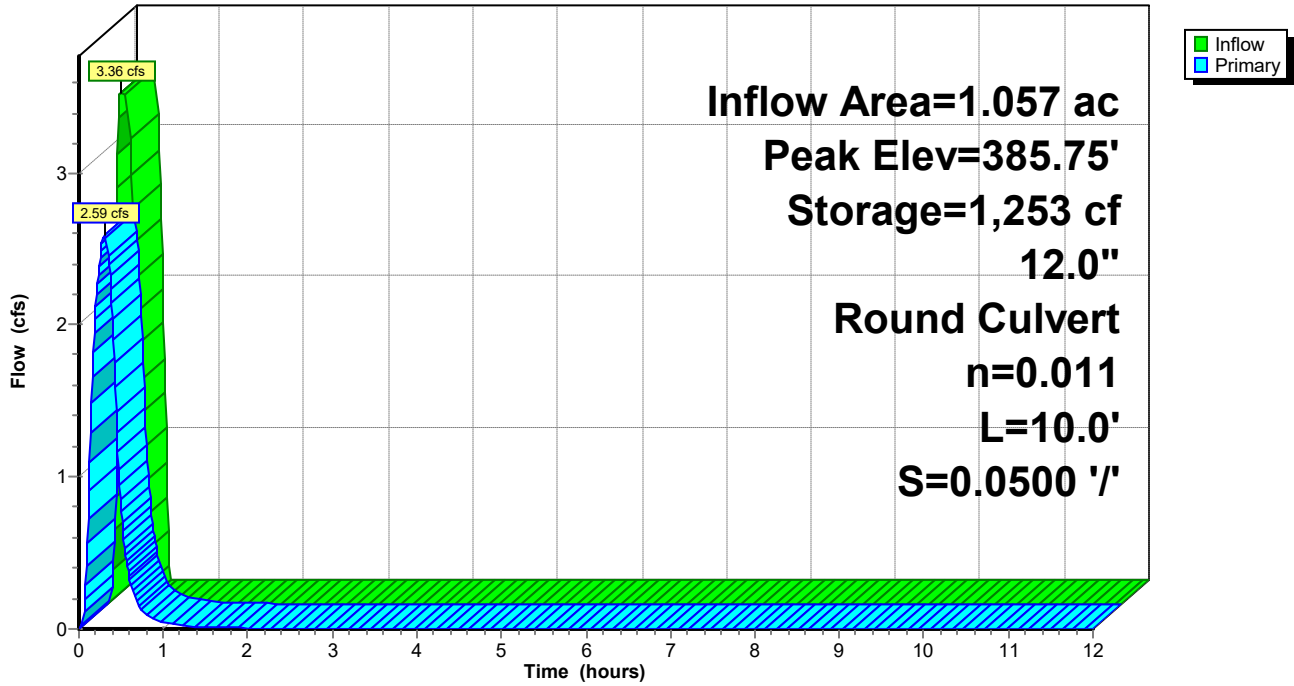

## Pond 3P: DETENTION POND

Stage-Discharge

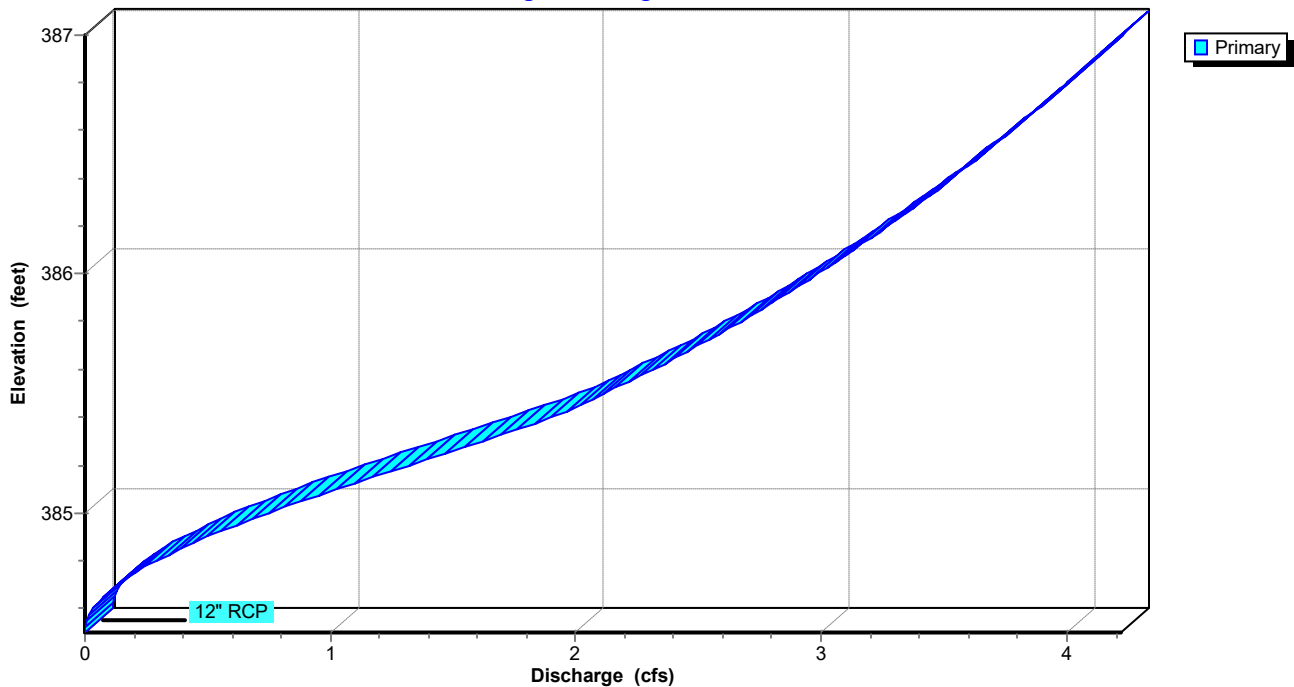

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 34

## Pond 3P: DETENTION POND

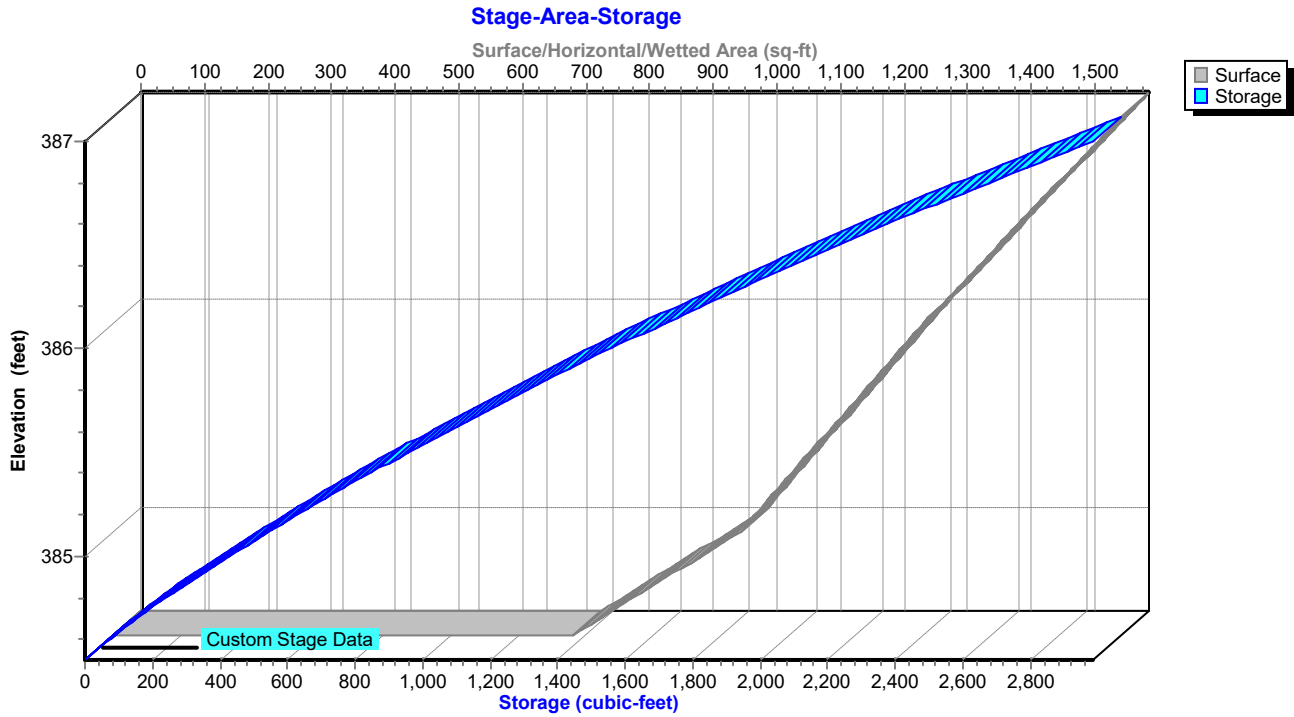

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr*

Printed 5/11/2022

Page 35

**Hydrograph for Pond 3P: DETENTION POND**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>384.50</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>439</b>	<b>385.01</b>	<b>0.78</b>
1.00	0.00	82	384.61	0.04
1.50	0.00	42	384.56	0.01
2.00	0.00	28	384.54	0.01
2.50	0.00	20	384.53	0.00
3.00	0.00	16	384.52	0.00
3.50	0.00	13	384.52	0.00
4.00	0.00	10	384.51	0.00
4.50	0.00	8	384.51	0.00
5.00	0.00	7	384.51	0.00
5.50	0.00	5	384.51	0.00
6.00	0.00	4	384.51	0.00
6.50	0.00	3	384.50	0.00
7.00	0.00	3	384.50	0.00
7.50	0.00	2	384.50	0.00
8.00	0.00	2	384.50	0.00
8.50	0.00	1	384.50	0.00
9.00	0.00	1	384.50	0.00
9.50	0.00	1	384.50	0.00
10.00	0.00	1	384.50	0.00
10.50	0.00	1	384.50	0.00
11.00	0.00	0	384.50	0.00
11.50	0.00	0	384.50	0.00
12.00	0.00	0	384.50	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 36

## Stage-Discharge for Pond 3P: DETENTION POND

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
384.50	0.00	385.52	2.15	386.54	3.70
384.52	0.00	385.54	2.19	386.56	3.73
384.54	0.01	385.56	2.23	386.58	3.75
384.56	0.01	385.58	2.27	386.60	3.78
384.58	0.02	385.60	2.31	386.62	3.80
384.60	0.03	385.62	2.35	386.64	3.82
384.62	0.05	385.64	2.39	386.66	3.85
384.64	0.07	385.66	2.43	386.68	3.87
384.66	0.09	385.68	2.46	386.70	3.89
384.68	0.11	385.70	2.50	386.72	3.92
384.70	0.13	385.72	2.53	386.74	3.94
384.72	0.16	385.74	2.57	386.76	3.96
384.74	0.19	385.76	2.60	386.78	3.98
384.76	0.22	385.78	2.64	386.80	4.01
384.78	0.26	385.80	2.67	386.82	4.03
384.80	0.29	385.82	2.70	386.84	4.05
384.82	0.33	385.84	2.74	386.86	4.07
384.84	0.37	385.86	2.77	386.88	4.09
384.86	0.41	385.88	2.80	386.90	4.12
384.88	0.45	385.90	2.83	386.92	4.14
384.90	0.50	385.92	2.86	386.94	4.16
384.92	0.55	385.94	2.89	386.96	4.18
384.94	0.59	385.96	2.93	386.98	4.20
384.96	0.64	385.98	2.96	387.00	<b>4.22</b>
384.98	0.69	386.00	2.99		
385.00	0.75	386.02	3.02		
385.02	0.80	386.04	3.04		
385.04	0.85	386.06	3.07		
385.06	0.91	386.08	3.10		
385.08	0.97	386.10	3.13		
385.10	1.02	386.12	3.16		
385.12	1.08	386.14	3.19		
385.14	1.14	386.16	3.22		
385.16	1.20	386.18	3.24		
385.18	1.26	386.20	3.27		
385.20	1.32	386.22	3.30		
385.22	1.38	386.24	3.32		
385.24	1.44	386.26	3.35		
385.26	1.50	386.28	3.38		
385.28	1.56	386.30	3.40		
385.30	1.62	386.32	3.43		
385.32	1.68	386.34	3.46		
385.34	1.74	386.36	3.48		
385.36	1.79	386.38	3.51		
385.38	1.85	386.40	3.53		
385.40	1.90	386.42	3.56		
385.42	1.95	386.44	3.58		
385.44	2.00	386.46	3.61		
385.46	2.04	386.48	3.63		
385.48	2.08	386.50	3.66		
385.50	2.11	386.52	3.68		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 5-yr Duration=16 min, Inten=4.09 in/hr

Printed 5/11/2022

Page 37

## Stage-Area-Storage for Pond 3P: DETENTION POND

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
384.50	724	0
384.55	750	37
384.60	776	75
384.65	803	114
384.70	829	155
384.75	855	197
384.80	881	241
384.85	907	285
384.90	934	332
384.95	960	379
385.00	986	428
385.05	1,000	477
385.10	1,015	528
385.15	1,029	579
385.20	1,043	630
385.25	1,058	683
385.30	1,072	736
385.35	1,086	790
385.40	1,101	845
385.45	1,115	900
385.50	1,130	956
385.55	1,144	1,013
385.60	1,158	1,071
385.65	1,173	1,129
385.70	1,187	1,188
385.75	1,201	1,248
385.80	1,216	1,308
385.85	1,230	1,369
385.90	1,244	1,431
385.95	1,259	1,494
386.00	1,273	1,557
386.05	1,289	1,621
386.10	1,304	1,686
386.15	1,320	1,751
386.20	1,335	1,818
386.25	1,351	1,885
386.30	1,367	1,953
386.35	1,382	2,022
386.40	1,398	2,091
386.45	1,413	2,161
386.50	1,429	2,233
386.55	1,445	2,304
386.60	1,460	2,377
386.65	1,476	2,450
386.70	1,491	2,525
386.75	1,507	2,600
386.80	1,523	2,675
386.85	1,538	2,752
386.90	1,554	2,829
386.95	1,569	2,907
387.00	<b>1,585</b>	<b>2,986</b>

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
*Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr*

Printed 5/11/2022  
Page 38

Time span=0.00-12.00 hrs, dt=0.01 hrs, 1201 points  
Runoff by Rational method, Rise/Fall=1.0/1.0 xTc  
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

**Subcatchment 1S: PRE-DEVELOPMENT** Runoff Area=46,055 sf 0.00% Impervious Runoff Depth=0.85"  
Flow Length=270' Slope=0.0250 '/' Tc=15.5 min C=0.69 Runoff=3.39 cfs 0.075 af

**Subcatchment 2S: POST-DEVELOPMENT** Runoff Area=46,055 sf 63.15% Impervious Runoff Depth=0.94"  
Flow Length=360' Slope=0.0150 '/' Tc=8.8 min C=0.77 Runoff=3.77 cfs 0.083 af

**Reach 4R: CURB CUT WIER** Avg. Flow Depth=0.23' Max Vel=5.50 fps Inflow=3.77 cfs 0.083 af  
n=0.013 L=4.0' S=0.0200 '/' Capacity=12.61 cfs Outflow=3.78 cfs 0.083 af

**Pond 3P: DETENTION POND** Peak Elev=385.90' Storage=1,433 cf Inflow=3.78 cfs 0.083 af  
12.0" Round Culvert n=0.011 L=10.0' S=0.0500 '/' Outflow=2.83 cfs 0.083 af

**Total Runoff Area = 2.115 ac Runoff Volume = 0.158 af Average Runoff Depth = 0.89"**  
**68.43% Pervious = 1.447 ac 31.57% Impervious = 0.668 ac**



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 39

## Summary for Subcatchment 1S: PRE-DEVELOPMENT

Runoff = 3.39 cfs @ 0.26 hrs, Volume= 0.075 af, Depth= 0.85"


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Area (sf)	C	Description
31,035	0.65	GRAVEL PARKING
15,020	0.77	SHRUB POOR CONDITION BRUSH
46,055	0.69	Weighted Average
46,055		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
15.5	270	0.0250	0.29		<b>Sheet Flow, SHEET FLOW SURFACE</b> Range n= 0.130 P2= 4.19"

## Subcatchment 1S: PRE-DEVELOPMENT

Hydrograph

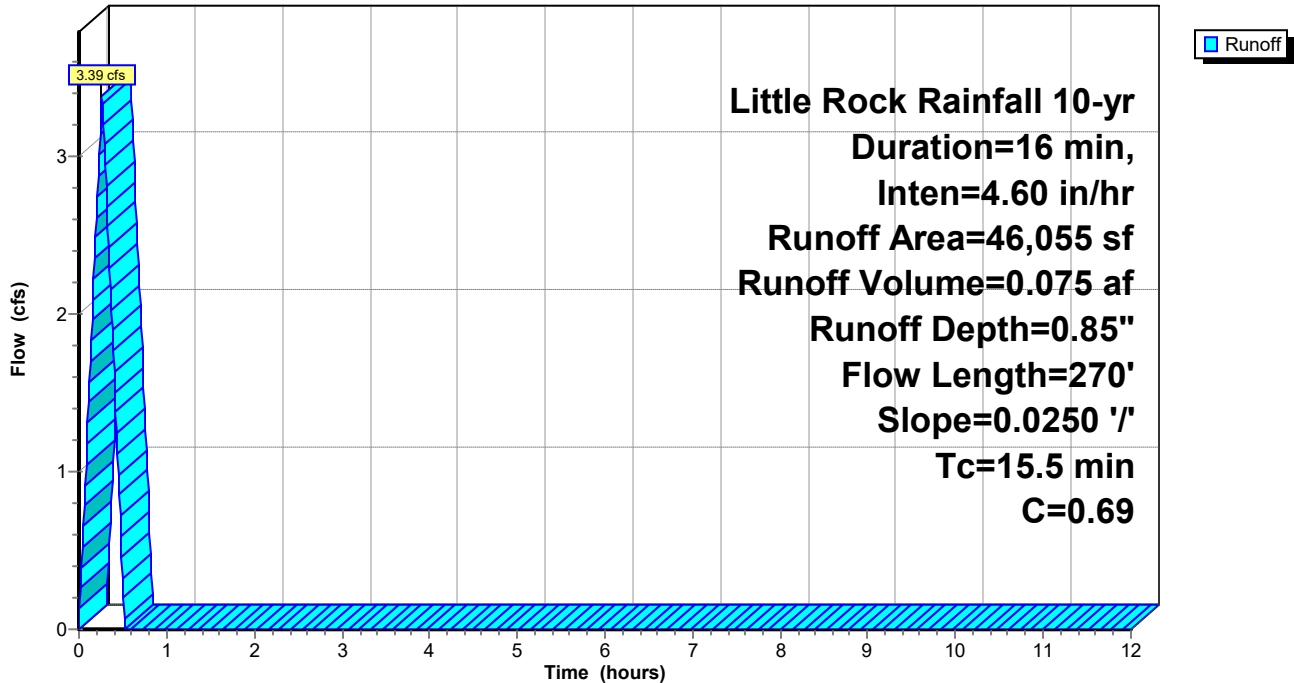

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 40

**Hydrograph for Subcatchment 1S: PRE-DEVELOPMENT**

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	1.31	5.20	0.00	10.30	0.00
0.20	<b>2.62</b>	5.30	0.00	10.40	0.00
0.30	<b>2.95</b>	5.40	0.00	10.50	0.00
0.40	1.64	5.50	0.00	10.60	0.00
0.50	0.33	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022  
Page 41

## Summary for Subcatchment 2S: POST-DEVELOPMENT

Runoff = 3.77 cfs @ 0.15 hrs, Volume= 0.083 af, Depth= 0.94"  
Routed to Reach 4R : CURB CUT WIER


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Area (sf)	C	Description
22,479	0.95	ASPHALT SURFACE
6,603	0.97	ROOF TOP
16,973	0.46	GRASS LANDSCAPING
46,055	0.77	Weighted Average
16,973		36.85% Pervious Area
29,082		63.15% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	40	0.0150	0.10		<b>Sheet Flow, GRASS</b> Grass: Dense n= 0.240 P2= 4.19"
2.1	320	0.0150	2.49		<b>Shallow Concentrated Flow, PAVEMENT</b> Paved Kv= 20.3 fps
8.8	360	Total			

## Subcatchment 2S: POST-DEVELOPMENT

Hydrograph

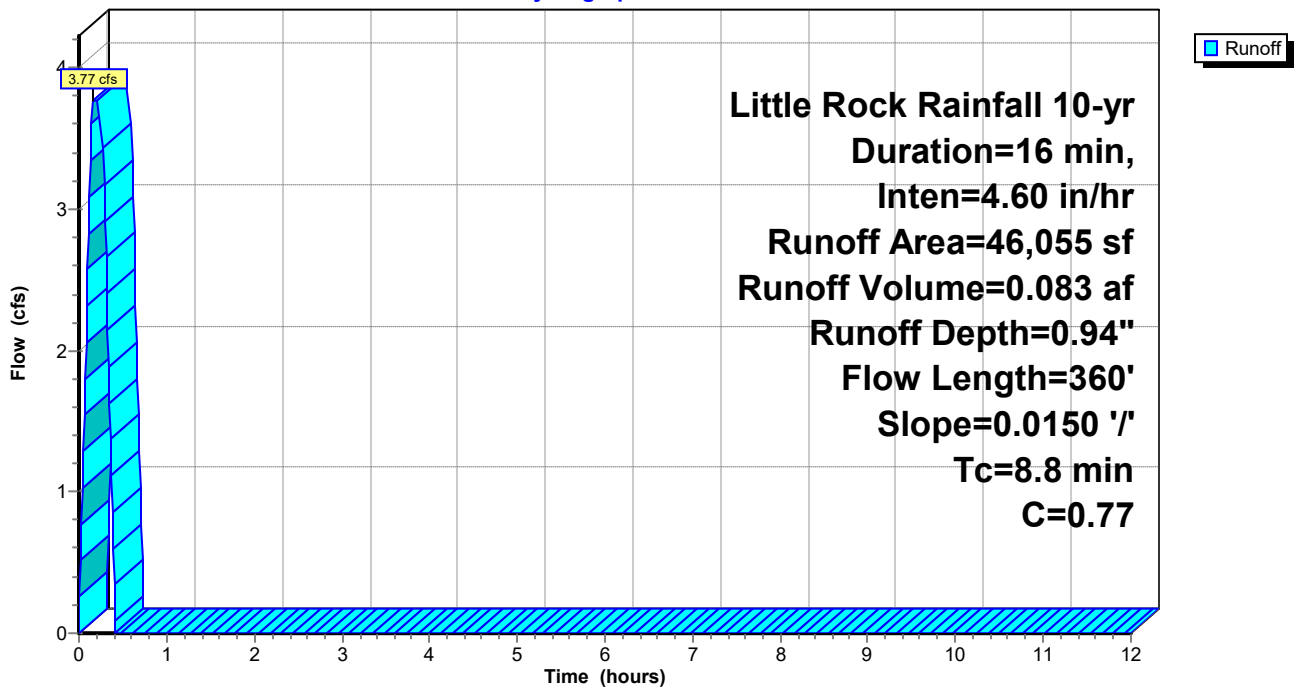

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022  
Page 42

**Hydrograph for Subcatchment 2S: POST-DEVELOPMENT**

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	<b>2.57</b>	5.20	0.00	10.30	0.00
0.20	<b>3.77</b>	5.30	0.00	10.40	0.00
0.30	2.92	5.40	0.00	10.50	0.00
0.40	0.34	5.50	0.00	10.60	0.00
0.50	0.00	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 43

## Summary for Reach 4R: CURB CUT WIER

[88] Warning: Qout>Qin may require smaller dt or Finer Routing

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 0.94" for 10-yr event  
Inflow = 3.77 cfs @ 0.15 hrs, Volume= 0.083 af  
Outflow = 3.78 cfs @ 0.16 hrs, Volume= 0.083 af, Atten= 0%, Lag= 0.6 min  
Routed to Pond 3P : DETENTION POND

Routing by Stor-Ind+Trans method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Max. Velocity= 5.50 fps, Min. Travel Time= 0.0 min  
Avg. Velocity= 4.37 fps, Avg. Travel Time= 0.0 min

Peak Storage= 3 cf @ 0.16 hrs  
Average Depth at Peak Storage= 0.23' , Surface Width= 3.00'  
Bank-Full Depth= 0.50' Flow Area= 1.5 sf, Capacity= 12.61 cfs

3.00' x 0.50' deep channel, n= 0.013 Concrete, trowel finish  
Length= 4.0' Slope= 0.0200 '/'  
Inlet Invert= 387.25', Outlet Invert= 387.17'



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas


Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 44


## Reach 4R: CURB CUT WIER

Hydrograph

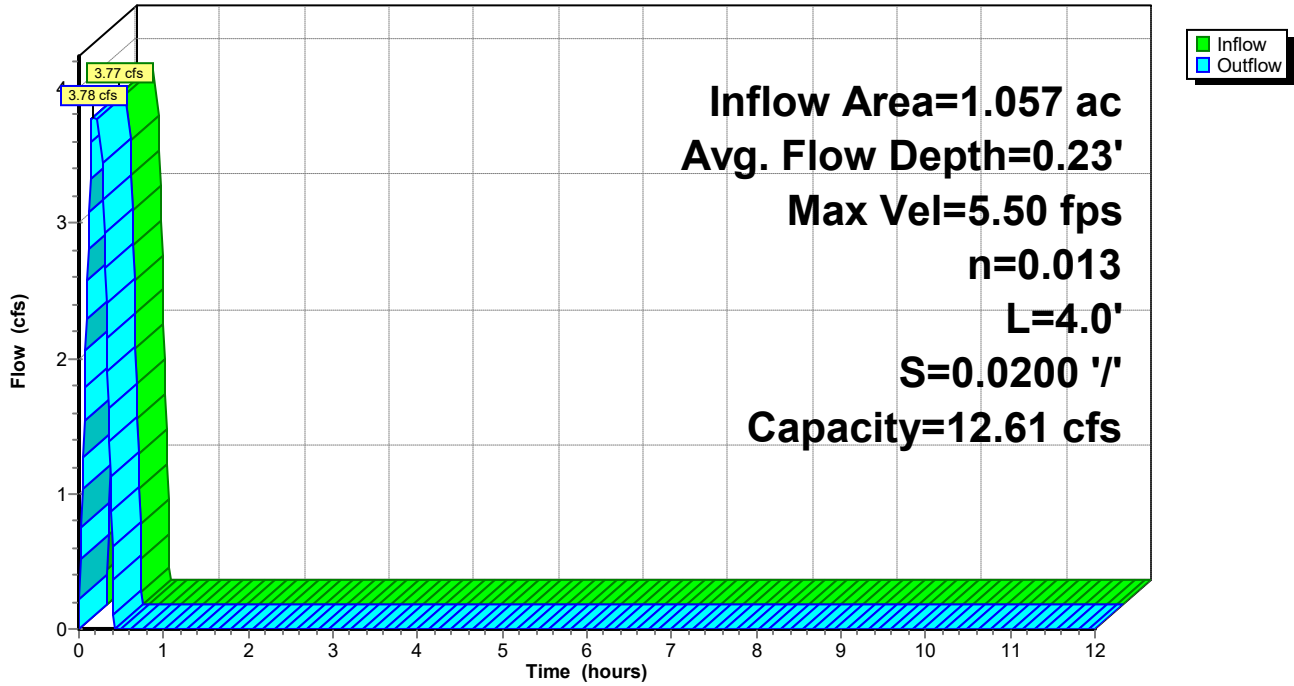

## Reach 4R: CURB CUT WIER

Stage-Discharge

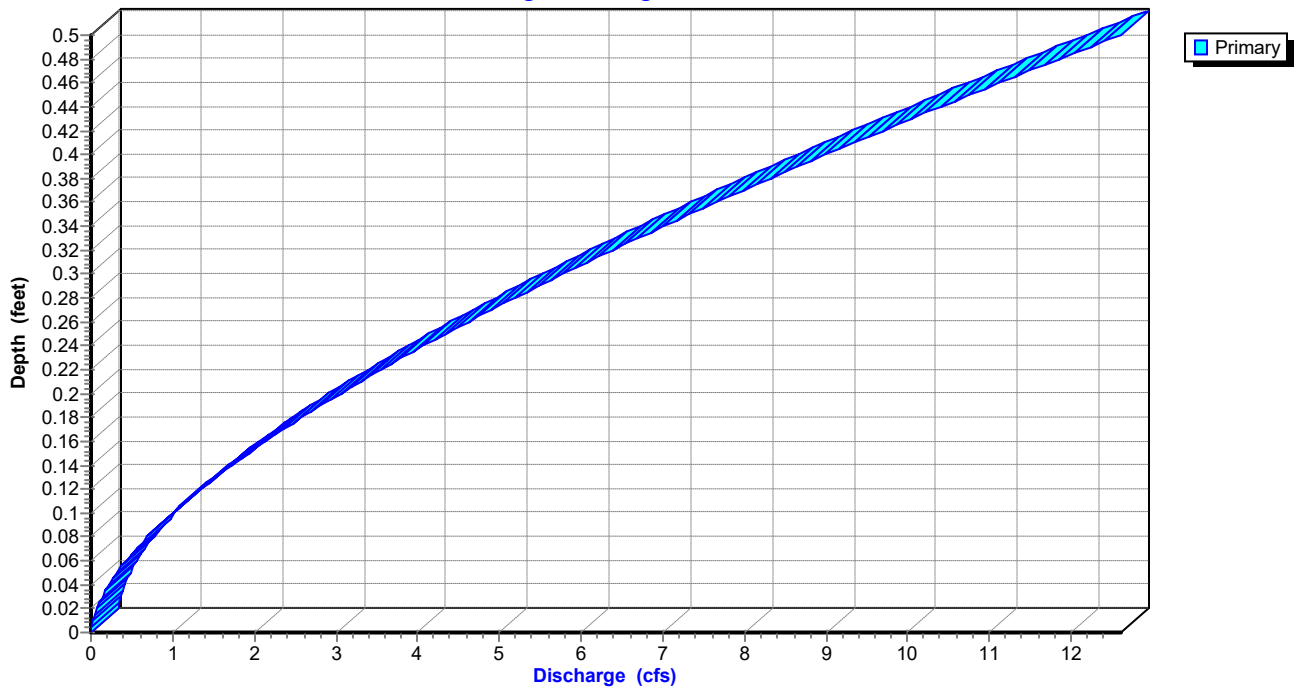


# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022  
Page 45

## Reach 4R: CURB CUT WIER

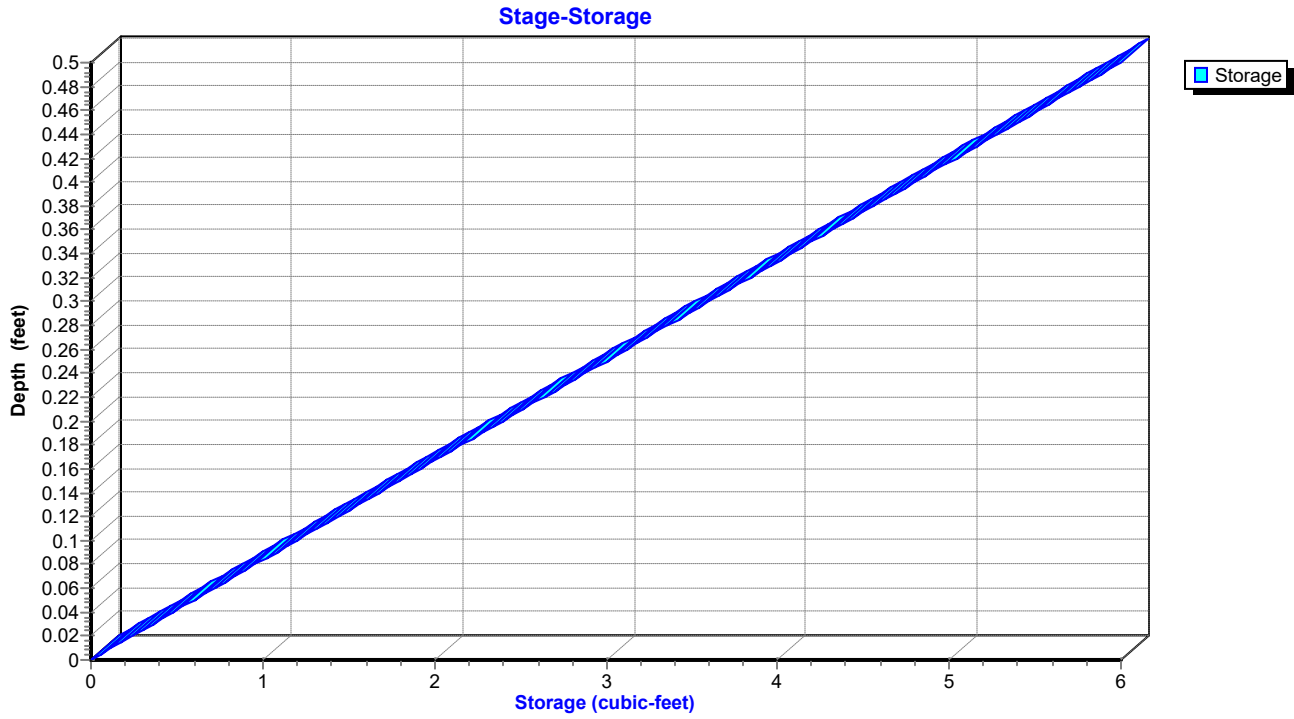

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr*

Printed 5/11/2022

Page 46

**Hydrograph for Reach 4R: CURB CUT WIER**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Outflow (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
1.00	0.00	0	387.25	0.00
1.50	0.00	0	387.25	0.00
2.00	0.00	0	387.25	0.00
2.50	0.00	0	387.25	0.00
3.00	0.00	0	387.25	0.00
3.50	0.00	0	387.25	0.00
4.00	0.00	0	387.25	0.00
4.50	0.00	0	387.25	0.00
5.00	0.00	0	387.25	0.00
5.50	0.00	0	387.25	0.00
6.00	0.00	0	387.25	0.00
6.50	0.00	0	387.25	0.00
7.00	0.00	0	387.25	0.00
7.50	0.00	0	387.25	0.00
8.00	0.00	0	387.25	0.00
8.50	0.00	0	387.25	0.00
9.00	0.00	0	387.25	0.00
9.50	0.00	0	387.25	0.00
10.00	0.00	0	387.25	0.00
10.50	0.00	0	387.25	0.00
11.00	0.00	0	387.25	0.00
11.50	0.00	0	387.25	0.00
12.00	0.00	0	387.25	0.00



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 47

## Stage-Discharge for Reach 4R: CURB CUT WIER

Elevation (feet)	Velocity (ft/sec)	Discharge (cfs)
387.25	0.00	0.00
387.26	0.75	0.02
387.27	1.18	0.07
387.28	1.54	0.14
387.29	1.86	0.22
387.30	2.15	0.32
387.31	2.41	0.43
387.32	2.66	0.56
387.33	2.90	0.70
387.34	3.12	0.84
387.35	3.34	1.00
387.36	3.54	1.17
387.37	3.74	1.35
387.38	3.92	1.53
387.39	4.11	1.72
387.40	4.28	1.93
387.41	4.45	2.14
387.42	4.62	2.36
387.43	4.78	2.58
387.44	4.93	2.81
387.45	5.09	3.05
387.46	5.23	3.30
387.47	5.38	3.55
387.48	5.52	3.81
387.49	5.65	4.07
387.50	5.79	4.34
387.51	5.92	4.62
387.52	6.05	4.90
387.53	6.17	5.19
387.54	6.30	5.48
387.55	6.42	5.77
387.56	6.53	6.08
387.57	6.65	6.38
387.58	6.76	6.69
387.59	6.87	7.01
387.60	6.98	7.33
387.61	7.09	7.65
387.62	7.19	7.98
387.63	7.30	8.32
387.64	7.40	8.65
387.65	7.50	9.00
387.66	7.59	9.34
387.67	7.69	9.69
387.68	7.79	10.04
387.69	7.88	10.40
387.70	7.97	10.76
387.71	8.06	11.12
387.72	8.15	11.49
387.73	8.24	11.86
387.74	8.32	12.23
387.75	<b>8.41</b>	<b>12.61</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 48

## Stage-Area-Storage for Reach 4R: CURB CUT WIER

Elevation (feet)	End-Area (sq-ft)	Storage (cubic-feet)
387.25	0.0	0
387.26	0.0	0
387.27	0.1	0
387.28	0.1	0
387.29	0.1	0
387.30	0.2	1
387.31	0.2	1
387.32	0.2	1
387.33	0.2	1
387.34	0.3	1
387.35	0.3	1
387.36	0.3	1
387.37	0.4	1
387.38	0.4	2
387.39	0.4	2
387.40	0.4	2
387.41	0.5	2
387.42	0.5	2
387.43	0.5	2
387.44	0.6	2
387.45	0.6	2
387.46	0.6	3
387.47	0.7	3
387.48	0.7	3
387.49	0.7	3
387.50	0.8	3
387.51	0.8	3
387.52	0.8	3
387.53	0.8	3
387.54	0.9	3
387.55	0.9	4
387.56	0.9	4
387.57	1.0	4
387.58	1.0	4
387.59	1.0	4
387.60	1.1	4
387.61	1.1	4
387.62	1.1	4
387.63	1.1	5
387.64	1.2	5
387.65	1.2	5
387.66	1.2	5
387.67	1.3	5
387.68	1.3	5
387.69	1.3	5
387.70	1.4	5
387.71	1.4	6
387.72	1.4	6
387.73	1.4	6
387.74	1.5	6
387.75	<b>1.5</b>	<b>6</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 49

## Summary for Pond 3P: DETENTION POND

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 0.94" for 10-yr event  
 Inflow = 3.78 cfs @ 0.16 hrs, Volume= 0.083 af  
 Outflow = 2.83 cfs @ 0.30 hrs, Volume= 0.083 af, Atten= 25%, Lag= 8.6 min  
 Primary = 2.83 cfs @ 0.30 hrs, Volume= 0.083 af

Routing by Stor-Ind method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Peak Elev= 385.90' @ 0.30 hrs Surf.Area= 1,245 sf Storage= 1,433 cf

Plug-Flow detention time= 9.9 min calculated for 0.083 af (100% of inflow)  
 Center-of-Mass det. time= 10.3 min ( 22.7 - 12.4 )

Volume	Invert	Avail.Storage	Storage Description
#1	384.50'	2,986 cf	<b>Custom Stage Data (Prismatic)</b> Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
384.50	724	0	0
385.00	986	428	428
386.00	1,273	1,130	1,557
387.00	1,585	1,429	2,986

Device	Routing	Invert	Outlet Devices
#1	Primary	384.50'	<b>12.0" Round 12" RCP</b> L= 10.0' CMP, projecting, no headwall, Ke= 0.900 Inlet / Outlet Invert= 384.50' / 384.00' S= 0.0500 '/' Cc= 0.900 n= 0.011 Concrete pipe, straight & clean, Flow Area= 0.79 sf

**Primary OutFlow** Max=2.83 cfs @ 0.30 hrs HW=385.90' (Free Discharge)  
 ↑ **1=12" RCP** (Inlet Controls 2.83 cfs @ 3.61 fps)

# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022  
Page 50


## Pond 3P: DETENTION POND

Hydrograph

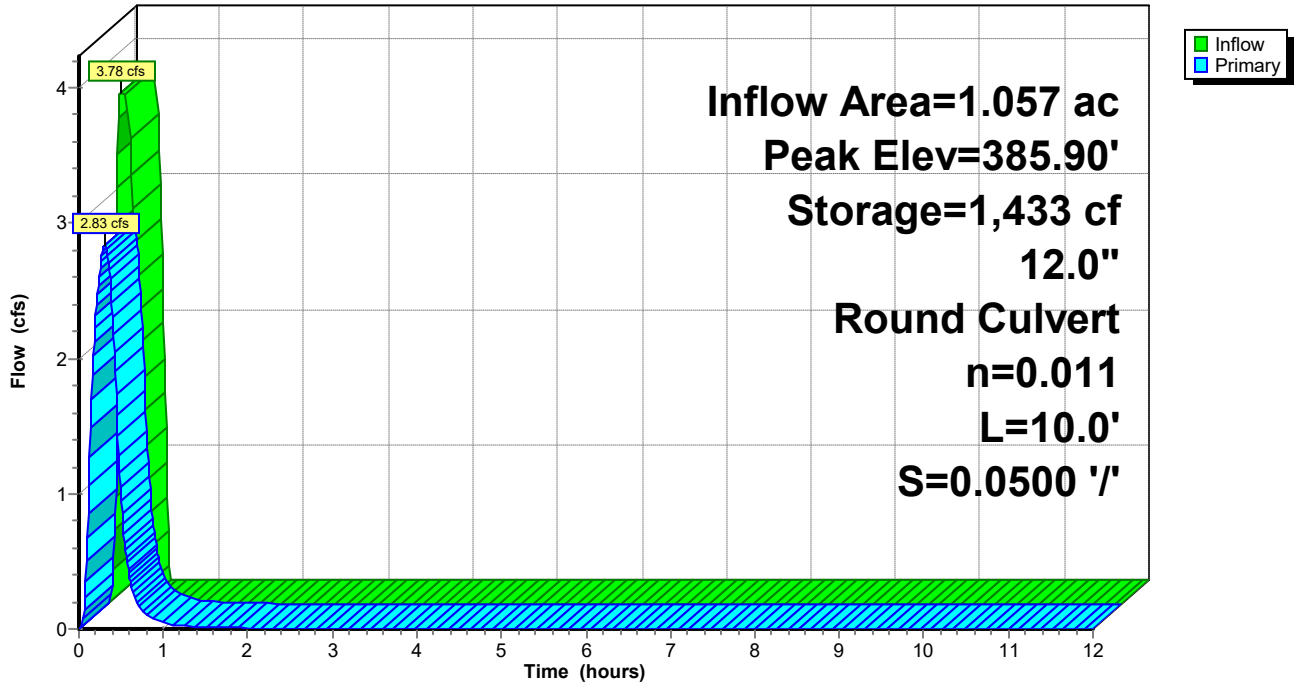

## Pond 3P: DETENTION POND

Stage-Discharge

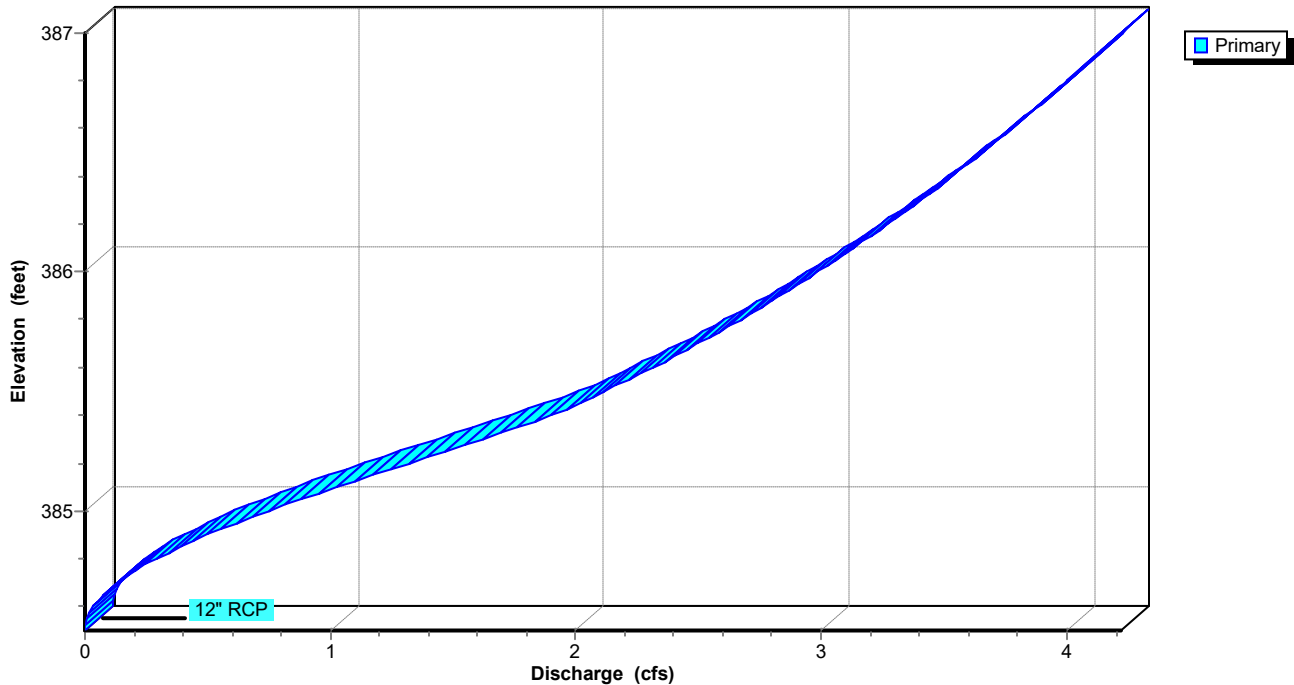

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 51

## Pond 3P: DETENTION POND

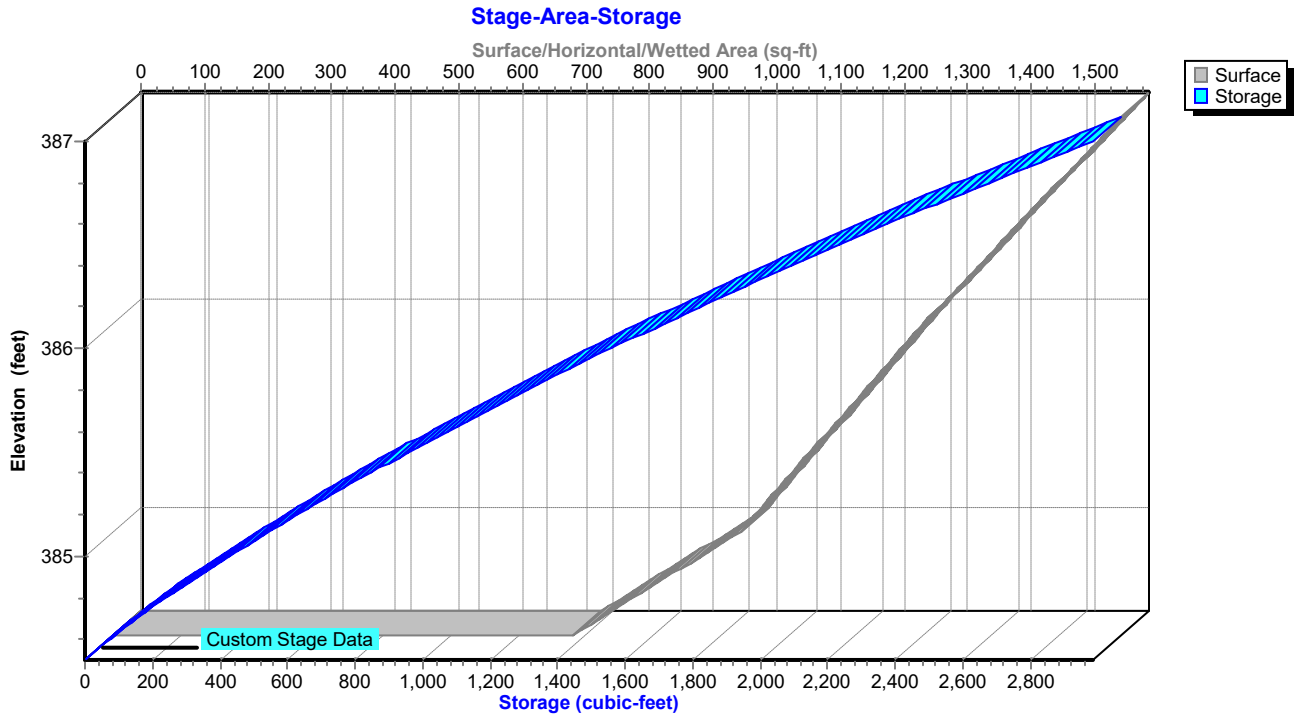

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr*

Printed 5/11/2022

Page 52

**Hydrograph for Pond 3P: DETENTION POND**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>384.50</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>499</b>	<b>385.07</b>	<b>0.94</b>
1.00	0.00	85	384.61	0.04
1.50	0.00	43	384.56	0.01
2.00	0.00	28	384.54	0.01
2.50	0.00	21	384.53	0.00
3.00	0.00	16	384.52	0.00
3.50	0.00	13	384.52	0.00
4.00	0.00	11	384.51	0.00
4.50	0.00	8	384.51	0.00
5.00	0.00	7	384.51	0.00
5.50	0.00	5	384.51	0.00
6.00	0.00	4	384.51	0.00
6.50	0.00	4	384.50	0.00
7.00	0.00	3	384.50	0.00
7.50	0.00	2	384.50	0.00
8.00	0.00	2	384.50	0.00
8.50	0.00	1	384.50	0.00
9.00	0.00	1	384.50	0.00
9.50	0.00	1	384.50	0.00
10.00	0.00	1	384.50	0.00
10.50	0.00	1	384.50	0.00
11.00	0.00	0	384.50	0.00
11.50	0.00	0	384.50	0.00
12.00	0.00	0	384.50	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr

Printed 5/11/2022

Page 53

## Stage-Discharge for Pond 3P: DETENTION POND

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
384.50	0.00	385.52	2.15	386.54	3.70
384.52	0.00	385.54	2.19	386.56	3.73
384.54	0.01	385.56	2.23	386.58	3.75
384.56	0.01	385.58	2.27	386.60	3.78
384.58	0.02	385.60	2.31	386.62	3.80
384.60	0.03	385.62	2.35	386.64	3.82
384.62	0.05	385.64	2.39	386.66	3.85
384.64	0.07	385.66	2.43	386.68	3.87
384.66	0.09	385.68	2.46	386.70	3.89
384.68	0.11	385.70	2.50	386.72	3.92
384.70	0.13	385.72	2.53	386.74	3.94
384.72	0.16	385.74	2.57	386.76	3.96
384.74	0.19	385.76	2.60	386.78	3.98
384.76	0.22	385.78	2.64	386.80	4.01
384.78	0.26	385.80	2.67	386.82	4.03
384.80	0.29	385.82	2.70	386.84	4.05
384.82	0.33	385.84	2.74	386.86	4.07
384.84	0.37	385.86	2.77	386.88	4.09
384.86	0.41	385.88	2.80	386.90	4.12
384.88	0.45	385.90	2.83	386.92	4.14
384.90	0.50	385.92	2.86	386.94	4.16
384.92	0.55	385.94	2.89	386.96	4.18
384.94	0.59	385.96	2.93	386.98	4.20
384.96	0.64	385.98	2.96	387.00	<b>4.22</b>
384.98	0.69	386.00	2.99		
385.00	0.75	386.02	3.02		
385.02	0.80	386.04	3.04		
385.04	0.85	386.06	3.07		
385.06	0.91	386.08	3.10		
385.08	0.97	386.10	3.13		
385.10	1.02	386.12	3.16		
385.12	1.08	386.14	3.19		
385.14	1.14	386.16	3.22		
385.16	1.20	386.18	3.24		
385.18	1.26	386.20	3.27		
385.20	1.32	386.22	3.30		
385.22	1.38	386.24	3.32		
385.24	1.44	386.26	3.35		
385.26	1.50	386.28	3.38		
385.28	1.56	386.30	3.40		
385.30	1.62	386.32	3.43		
385.32	1.68	386.34	3.46		
385.34	1.74	386.36	3.48		
385.36	1.79	386.38	3.51		
385.38	1.85	386.40	3.53		
385.40	1.90	386.42	3.56		
385.42	1.95	386.44	3.58		
385.44	2.00	386.46	3.61		
385.46	2.04	386.48	3.63		
385.48	2.08	386.50	3.66		
385.50	2.11	386.52	3.68		

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 10-yr Duration=16 min, Inten=4.60 in/hr*

Printed 5/11/2022

Page 54

**Stage-Area-Storage for Pond 3P: DETENTION POND**

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
384.50	724	0
384.55	750	37
384.60	776	75
384.65	803	114
384.70	829	155
384.75	855	197
384.80	881	241
384.85	907	285
384.90	934	332
384.95	960	379
385.00	986	428
385.05	1,000	477
385.10	1,015	528
385.15	1,029	579
385.20	1,043	630
385.25	1,058	683
385.30	1,072	736
385.35	1,086	790
385.40	1,101	845
385.45	1,115	900
385.50	1,130	956
385.55	1,144	1,013
385.60	1,158	1,071
385.65	1,173	1,129
385.70	1,187	1,188
385.75	1,201	1,248
385.80	1,216	1,308
385.85	1,230	1,369
385.90	1,244	1,431
385.95	1,259	1,494
386.00	1,273	1,557
386.05	1,289	1,621
386.10	1,304	1,686
386.15	1,320	1,751
386.20	1,335	1,818
386.25	1,351	1,885
386.30	1,367	1,953
386.35	1,382	2,022
386.40	1,398	2,091
386.45	1,413	2,161
386.50	1,429	2,233
386.55	1,445	2,304
386.60	1,460	2,377
386.65	1,476	2,450
386.70	1,491	2,525
386.75	1,507	2,600
386.80	1,523	2,675
386.85	1,538	2,752
386.90	1,554	2,829
386.95	1,569	2,907
387.00	<b>1,585</b>	<b>2,986</b>



**Splash Carwash Bryant**

Splash Car Wash Bryant, Arkansas  
*Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr*

Prepared by Phillip Lewis Engineering

Printed 5/11/2022

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Page 55

Time span=0.00-12.00 hrs, dt=0.01 hrs, 1201 points

Runoff by Rational method, Rise/Fall=1.0/1.0 xTc

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

**Subcatchment 1S: PRE-DEVELOPMENT** Runoff Area=46,055 sf 0.00% Impervious Runoff Depth=0.97"  
Flow Length=270' Slope=0.0250 '/' Tc=15.5 min C=0.69 Runoff=3.90 cfs 0.086 af

**Subcatchment 2S: POST-DEVELOPMENT** Runoff Area=46,055 sf 63.15% Impervious Runoff Depth=1.09"  
Flow Length=360' Slope=0.0150 '/' Tc=8.8 min C=0.77 Runoff=4.35 cfs 0.096 af

**Reach 4R: CURB CUT WIER** Avg. Flow Depth=0.25' Max Vel=5.80 fps Inflow=4.35 cfs 0.096 af  
n=0.013 L=4.0' S=0.0200 '/' Capacity=12.61 cfs Outflow=4.36 cfs 0.096 af

**Pond 3P: DETENTION POND** Peak Elev=386.11' Storage=1,698 cf Inflow=4.36 cfs 0.096 af  
12.0" Round Culvert n=0.011 L=10.0' S=0.0500 '/' Outflow=3.14 cfs 0.096 af

**Total Runoff Area = 2.115 ac Runoff Volume = 0.182 af Average Runoff Depth = 1.03"**  
**68.43% Pervious = 1.447 ac 31.57% Impervious = 0.668 ac**

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 56

## Summary for Subcatchment 1S: PRE-DEVELOPMENT

Runoff = 3.90 cfs @ 0.26 hrs, Volume= 0.086 af, Depth= 0.97"


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Area (sf)	C	Description
31,035	0.65	GRAVEL PARKING
15,020	0.77	SHRUB POOR CONDITION BRUSH
46,055	0.69	Weighted Average
46,055		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
15.5	270	0.0250	0.29		Sheet Flow, SHEET FLOW SURFACE Range n= 0.130 P2= 4.19"

## Subcatchment 1S: PRE-DEVELOPMENT

Hydrograph

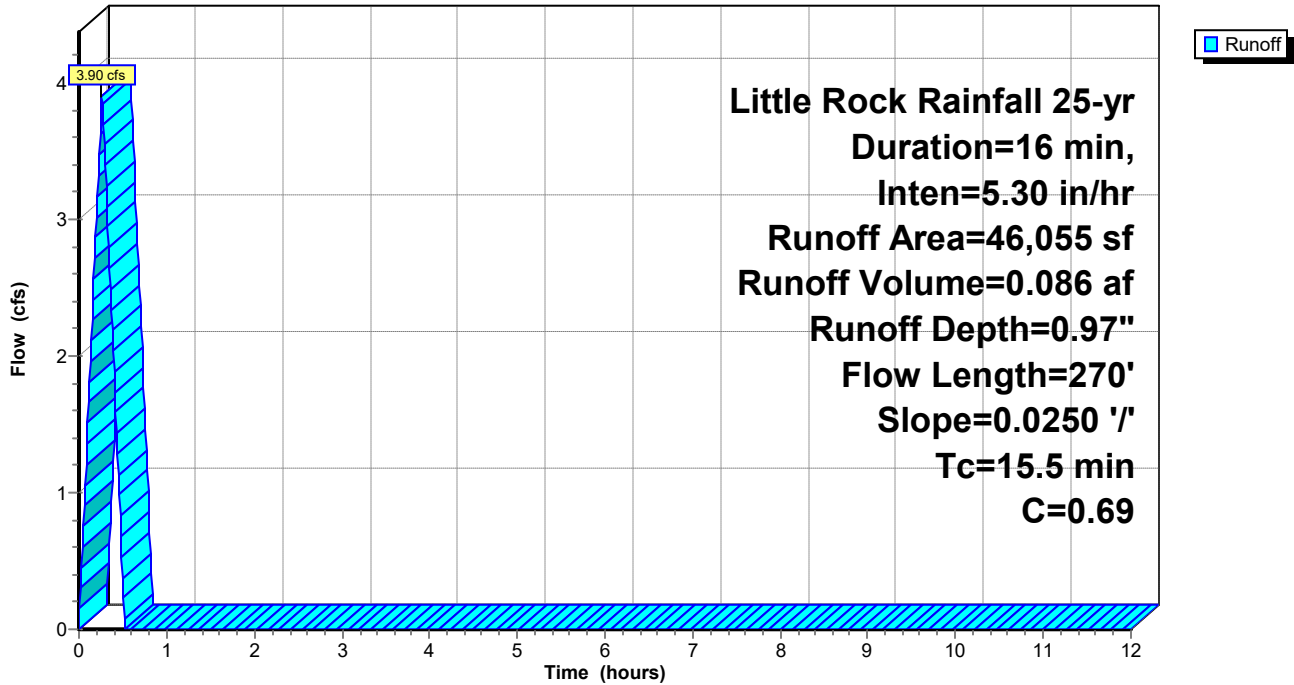

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 57

## Hydrograph for Subcatchment 1S: PRE-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	1.51	5.20	0.00	10.30	0.00
0.20	<b>3.02</b>	5.30	0.00	10.40	0.00
0.30	<b>3.39</b>	5.40	0.00	10.50	0.00
0.40	1.89	5.50	0.00	10.60	0.00
0.50	0.38	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 58

## Summary for Subcatchment 2S: POST-DEVELOPMENT

Runoff = 4.35 cfs @ 0.15 hrs, Volume= 0.096 af, Depth= 1.09"  
 Routed to Reach 4R : CURB CUT WIER


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Area (sf)	C	Description
22,479	0.95	ASPHALT SURFACE
6,603	0.97	ROOF TOP
16,973	0.46	GRASS LANDSCAPING
46,055	0.77	Weighted Average
16,973		36.85% Pervious Area
29,082		63.15% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	40	0.0150	0.10		<b>Sheet Flow, GRASS</b> Grass: Dense n= 0.240 P2= 4.19"
2.1	320	0.0150	2.49		<b>Shallow Concentrated Flow, PAVEMENT</b> Paved Kv= 20.3 fps
8.8	360	Total			

## Subcatchment 2S: POST-DEVELOPMENT

Hydrograph

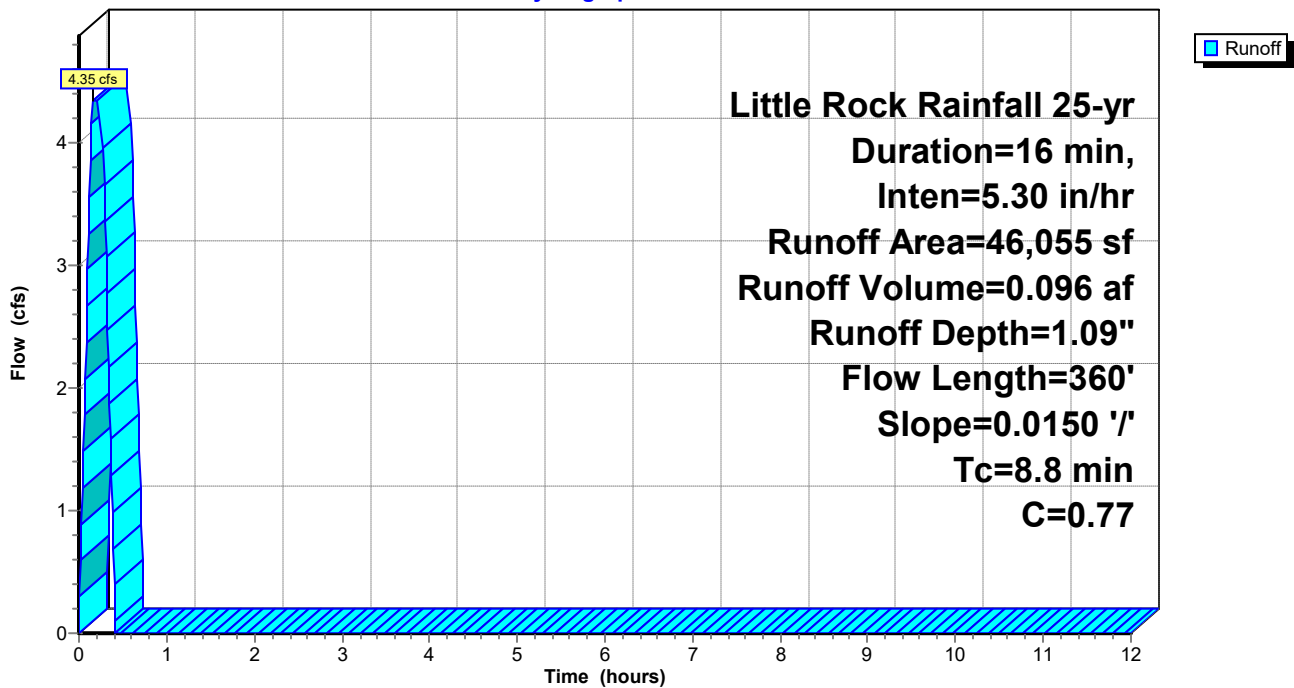

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 59

## Hydrograph for Subcatchment 2S: POST-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	<b>2.97</b>	5.20	0.00	10.30	0.00
0.20	<b>4.35</b>	5.30	0.00	10.40	0.00
0.30	3.36	5.40	0.00	10.50	0.00
0.40	0.40	5.50	0.00	10.60	0.00
0.50	0.00	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

**Splash Carwash Bryant**

Splash Car Wash Bryant, Arkansas  
*Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr*

Prepared by Phillip Lewis Engineering

Printed 5/11/2022

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Page 60

**Summary for Reach 4R: CURB CUT WIER**

[88] Warning: Qout>Qin may require smaller dt or Finer Routing

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 1.09" for 25-yr event  
Inflow = 4.35 cfs @ 0.15 hrs, Volume= 0.096 af  
Outflow = 4.36 cfs @ 0.16 hrs, Volume= 0.096 af, Atten= 0%, Lag= 0.6 min  
Routed to Pond 3P : DETENTION POND

Routing by Stor-Ind+Trans method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Max. Velocity= 5.80 fps, Min. Travel Time= 0.0 min  
Avg. Velocity = 4.60 fps, Avg. Travel Time= 0.0 min

Peak Storage= 3 cf @ 0.16 hrs  
Average Depth at Peak Storage= 0.25' , Surface Width= 3.00'  
Bank-Full Depth= 0.50' Flow Area= 1.5 sf, Capacity= 12.61 cfs

3.00' x 0.50' deep channel, n= 0.013 Concrete, trowel finish  
Length= 4.0' Slope= 0.0200 '/'  
Inlet Invert= 387.25', Outlet Invert= 387.17'



# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022  
Page 61


## Reach 4R: CURB CUT WIER

Hydrograph

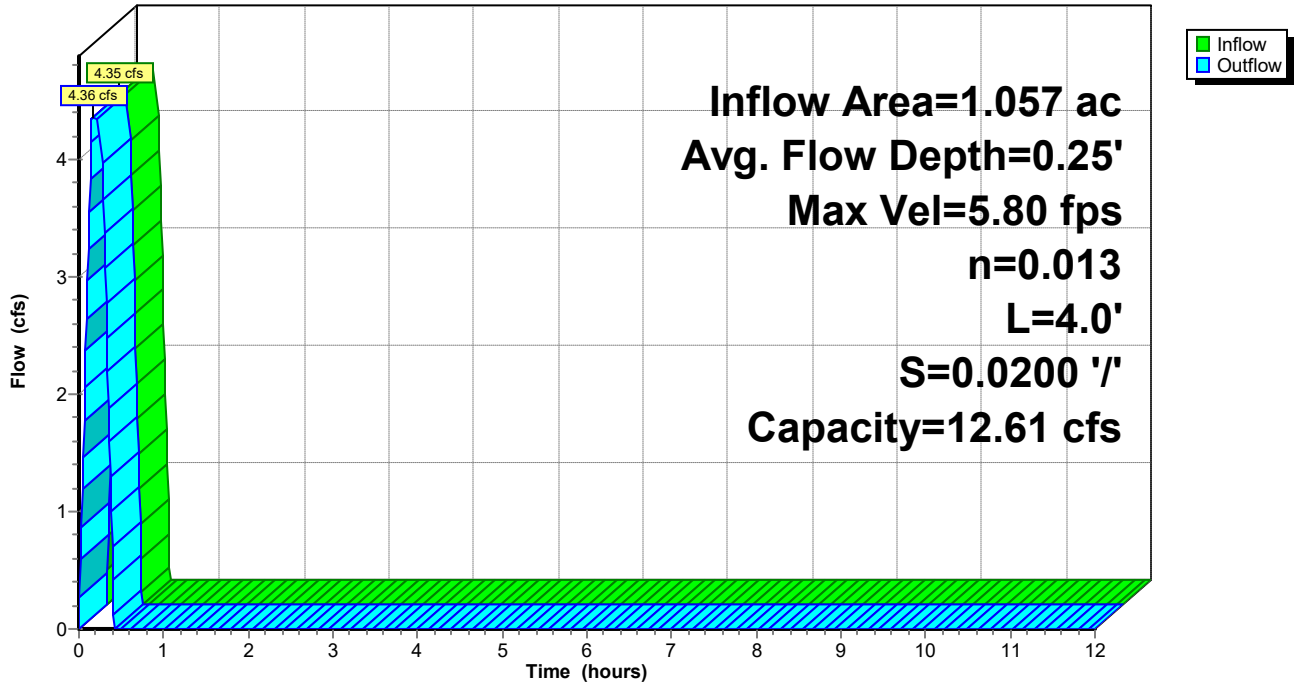

## Reach 4R: CURB CUT WIER

Stage-Discharge

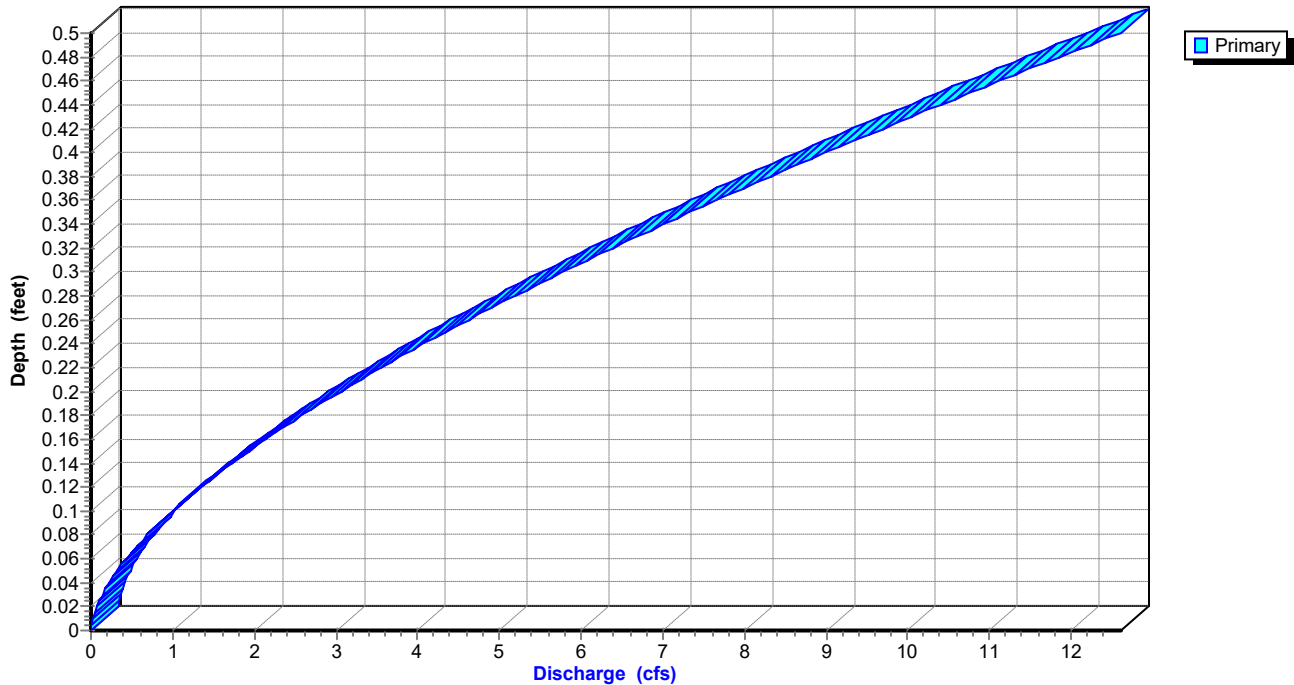


# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022  
Page 62

## Reach 4R: CURB CUT WIER

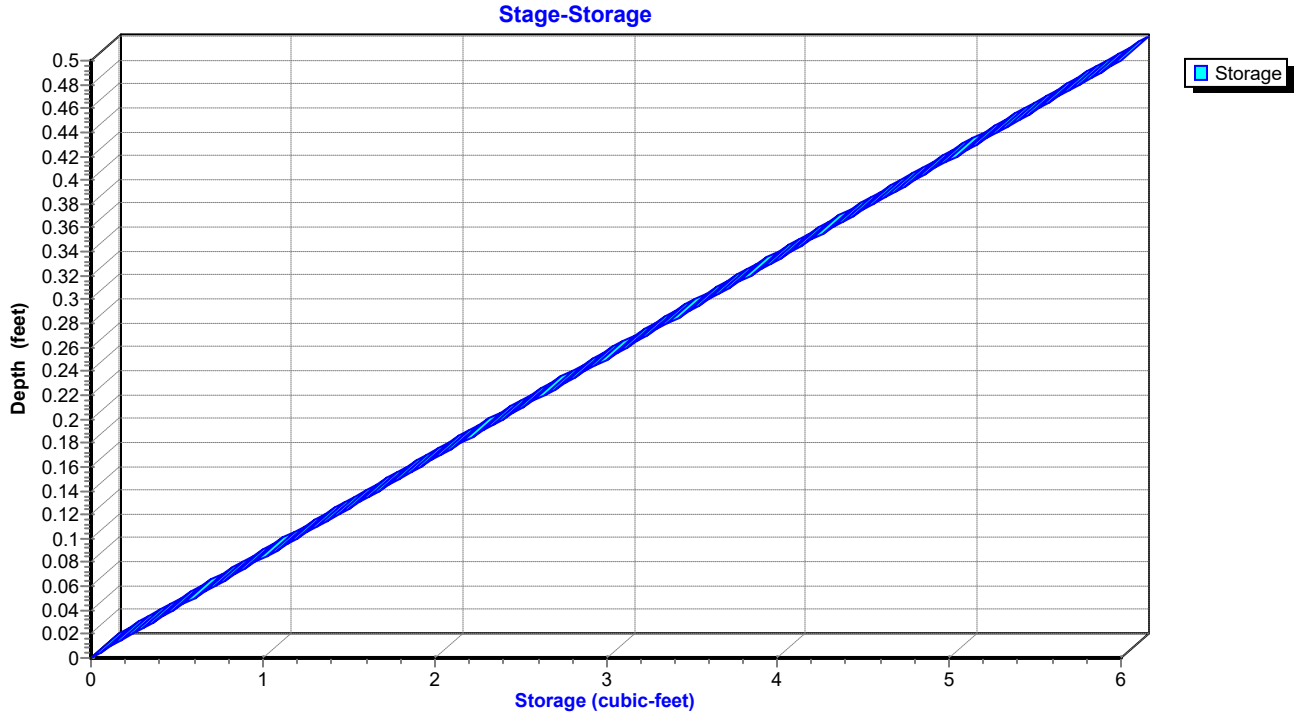



**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr*

Printed 5/11/2022

Page 63

**Hydrograph for Reach 4R: CURB CUT WIER**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Outflow (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
1.00	0.00	0	387.25	0.00
1.50	0.00	0	387.25	0.00
2.00	0.00	0	387.25	0.00
2.50	0.00	0	387.25	0.00
3.00	0.00	0	387.25	0.00
3.50	0.00	0	387.25	0.00
4.00	0.00	0	387.25	0.00
4.50	0.00	0	387.25	0.00
5.00	0.00	0	387.25	0.00
5.50	0.00	0	387.25	0.00
6.00	0.00	0	387.25	0.00
6.50	0.00	0	387.25	0.00
7.00	0.00	0	387.25	0.00
7.50	0.00	0	387.25	0.00
8.00	0.00	0	387.25	0.00
8.50	0.00	0	387.25	0.00
9.00	0.00	0	387.25	0.00
9.50	0.00	0	387.25	0.00
10.00	0.00	0	387.25	0.00
10.50	0.00	0	387.25	0.00
11.00	0.00	0	387.25	0.00
11.50	0.00	0	387.25	0.00
12.00	0.00	0	387.25	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 64

## Stage-Discharge for Reach 4R: CURB CUT WIER

Elevation (feet)	Velocity (ft/sec)	Discharge (cfs)
387.25	0.00	0.00
387.26	0.75	0.02
387.27	1.18	0.07
387.28	1.54	0.14
387.29	1.86	0.22
387.30	2.15	0.32
387.31	2.41	0.43
387.32	2.66	0.56
387.33	2.90	0.70
387.34	3.12	0.84
387.35	3.34	1.00
387.36	3.54	1.17
387.37	3.74	1.35
387.38	3.92	1.53
387.39	4.11	1.72
387.40	4.28	1.93
387.41	4.45	2.14
387.42	4.62	2.36
387.43	4.78	2.58
387.44	4.93	2.81
387.45	5.09	3.05
387.46	5.23	3.30
387.47	5.38	3.55
387.48	5.52	3.81
387.49	5.65	4.07
387.50	5.79	4.34
387.51	5.92	4.62
387.52	6.05	4.90
387.53	6.17	5.19
387.54	6.30	5.48
387.55	6.42	5.77
387.56	6.53	6.08
387.57	6.65	6.38
387.58	6.76	6.69
387.59	6.87	7.01
387.60	6.98	7.33
387.61	7.09	7.65
387.62	7.19	7.98
387.63	7.30	8.32
387.64	7.40	8.65
387.65	7.50	9.00
387.66	7.59	9.34
387.67	7.69	9.69
387.68	7.79	10.04
387.69	7.88	10.40
387.70	7.97	10.76
387.71	8.06	11.12
387.72	8.15	11.49
387.73	8.24	11.86
387.74	8.32	12.23
387.75	<b>8.41</b>	<b>12.61</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 65

## Stage-Area-Storage for Reach 4R: CURB CUT WIER

Elevation (feet)	End-Area (sq-ft)	Storage (cubic-feet)
387.25	0.0	0
387.26	0.0	0
387.27	0.1	0
387.28	0.1	0
387.29	0.1	0
387.30	0.2	1
387.31	0.2	1
387.32	0.2	1
387.33	0.2	1
387.34	0.3	1
387.35	0.3	1
387.36	0.3	1
387.37	0.4	1
387.38	0.4	2
387.39	0.4	2
387.40	0.4	2
387.41	0.5	2
387.42	0.5	2
387.43	0.5	2
387.44	0.6	2
387.45	0.6	2
387.46	0.6	3
387.47	0.7	3
387.48	0.7	3
387.49	0.7	3
387.50	0.8	3
387.51	0.8	3
387.52	0.8	3
387.53	0.8	3
387.54	0.9	3
387.55	0.9	4
387.56	0.9	4
387.57	1.0	4
387.58	1.0	4
387.59	1.0	4
387.60	1.1	4
387.61	1.1	4
387.62	1.1	4
387.63	1.1	5
387.64	1.2	5
387.65	1.2	5
387.66	1.2	5
387.67	1.3	5
387.68	1.3	5
387.69	1.3	5
387.70	1.4	5
387.71	1.4	6
387.72	1.4	6
387.73	1.4	6
387.74	1.5	6
387.75	<b>1.5</b>	<b>6</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 66

## Summary for Pond 3P: DETENTION POND

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 1.09" for 25-yr event  
 Inflow = 4.36 cfs @ 0.16 hrs, Volume= 0.096 af  
 Outflow = 3.14 cfs @ 0.31 hrs, Volume= 0.096 af, Atten= 28%, Lag= 8.9 min  
 Primary = 3.14 cfs @ 0.31 hrs, Volume= 0.096 af

Routing by Stor-Ind method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Peak Elev= 386.11' @ 0.31 hrs Surf.Area= 1,307 sf Storage= 1,698 cf

Plug-Flow detention time= 9.9 min calculated for 0.096 af (100% of inflow)  
 Center-of-Mass det. time= 10.2 min ( 22.7 - 12.4 )

Volume	Invert	Avail.Storage	Storage Description
#1	384.50'	2,986 cf	<b>Custom Stage Data (Prismatic)</b> Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
384.50	724	0	0
385.00	986	428	428
386.00	1,273	1,130	1,557
387.00	1,585	1,429	2,986

Device	Routing	Invert	Outlet Devices
#1	Primary	384.50'	<b>12.0" Round 12" RCP</b> L= 10.0' CMP, projecting, no headwall, Ke= 0.900 Inlet / Outlet Invert= 384.50' / 384.00' S= 0.0500 '/' Cc= 0.900 n= 0.011 Concrete pipe, straight & clean, Flow Area= 0.79 sf

**Primary OutFlow** Max=3.14 cfs @ 0.31 hrs HW=386.11' (Free Discharge)

↑ **1=12" RCP** (Inlet Controls 3.14 cfs @ 4.00 fps)

# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022  
Page 67


## Pond 3P: DETENTION POND

Hydrograph

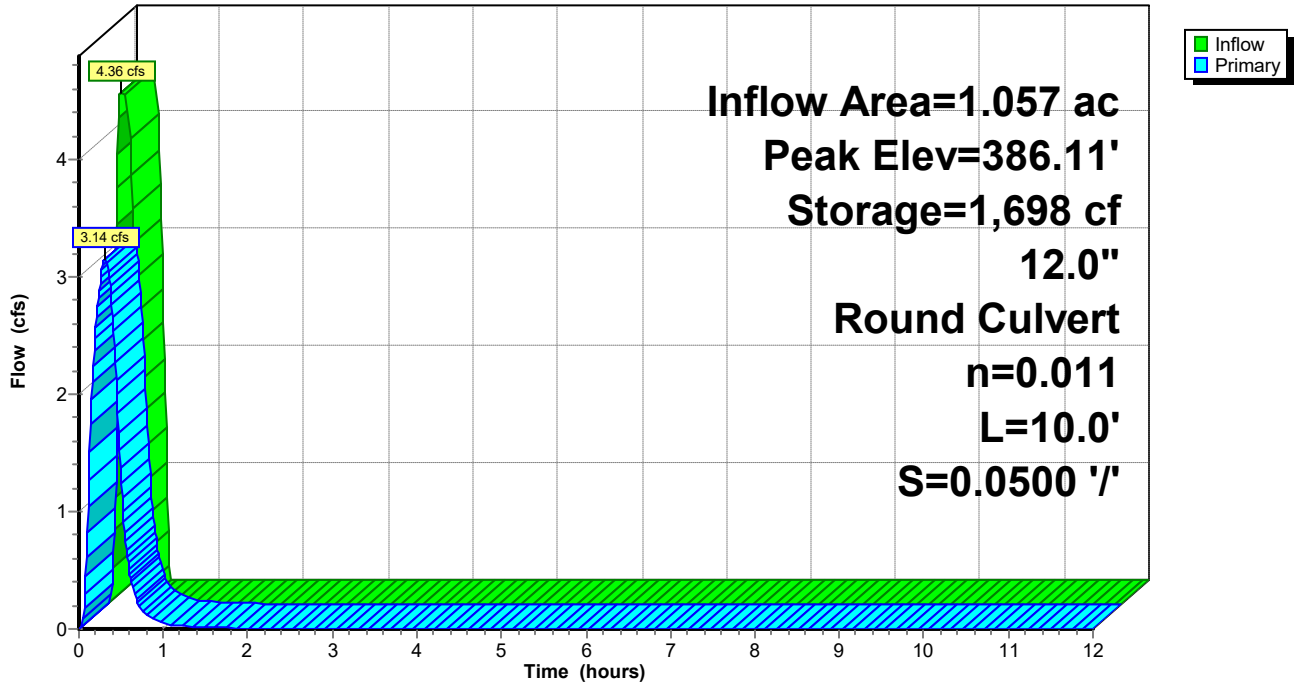

## Pond 3P: DETENTION POND

Stage-Discharge

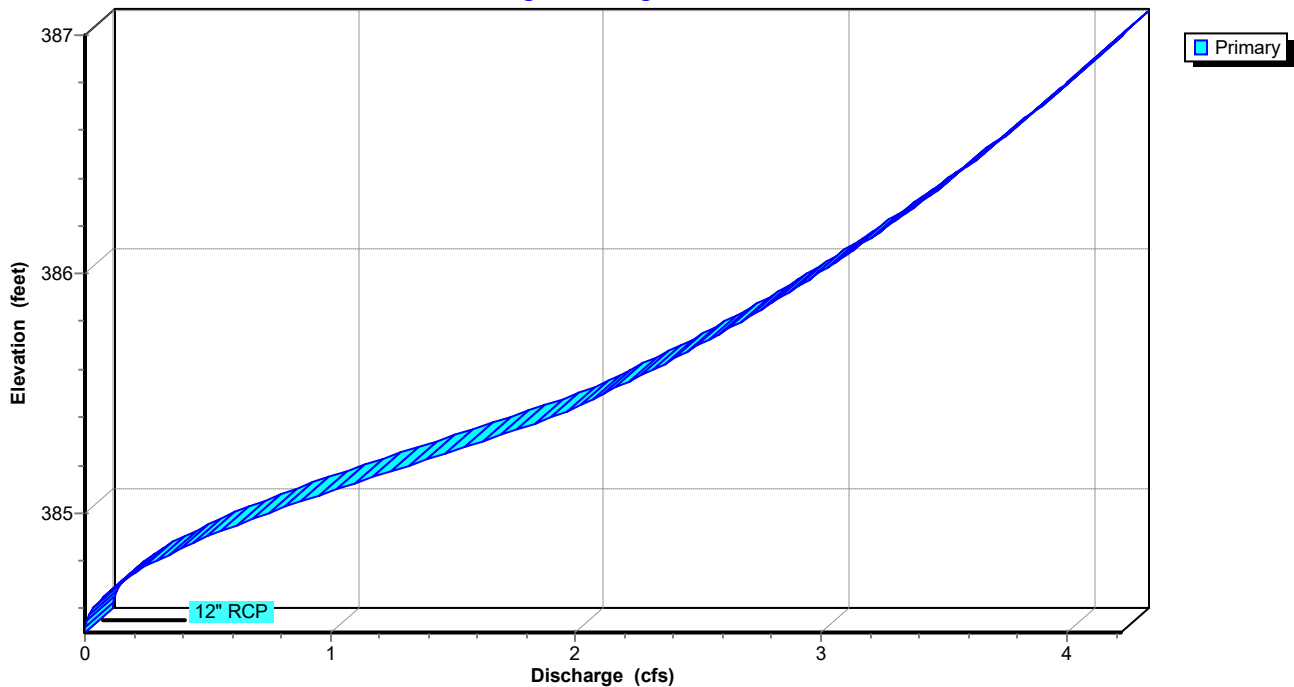


# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022  
Page 68

## Pond 3P: DETENTION POND

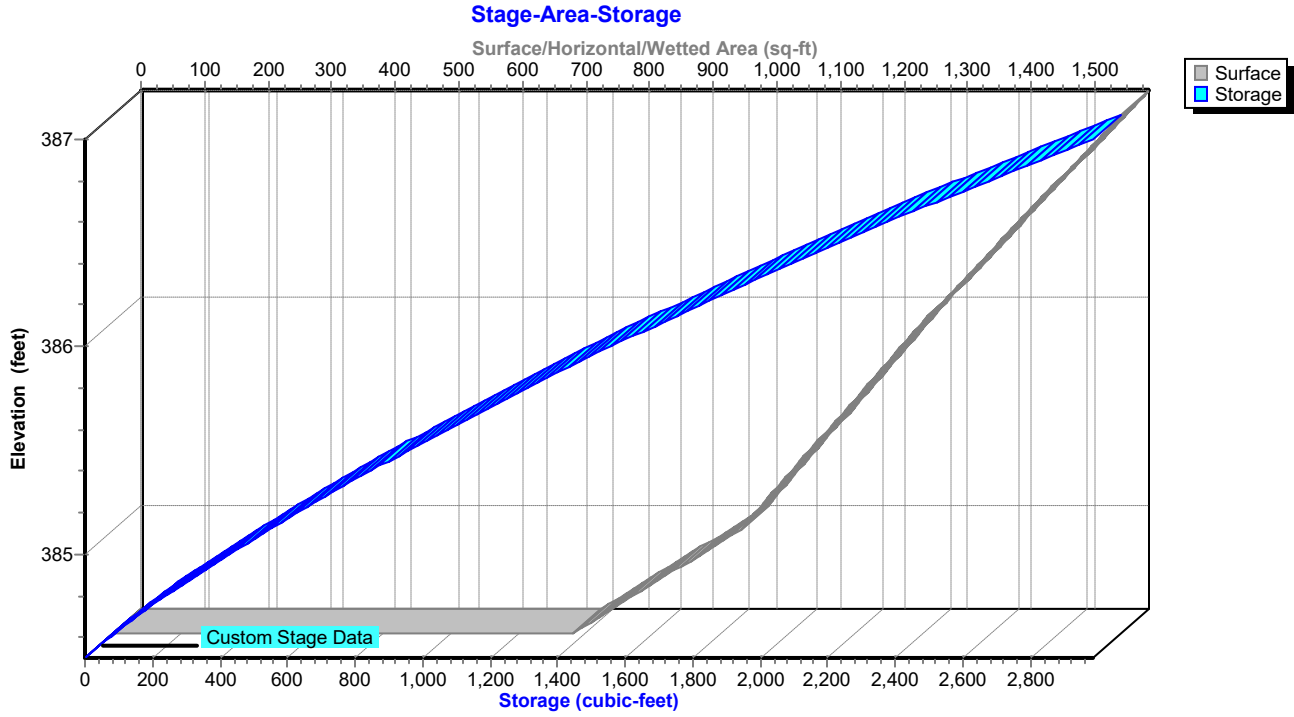

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr*

Printed 5/11/2022

Page 69

**Hydrograph for Pond 3P: DETENTION POND**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>384.50</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>600</b>	<b>385.17</b>	<b>1.23</b>
1.00	0.00	90	384.62	0.05
1.50	0.00	44	384.56	0.01
2.00	0.00	29	384.54	0.01
2.50	0.00	21	384.53	0.00
3.00	0.00	16	384.52	0.00
3.50	0.00	13	384.52	0.00
4.00	0.00	11	384.51	0.00
4.50	0.00	9	384.51	0.00
5.00	0.00	7	384.51	0.00
5.50	0.00	6	384.51	0.00
6.00	0.00	4	384.51	0.00
6.50	0.00	4	384.50	0.00
7.00	0.00	3	384.50	0.00
7.50	0.00	2	384.50	0.00
8.00	0.00	2	384.50	0.00
8.50	0.00	1	384.50	0.00
9.00	0.00	1	384.50	0.00
9.50	0.00	1	384.50	0.00
10.00	0.00	1	384.50	0.00
10.50	0.00	1	384.50	0.00
11.00	0.00	0	384.50	0.00
11.50	0.00	0	384.50	0.00
12.00	0.00	0	384.50	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 70

## Stage-Discharge for Pond 3P: DETENTION POND

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
384.50	0.00	385.52	2.15	386.54	3.70
384.52	0.00	385.54	2.19	386.56	3.73
384.54	0.01	385.56	2.23	386.58	3.75
384.56	0.01	385.58	2.27	386.60	3.78
384.58	0.02	385.60	2.31	386.62	3.80
384.60	0.03	385.62	2.35	386.64	3.82
384.62	0.05	385.64	2.39	386.66	3.85
384.64	0.07	385.66	2.43	386.68	3.87
384.66	0.09	385.68	2.46	386.70	3.89
384.68	0.11	385.70	2.50	386.72	3.92
384.70	0.13	385.72	2.53	386.74	3.94
384.72	0.16	385.74	2.57	386.76	3.96
384.74	0.19	385.76	2.60	386.78	3.98
384.76	0.22	385.78	2.64	386.80	4.01
384.78	0.26	385.80	2.67	386.82	4.03
384.80	0.29	385.82	2.70	386.84	4.05
384.82	0.33	385.84	2.74	386.86	4.07
384.84	0.37	385.86	2.77	386.88	4.09
384.86	0.41	385.88	2.80	386.90	4.12
384.88	0.45	385.90	2.83	386.92	4.14
384.90	0.50	385.92	2.86	386.94	4.16
384.92	0.55	385.94	2.89	386.96	4.18
384.94	0.59	385.96	2.93	386.98	4.20
384.96	0.64	385.98	2.96	387.00	<b>4.22</b>
384.98	0.69	386.00	2.99		
385.00	0.75	386.02	3.02		
385.02	0.80	386.04	3.04		
385.04	0.85	386.06	3.07		
385.06	0.91	386.08	3.10		
385.08	0.97	386.10	3.13		
385.10	1.02	386.12	3.16		
385.12	1.08	386.14	3.19		
385.14	1.14	386.16	3.22		
385.16	1.20	386.18	3.24		
385.18	1.26	386.20	3.27		
385.20	1.32	386.22	3.30		
385.22	1.38	386.24	3.32		
385.24	1.44	386.26	3.35		
385.26	1.50	386.28	3.38		
385.28	1.56	386.30	3.40		
385.30	1.62	386.32	3.43		
385.32	1.68	386.34	3.46		
385.34	1.74	386.36	3.48		
385.36	1.79	386.38	3.51		
385.38	1.85	386.40	3.53		
385.40	1.90	386.42	3.56		
385.42	1.95	386.44	3.58		
385.44	2.00	386.46	3.61		
385.46	2.04	386.48	3.63		
385.48	2.08	386.50	3.66		
385.50	2.11	386.52	3.68		



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 25-yr Duration=16 min, Inten=5.30 in/hr

Printed 5/11/2022

Page 71

## Stage-Area-Storage for Pond 3P: DETENTION POND

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
384.50	724	0
384.55	750	37
384.60	776	75
384.65	803	114
384.70	829	155
384.75	855	197
384.80	881	241
384.85	907	285
384.90	934	332
384.95	960	379
385.00	986	428
385.05	1,000	477
385.10	1,015	528
385.15	1,029	579
385.20	1,043	630
385.25	1,058	683
385.30	1,072	736
385.35	1,086	790
385.40	1,101	845
385.45	1,115	900
385.50	1,130	956
385.55	1,144	1,013
385.60	1,158	1,071
385.65	1,173	1,129
385.70	1,187	1,188
385.75	1,201	1,248
385.80	1,216	1,308
385.85	1,230	1,369
385.90	1,244	1,431
385.95	1,259	1,494
386.00	1,273	1,557
386.05	1,289	1,621
386.10	1,304	1,686
386.15	1,320	1,751
386.20	1,335	1,818
386.25	1,351	1,885
386.30	1,367	1,953
386.35	1,382	2,022
386.40	1,398	2,091
386.45	1,413	2,161
386.50	1,429	2,233
386.55	1,445	2,304
386.60	1,460	2,377
386.65	1,476	2,450
386.70	1,491	2,525
386.75	1,507	2,600
386.80	1,523	2,675
386.85	1,538	2,752
386.90	1,554	2,829
386.95	1,569	2,907
387.00	<b>1,585</b>	<b>2,986</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 72

Time span=0.00-12.00 hrs, dt=0.01 hrs, 1201 points

Runoff by Rational method, Rise/Fall=1.0/1.0 xTc

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

**Subcatchment 1S: PRE-DEVELOPMENT** Runoff Area=46,055 sf 0.00% Impervious Runoff Depth=1.07"  
Flow Length=270' Slope=0.0250 '/' Tc=15.5 min C=0.69 Runoff=4.30 cfs 0.095 af

**Subcatchment 2S: POST-DEVELOPMENT** Runoff Area=46,055 sf 63.15% Impervious Runoff Depth=1.20"  
Flow Length=360' Slope=0.0150 '/' Tc=8.8 min C=0.77 Runoff=4.79 cfs 0.106 af

**Reach 4R: CURB CUT WIER** Avg. Flow Depth=0.27' Max Vel=6.00 fps Inflow=4.79 cfs 0.106 af  
n=0.013 L=4.0' S=0.0200 '/' Capacity=12.61 cfs Outflow=4.80 cfs 0.106 af

**Pond 3P: DETENTION POND** Peak Elev=386.27' Storage=1,914 cf Inflow=4.80 cfs 0.106 af  
12.0" Round Culvert n=0.011 L=10.0' S=0.0500 '/' Outflow=3.37 cfs 0.106 af

**Total Runoff Area = 2.115 ac Runoff Volume = 0.200 af Average Runoff Depth = 1.14"**  
**68.43% Pervious = 1.447 ac 31.57% Impervious = 0.668 ac**

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 73

## Summary for Subcatchment 1S: PRE-DEVELOPMENT

Runoff = 4.30 cfs @ 0.26 hrs, Volume= 0.095 af, Depth= 1.07"


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Area (sf)	C	Description
31,035	0.65	GRAVEL PARKING
15,020	0.77	SHRUB POOR CONDITION BRUSH
46,055	0.69	Weighted Average
46,055		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
15.5	270	0.0250	0.29		<b>Sheet Flow, SHEET FLOW SURFACE</b> Range n= 0.130 P2= 4.19"

## Subcatchment 1S: PRE-DEVELOPMENT

Hydrograph

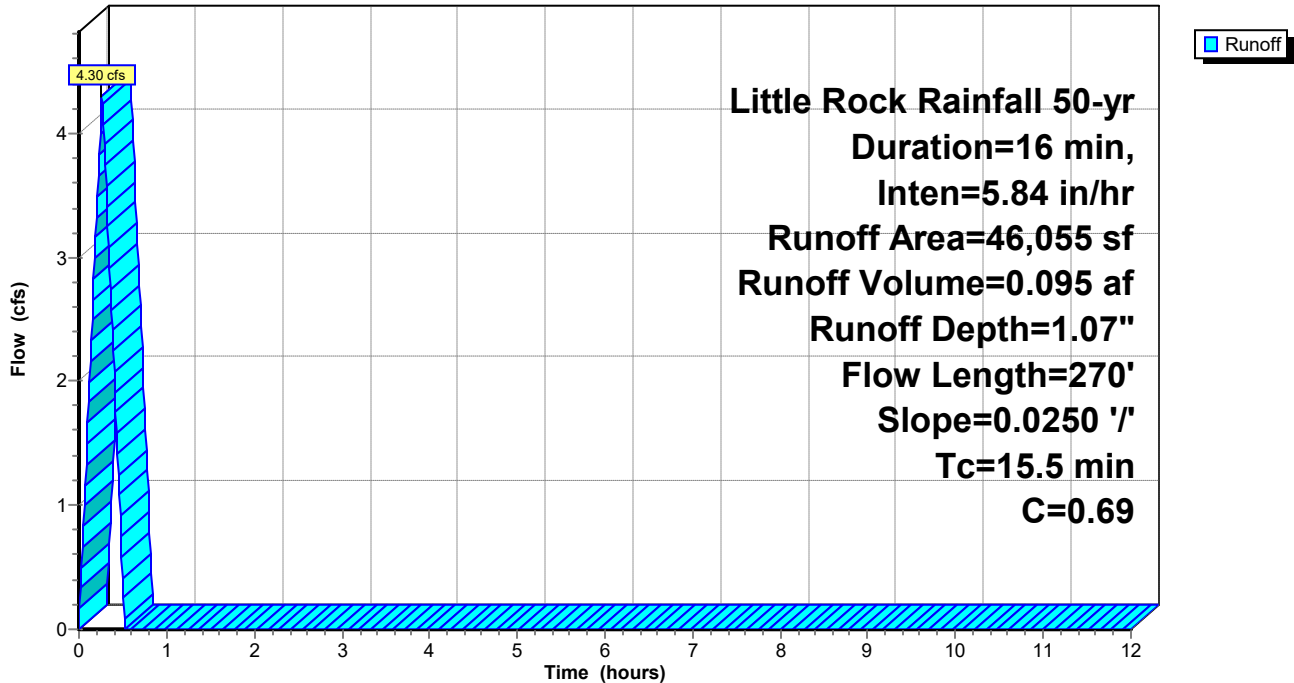

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 74

## Hydrograph for Subcatchment 1S: PRE-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	1.66	5.20	0.00	10.30	0.00
0.20	<b>3.33</b>	5.30	0.00	10.40	0.00
0.30	<b>3.74</b>	5.40	0.00	10.50	0.00
0.40	2.08	5.50	0.00	10.60	0.00
0.50	0.42	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 75

## Summary for Subcatchment 2S: POST-DEVELOPMENT

Runoff = 4.79 cfs @ 0.15 hrs, Volume= 0.106 af, Depth= 1.20"  
 Routed to Reach 4R : CURB CUT WIER


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Area (sf)	C	Description
22,479	0.95	ASPHALT SURFACE
6,603	0.97	ROOF TOP
16,973	0.46	GRASS LANDSCAPING
46,055	0.77	Weighted Average
16,973		36.85% Pervious Area
29,082		63.15% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	40	0.0150	0.10		<b>Sheet Flow, GRASS</b> Grass: Dense n= 0.240 P2= 4.19"
2.1	320	0.0150	2.49		<b>Shallow Concentrated Flow, PAVEMENT</b> Paved Kv= 20.3 fps
8.8	360	Total			

## Subcatchment 2S: POST-DEVELOPMENT

Hydrograph

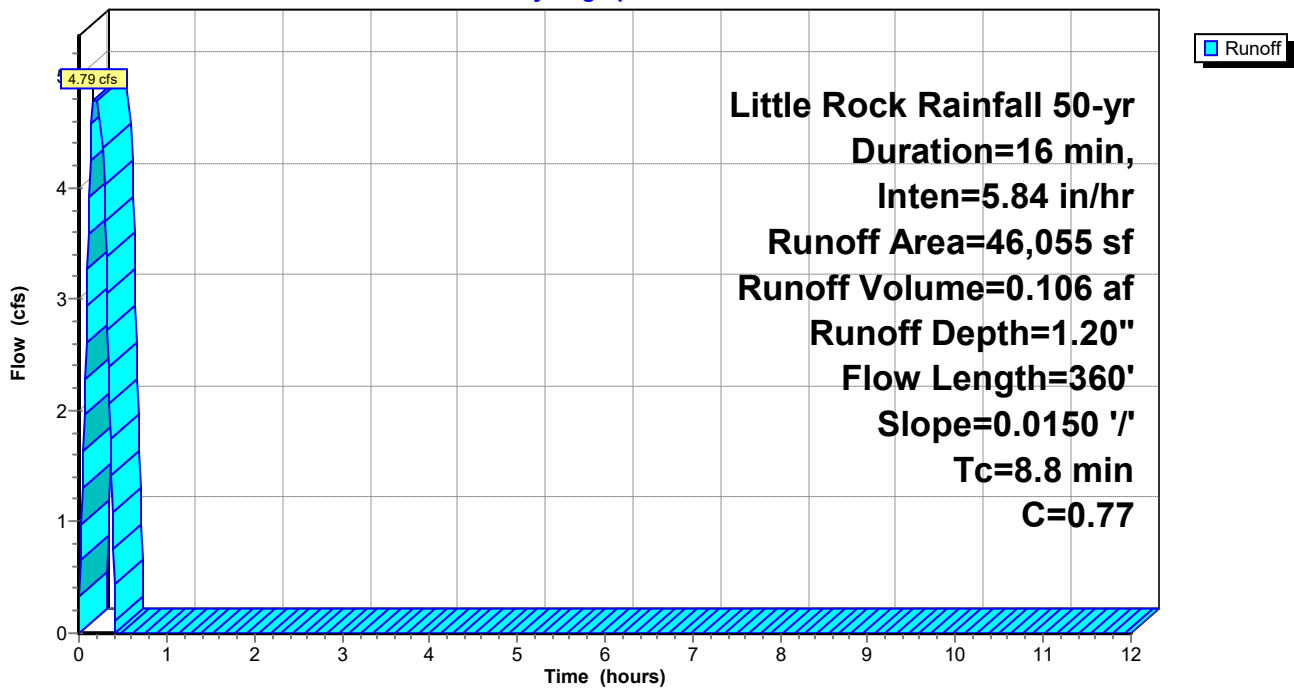

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 76

**Hydrograph for Subcatchment 2S: POST-DEVELOPMENT**

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	<b>3.27</b>	5.20	0.00	10.30	0.00
0.20	<b>4.79</b>	5.30	0.00	10.40	0.00
0.30	3.70	5.40	0.00	10.50	0.00
0.40	0.44	5.50	0.00	10.60	0.00
0.50	0.00	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

**Splash Carwash Bryant**

Splash Car Wash Bryant, Arkansas  
*Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr*

Prepared by Phillip Lewis Engineering

Printed 5/11/2022

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Page 77

**Summary for Reach 4R: CURB CUT WIER**

[88] Warning: Qout>Qin may require smaller dt or Finer Routing

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 1.20" for 50-yr event  
Inflow = 4.79 cfs @ 0.15 hrs, Volume= 0.106 af  
Outflow = 4.80 cfs @ 0.16 hrs, Volume= 0.106 af, Atten= 0%, Lag= 0.6 min  
Routed to Pond 3P : DETENTION POND

Routing by Stor-Ind+Trans method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Max. Velocity= 6.00 fps, Min. Travel Time= 0.0 min  
Avg. Velocity = 4.77 fps, Avg. Travel Time= 0.0 min

Peak Storage= 3 cf @ 0.16 hrs  
Average Depth at Peak Storage= 0.27' , Surface Width= 3.00'  
Bank-Full Depth= 0.50' Flow Area= 1.5 sf, Capacity= 12.61 cfs

3.00' x 0.50' deep channel, n= 0.013 Concrete, trowel finish  
Length= 4.0' Slope= 0.0200 '/'  
Inlet Invert= 387.25', Outlet Invert= 387.17'



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas


Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 78


## Reach 4R: CURB CUT WIER

Hydrograph

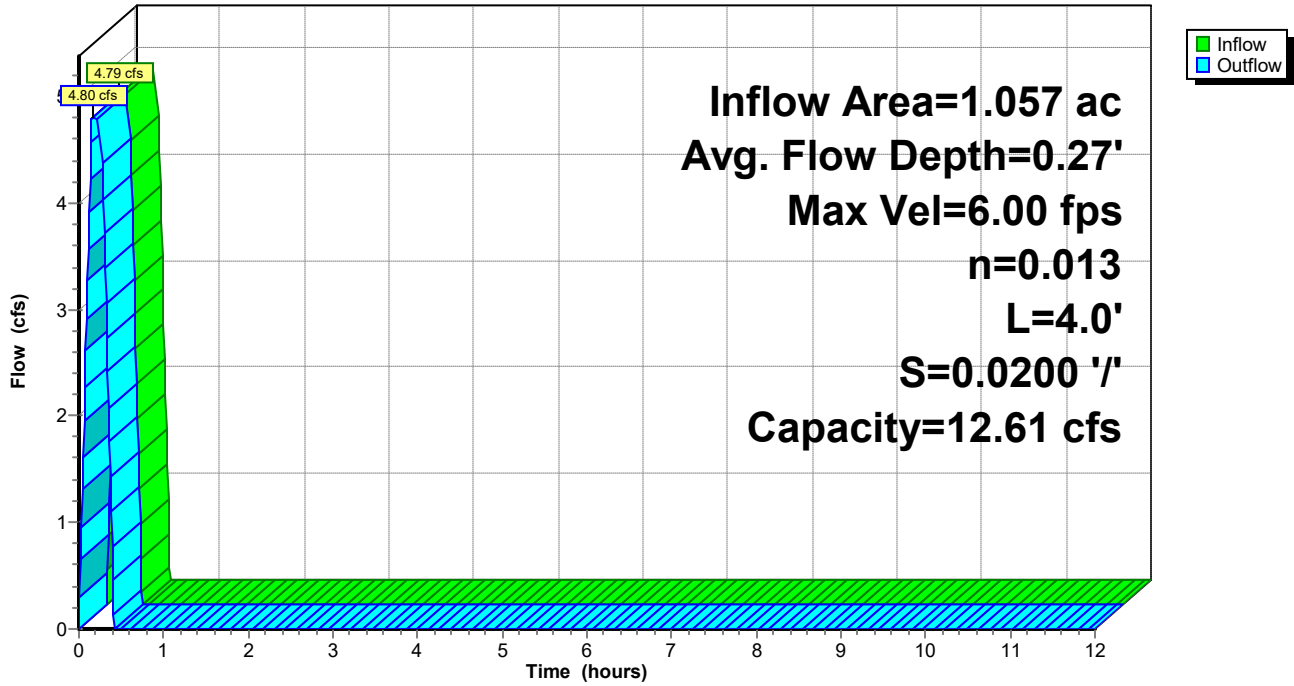

## Reach 4R: CURB CUT WIER

Stage-Discharge

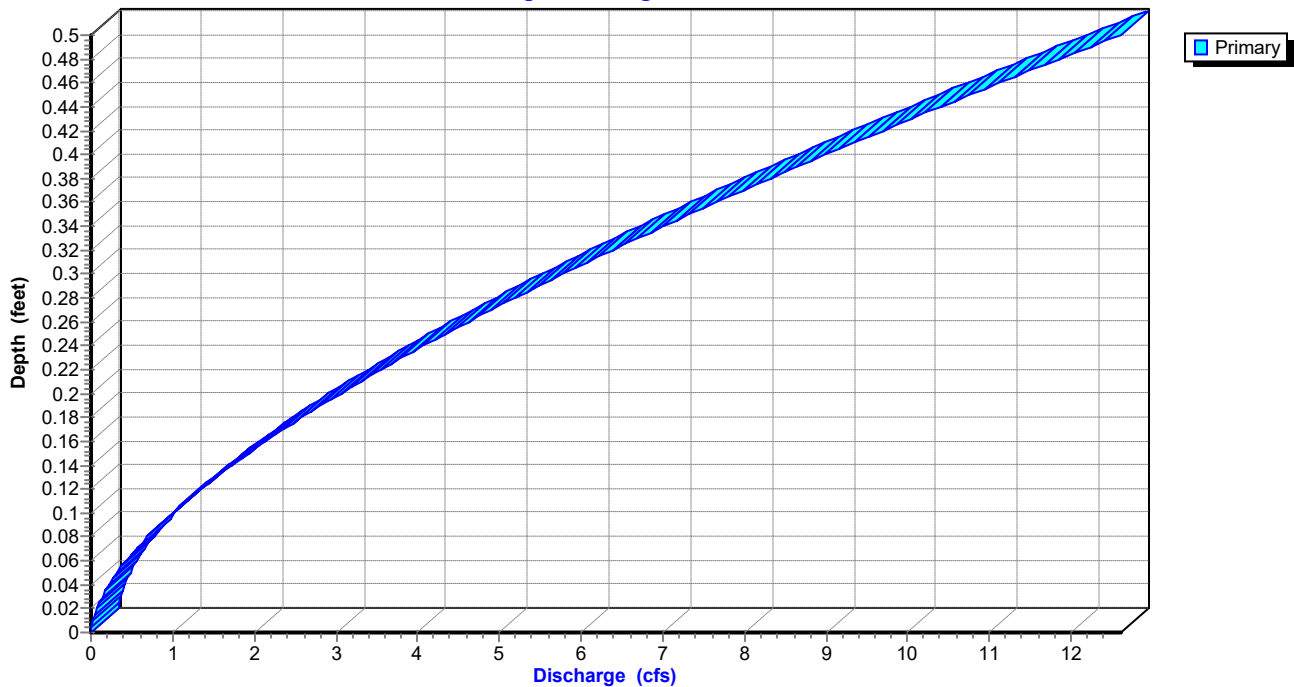




# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022  
Page 79

## Reach 4R: CURB CUT WIER

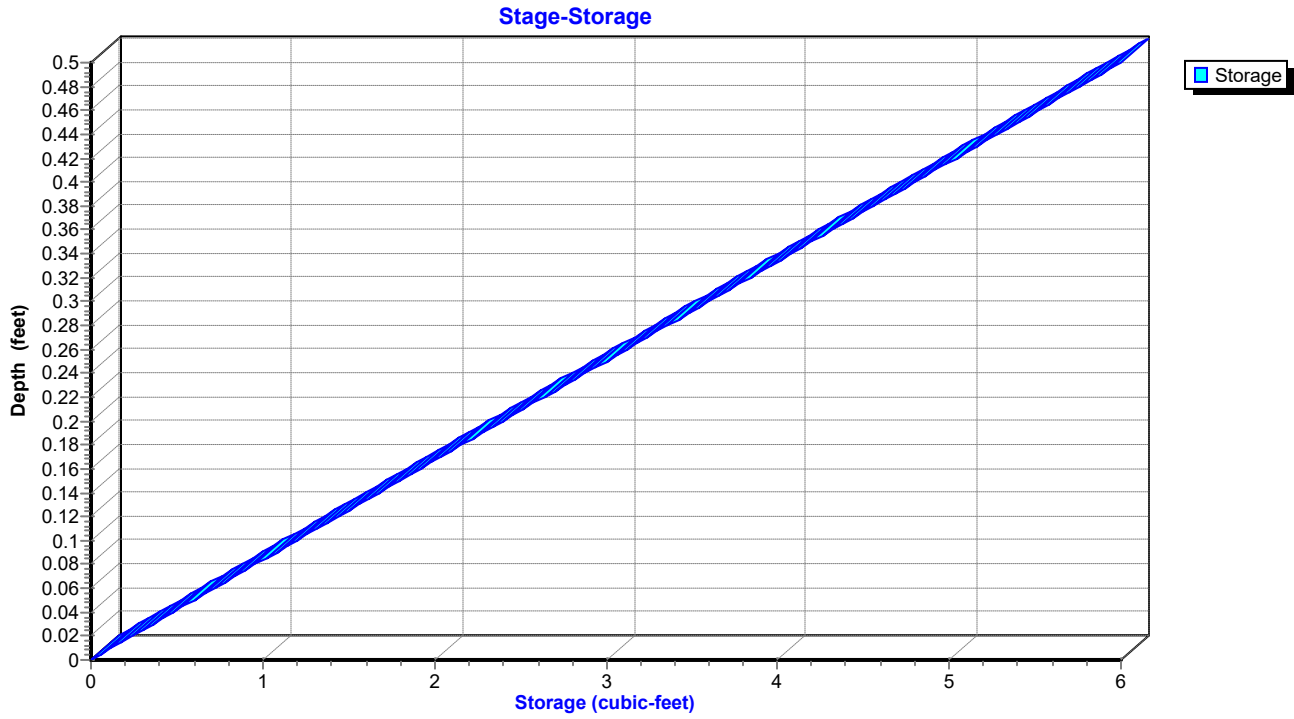

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr*

Printed 5/11/2022

Page 80

**Hydrograph for Reach 4R: CURB CUT WIER**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Outflow (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
1.00	0.00	0	387.25	0.00
1.50	0.00	0	387.25	0.00
2.00	0.00	0	387.25	0.00
2.50	0.00	0	387.25	0.00
3.00	0.00	0	387.25	0.00
3.50	0.00	0	387.25	0.00
4.00	0.00	0	387.25	0.00
4.50	0.00	0	387.25	0.00
5.00	0.00	0	387.25	0.00
5.50	0.00	0	387.25	0.00
6.00	0.00	0	387.25	0.00
6.50	0.00	0	387.25	0.00
7.00	0.00	0	387.25	0.00
7.50	0.00	0	387.25	0.00
8.00	0.00	0	387.25	0.00
8.50	0.00	0	387.25	0.00
9.00	0.00	0	387.25	0.00
9.50	0.00	0	387.25	0.00
10.00	0.00	0	387.25	0.00
10.50	0.00	0	387.25	0.00
11.00	0.00	0	387.25	0.00
11.50	0.00	0	387.25	0.00
12.00	0.00	0	387.25	0.00

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 81

## Stage-Discharge for Reach 4R: CURB CUT WIER

Elevation (feet)	Velocity (ft/sec)	Discharge (cfs)
387.25	0.00	0.00
387.26	0.75	0.02
387.27	1.18	0.07
387.28	1.54	0.14
387.29	1.86	0.22
387.30	2.15	0.32
387.31	2.41	0.43
387.32	2.66	0.56
387.33	2.90	0.70
387.34	3.12	0.84
387.35	3.34	1.00
387.36	3.54	1.17
387.37	3.74	1.35
387.38	3.92	1.53
387.39	4.11	1.72
387.40	4.28	1.93
387.41	4.45	2.14
387.42	4.62	2.36
387.43	4.78	2.58
387.44	4.93	2.81
387.45	5.09	3.05
387.46	5.23	3.30
387.47	5.38	3.55
387.48	5.52	3.81
387.49	5.65	4.07
387.50	5.79	4.34
387.51	5.92	4.62
387.52	6.05	4.90
387.53	6.17	5.19
387.54	6.30	5.48
387.55	6.42	5.77
387.56	6.53	6.08
387.57	6.65	6.38
387.58	6.76	6.69
387.59	6.87	7.01
387.60	6.98	7.33
387.61	7.09	7.65
387.62	7.19	7.98
387.63	7.30	8.32
387.64	7.40	8.65
387.65	7.50	9.00
387.66	7.59	9.34
387.67	7.69	9.69
387.68	7.79	10.04
387.69	7.88	10.40
387.70	7.97	10.76
387.71	8.06	11.12
387.72	8.15	11.49
387.73	8.24	11.86
387.74	8.32	12.23
387.75	<b>8.41</b>	<b>12.61</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 82

## Stage-Area-Storage for Reach 4R: CURB CUT WIER

Elevation (feet)	End-Area (sq-ft)	Storage (cubic-feet)
387.25	0.0	0
387.26	0.0	0
387.27	0.1	0
387.28	0.1	0
387.29	0.1	0
387.30	0.2	1
387.31	0.2	1
387.32	0.2	1
387.33	0.2	1
387.34	0.3	1
387.35	0.3	1
387.36	0.3	1
387.37	0.4	1
387.38	0.4	2
387.39	0.4	2
387.40	0.4	2
387.41	0.5	2
387.42	0.5	2
387.43	0.5	2
387.44	0.6	2
387.45	0.6	2
387.46	0.6	3
387.47	0.7	3
387.48	0.7	3
387.49	0.7	3
387.50	0.8	3
387.51	0.8	3
387.52	0.8	3
387.53	0.8	3
387.54	0.9	3
387.55	0.9	4
387.56	0.9	4
387.57	1.0	4
387.58	1.0	4
387.59	1.0	4
387.60	1.1	4
387.61	1.1	4
387.62	1.1	4
387.63	1.1	5
387.64	1.2	5
387.65	1.2	5
387.66	1.2	5
387.67	1.3	5
387.68	1.3	5
387.69	1.3	5
387.70	1.4	5
387.71	1.4	6
387.72	1.4	6
387.73	1.4	6
387.74	1.5	6
387.75	<b>1.5</b>	<b>6</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 83

## Summary for Pond 3P: DETENTION POND

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 1.20" for 50-yr event  
 Inflow = 4.80 cfs @ 0.16 hrs, Volume= 0.106 af  
 Outflow = 3.37 cfs @ 0.31 hrs, Volume= 0.106 af, Atten= 30%, Lag= 9.0 min  
 Primary = 3.37 cfs @ 0.31 hrs, Volume= 0.106 af

Routing by Stor-Ind method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Peak Elev= 386.27' @ 0.31 hrs Surf.Area= 1,358 sf Storage= 1,914 cf

Plug-Flow detention time= 9.9 min calculated for 0.106 af (100% of inflow)  
 Center-of-Mass det. time= 10.3 min ( 22.7 - 12.4 )

Volume	Invert	Avail.Storage	Storage Description
#1	384.50'	2,986 cf	<b>Custom Stage Data (Prismatic)</b> Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
384.50	724	0	0
385.00	986	428	428
386.00	1,273	1,130	1,557
387.00	1,585	1,429	2,986

Device	Routing	Invert	Outlet Devices
#1	Primary	384.50'	<b>12.0" Round 12" RCP</b> L= 10.0' CMP, projecting, no headwall, Ke= 0.900 Inlet / Outlet Invert= 384.50' / 384.00' S= 0.0500 '/' Cc= 0.900 n= 0.011 Concrete pipe, straight & clean, Flow Area= 0.79 sf

**Primary OutFlow** Max=3.37 cfs @ 0.31 hrs HW=386.27' (Free Discharge)  
 ↑1=12" RCP (Inlet Controls 3.37 cfs @ 4.29 fps)

# Splash Carwash Bryant


Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022  
Page 84


## Pond 3P: DETENTION POND

Hydrograph

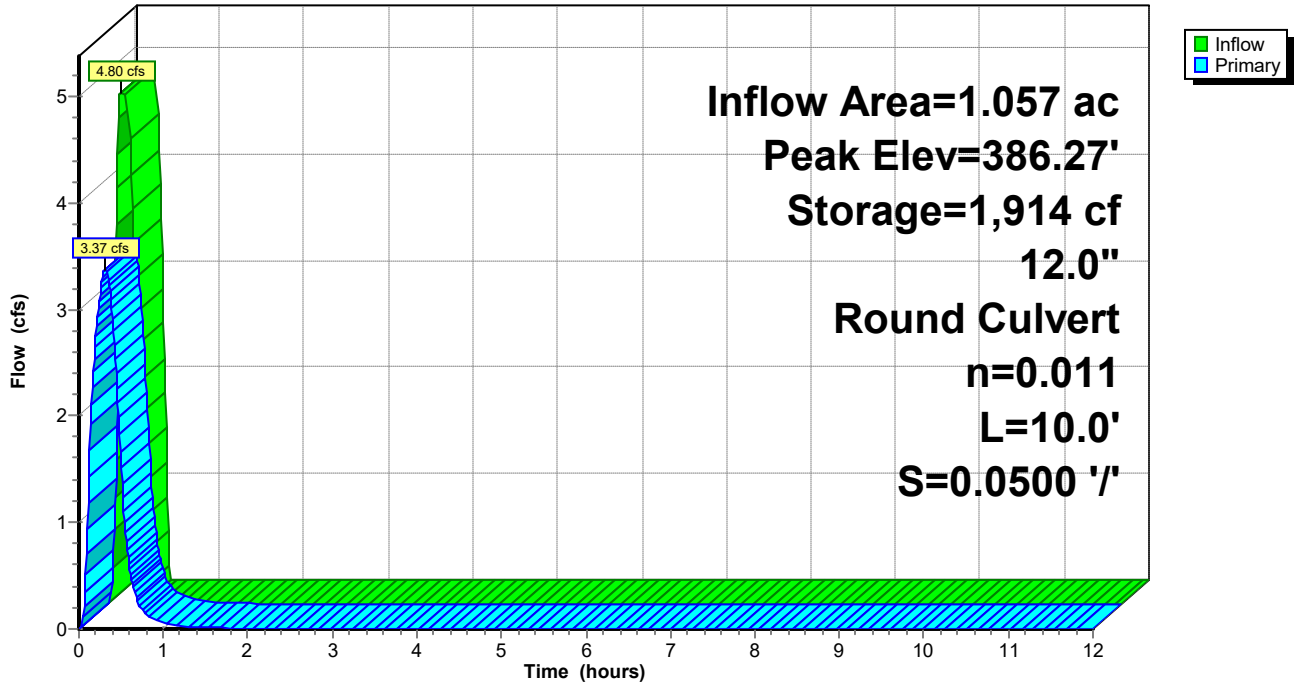

## Pond 3P: DETENTION POND

Stage-Discharge

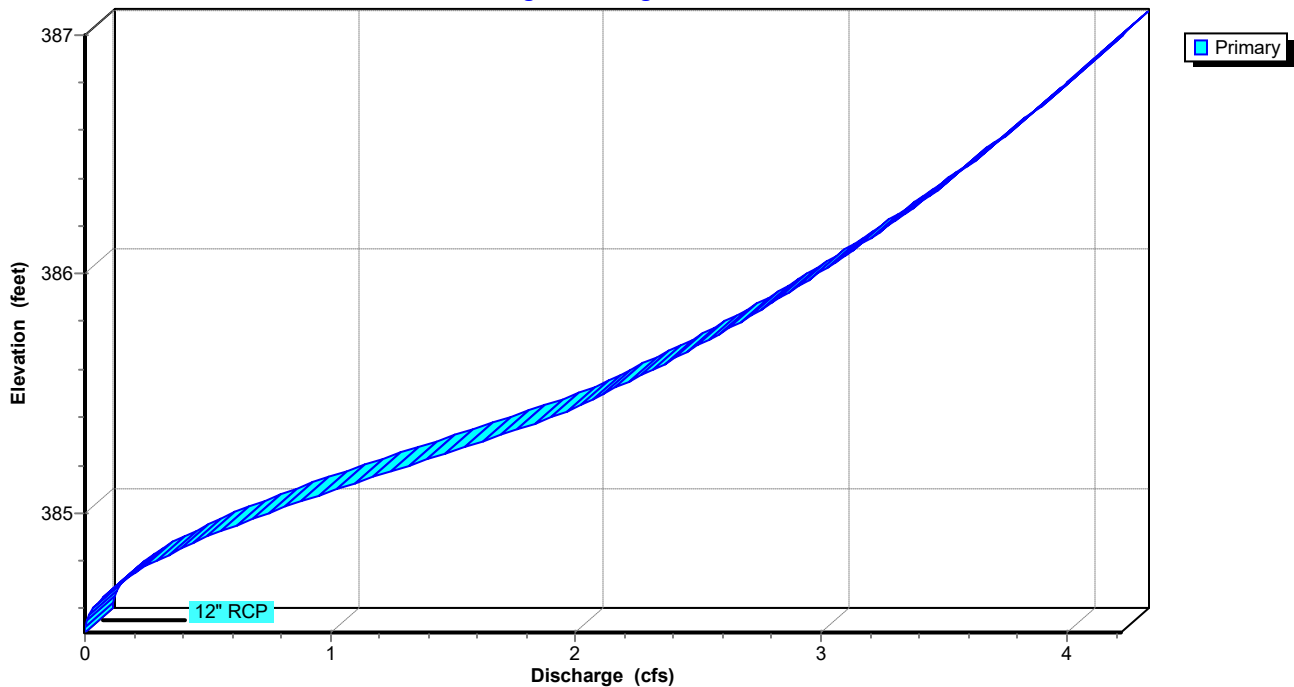

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 85

## Pond 3P: DETENTION POND

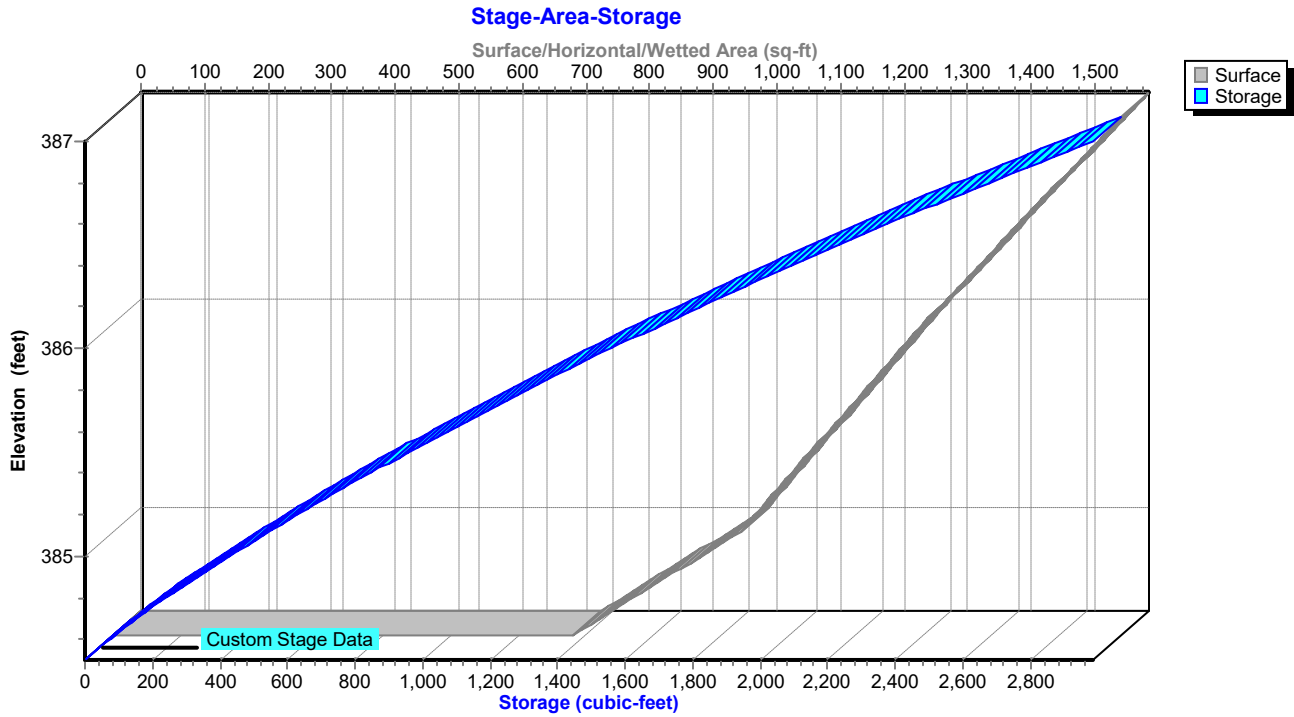

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr*

Printed 5/11/2022

Page 86

**Hydrograph for Pond 3P: DETENTION POND**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>384.50</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>697</b>	<b>385.26</b>	<b>1.51</b>
1.00	0.00	93	384.62	0.05
1.50	0.00	45	384.56	0.01
2.00	0.00	29	384.54	0.01
2.50	0.00	21	384.53	0.00
3.00	0.00	17	384.52	0.00
3.50	0.00	13	384.52	0.00
4.00	0.00	11	384.51	0.00
4.50	0.00	9	384.51	0.00
5.00	0.00	7	384.51	0.00
5.50	0.00	6	384.51	0.00
6.00	0.00	4	384.51	0.00
6.50	0.00	4	384.50	0.00
7.00	0.00	3	384.50	0.00
7.50	0.00	2	384.50	0.00
8.00	0.00	2	384.50	0.00
8.50	0.00	1	384.50	0.00
9.00	0.00	1	384.50	0.00
9.50	0.00	1	384.50	0.00
10.00	0.00	1	384.50	0.00
10.50	0.00	1	384.50	0.00
11.00	0.00	0	384.50	0.00
11.50	0.00	0	384.50	0.00
12.00	0.00	0	384.50	0.00



# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 87

## Stage-Discharge for Pond 3P: DETENTION POND

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
384.50	0.00	385.52	2.15	386.54	3.70
384.52	0.00	385.54	2.19	386.56	3.73
384.54	0.01	385.56	2.23	386.58	3.75
384.56	0.01	385.58	2.27	386.60	3.78
384.58	0.02	385.60	2.31	386.62	3.80
384.60	0.03	385.62	2.35	386.64	3.82
384.62	0.05	385.64	2.39	386.66	3.85
384.64	0.07	385.66	2.43	386.68	3.87
384.66	0.09	385.68	2.46	386.70	3.89
384.68	0.11	385.70	2.50	386.72	3.92
384.70	0.13	385.72	2.53	386.74	3.94
384.72	0.16	385.74	2.57	386.76	3.96
384.74	0.19	385.76	2.60	386.78	3.98
384.76	0.22	385.78	2.64	386.80	4.01
384.78	0.26	385.80	2.67	386.82	4.03
384.80	0.29	385.82	2.70	386.84	4.05
384.82	0.33	385.84	2.74	386.86	4.07
384.84	0.37	385.86	2.77	386.88	4.09
384.86	0.41	385.88	2.80	386.90	4.12
384.88	0.45	385.90	2.83	386.92	4.14
384.90	0.50	385.92	2.86	386.94	4.16
384.92	0.55	385.94	2.89	386.96	4.18
384.94	0.59	385.96	2.93	386.98	4.20
384.96	0.64	385.98	2.96	387.00	<b>4.22</b>
384.98	0.69	386.00	2.99		
385.00	0.75	386.02	3.02		
385.02	0.80	386.04	3.04		
385.04	0.85	386.06	3.07		
385.06	0.91	386.08	3.10		
385.08	0.97	386.10	3.13		
385.10	1.02	386.12	3.16		
385.12	1.08	386.14	3.19		
385.14	1.14	386.16	3.22		
385.16	1.20	386.18	3.24		
385.18	1.26	386.20	3.27		
385.20	1.32	386.22	3.30		
385.22	1.38	386.24	3.32		
385.24	1.44	386.26	3.35		
385.26	1.50	386.28	3.38		
385.28	1.56	386.30	3.40		
385.30	1.62	386.32	3.43		
385.32	1.68	386.34	3.46		
385.34	1.74	386.36	3.48		
385.36	1.79	386.38	3.51		
385.38	1.85	386.40	3.53		
385.40	1.90	386.42	3.56		
385.42	1.95	386.44	3.58		
385.44	2.00	386.46	3.61		
385.46	2.04	386.48	3.63		
385.48	2.08	386.50	3.66		
385.50	2.11	386.52	3.68		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 50-yr Duration=16 min, Inten=5.84 in/hr

Printed 5/11/2022

Page 88

## Stage-Area-Storage for Pond 3P: DETENTION POND

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
384.50	724	0
384.55	750	37
384.60	776	75
384.65	803	114
384.70	829	155
384.75	855	197
384.80	881	241
384.85	907	285
384.90	934	332
384.95	960	379
385.00	986	428
385.05	1,000	477
385.10	1,015	528
385.15	1,029	579
385.20	1,043	630
385.25	1,058	683
385.30	1,072	736
385.35	1,086	790
385.40	1,101	845
385.45	1,115	900
385.50	1,130	956
385.55	1,144	1,013
385.60	1,158	1,071
385.65	1,173	1,129
385.70	1,187	1,188
385.75	1,201	1,248
385.80	1,216	1,308
385.85	1,230	1,369
385.90	1,244	1,431
385.95	1,259	1,494
386.00	1,273	1,557
386.05	1,289	1,621
386.10	1,304	1,686
386.15	1,320	1,751
386.20	1,335	1,818
386.25	1,351	1,885
386.30	1,367	1,953
386.35	1,382	2,022
386.40	1,398	2,091
386.45	1,413	2,161
386.50	1,429	2,233
386.55	1,445	2,304
386.60	1,460	2,377
386.65	1,476	2,450
386.70	1,491	2,525
386.75	1,507	2,600
386.80	1,523	2,675
386.85	1,538	2,752
386.90	1,554	2,829
386.95	1,569	2,907
387.00	<b>1,585</b>	<b>2,986</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 89

Time span=0.00-12.00 hrs, dt=0.01 hrs, 1201 points

Runoff by Rational method, Rise/Fall=1.0/1.0 xTc

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

**Subcatchment 1S: PRE-DEVELOPMENT** Runoff Area=46,055 sf 0.00% Impervious Runoff Depth=1.16"  
Flow Length=270' Slope=0.0250 '/' Tc=15.5 min C=0.69 Runoff=4.65 cfs 0.102 af

**Subcatchment 2S: POST-DEVELOPMENT** Runoff Area=46,055 sf 63.15% Impervious Runoff Depth=1.30"  
Flow Length=360' Slope=0.0150 '/' Tc=8.8 min C=0.77 Runoff=5.18 cfs 0.114 af

**Reach 4R: CURB CUT WIER** Avg. Flow Depth=0.28' Max Vel=6.18 fps Inflow=5.18 cfs 0.114 af  
n=0.013 L=4.0' S=0.0200 '/' Capacity=12.61 cfs Outflow=5.19 cfs 0.114 af

**Pond 3P: DETENTION POND** Peak Elev=386.41' Storage=2,110 cf Inflow=5.19 cfs 0.114 af  
12.0" Round Culvert n=0.011 L=10.0' S=0.0500 '/' Outflow=3.55 cfs 0.114 af

**Total Runoff Area = 2.115 ac Runoff Volume = 0.216 af Average Runoff Depth = 1.23"**  
**68.43% Pervious = 1.447 ac 31.57% Impervious = 0.668 ac**

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 90

## Summary for Subcatchment 1S: PRE-DEVELOPMENT

Runoff = 4.65 cfs @ 0.26 hrs, Volume= 0.102 af, Depth= 1.16"


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Area (sf)	C	Description
31,035	0.65	GRAVEL PARKING
15,020	0.77	SHRUB POOR CONDITION BRUSH
46,055	0.69	Weighted Average
46,055		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
15.5	270	0.0250	0.29		Sheet Flow, SHEET FLOW SURFACE Range n= 0.130 P2= 4.19"

## Subcatchment 1S: PRE-DEVELOPMENT

Hydrograph

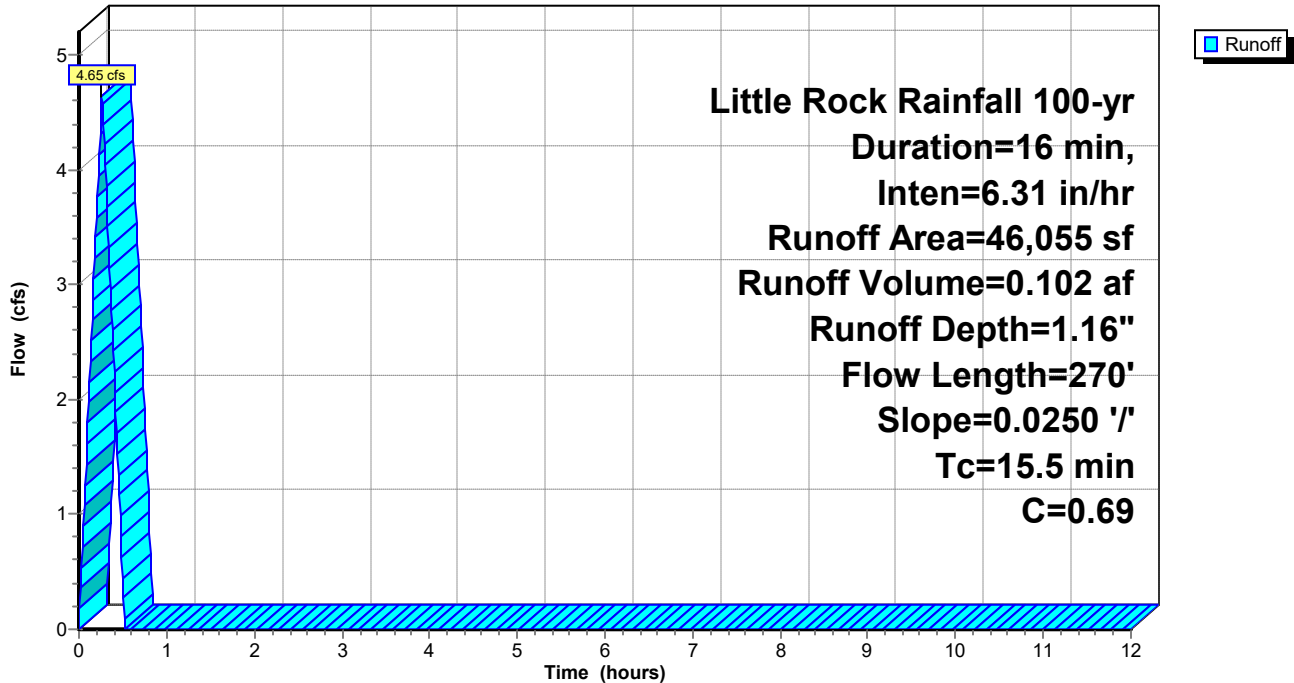

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 91

## Hydrograph for Subcatchment 1S: PRE-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	1.80	5.20	0.00	10.30	0.00
0.20	<b>3.59</b>	5.30	0.00	10.40	0.00
0.30	<b>4.04</b>	5.40	0.00	10.50	0.00
0.40	2.25	5.50	0.00	10.60	0.00
0.50	0.45	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering  
HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas  
Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022  
Page 92

## Summary for Subcatchment 2S: POST-DEVELOPMENT

Runoff = 5.18 cfs @ 0.15 hrs, Volume= 0.114 af, Depth= 1.30"  
Routed to Reach 4R : CURB CUT WIER


Runoff by Rational method, Rise/Fall=1.0/1.0 xTc, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Area (sf)	C	Description
22,479	0.95	ASPHALT SURFACE
6,603	0.97	ROOF TOP
16,973	0.46	GRASS LANDSCAPING
46,055	0.77	Weighted Average
16,973		36.85% Pervious Area
29,082		63.15% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	40	0.0150	0.10		<b>Sheet Flow, GRASS</b> Grass: Dense n= 0.240 P2= 4.19"
2.1	320	0.0150	2.49		<b>Shallow Concentrated Flow, PAVEMENT</b> Paved Kv= 20.3 fps
8.8	360	Total			

## Subcatchment 2S: POST-DEVELOPMENT

Hydrograph

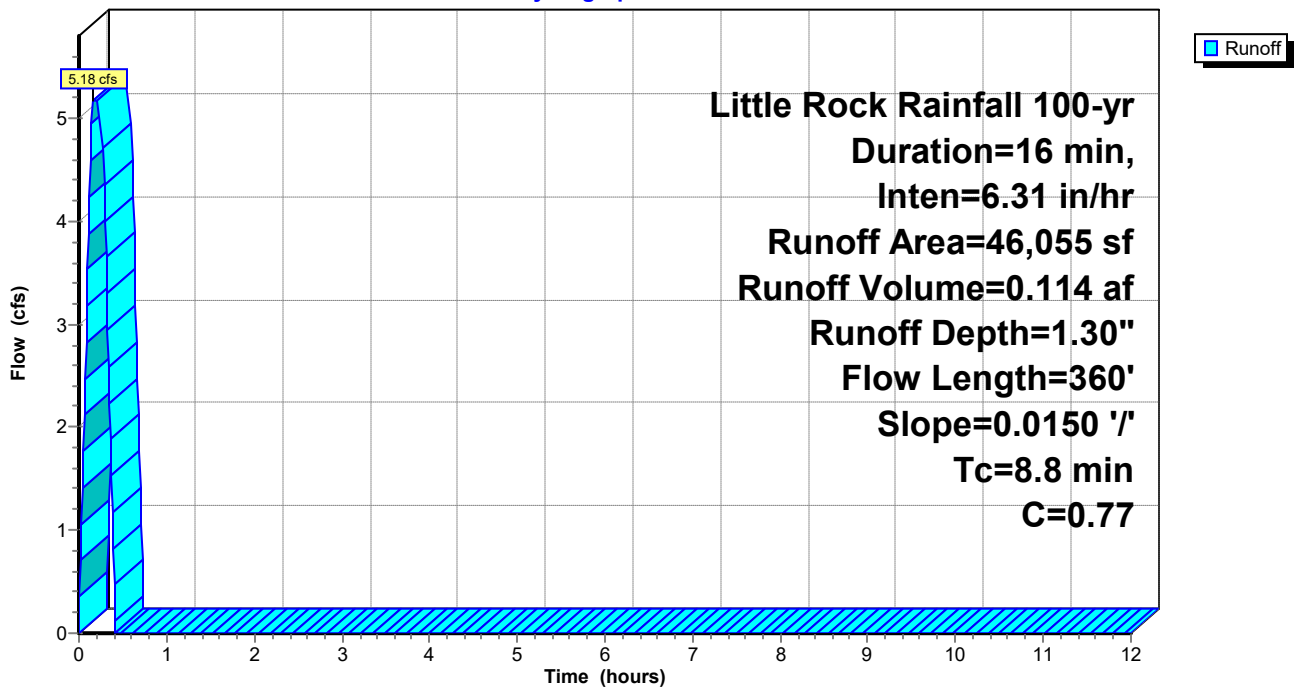

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 93

## Hydrograph for Subcatchment 2S: POST-DEVELOPMENT

Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)	Time (hours)	Runoff (cfs)
0.00	0.00	5.10	0.00	10.20	0.00
0.10	<b>3.53</b>	5.20	0.00	10.30	0.00
0.20	<b>5.18</b>	5.30	0.00	10.40	0.00
0.30	4.00	5.40	0.00	10.50	0.00
0.40	0.47	5.50	0.00	10.60	0.00
0.50	0.00	5.60	0.00	10.70	0.00
0.60	0.00	5.70	0.00	10.80	0.00
0.70	0.00	5.80	0.00	10.90	0.00
0.80	0.00	5.90	0.00	11.00	0.00
0.90	0.00	6.00	0.00	11.10	0.00
1.00	0.00	6.10	0.00	11.20	0.00
1.10	0.00	6.20	0.00	11.30	0.00
1.20	0.00	6.30	0.00	11.40	0.00
1.30	0.00	6.40	0.00	11.50	0.00
1.40	0.00	6.50	0.00	11.60	0.00
1.50	0.00	6.60	0.00	11.70	0.00
1.60	0.00	6.70	0.00	11.80	0.00
1.70	0.00	6.80	0.00	11.90	0.00
1.80	0.00	6.90	0.00	12.00	0.00
1.90	0.00	7.00	0.00		
2.00	0.00	7.10	0.00		
2.10	0.00	7.20	0.00		
2.20	0.00	7.30	0.00		
2.30	0.00	7.40	0.00		
2.40	0.00	7.50	0.00		
2.50	0.00	7.60	0.00		
2.60	0.00	7.70	0.00		
2.70	0.00	7.80	0.00		
2.80	0.00	7.90	0.00		
2.90	0.00	8.00	0.00		
3.00	0.00	8.10	0.00		
3.10	0.00	8.20	0.00		
3.20	0.00	8.30	0.00		
3.30	0.00	8.40	0.00		
3.40	0.00	8.50	0.00		
3.50	0.00	8.60	0.00		
3.60	0.00	8.70	0.00		
3.70	0.00	8.80	0.00		
3.80	0.00	8.90	0.00		
3.90	0.00	9.00	0.00		
4.00	0.00	9.10	0.00		
4.10	0.00	9.20	0.00		
4.20	0.00	9.30	0.00		
4.30	0.00	9.40	0.00		
4.40	0.00	9.50	0.00		
4.50	0.00	9.60	0.00		
4.60	0.00	9.70	0.00		
4.70	0.00	9.80	0.00		
4.80	0.00	9.90	0.00		
4.90	0.00	10.00	0.00		
5.00	0.00	10.10	0.00		

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 94

**Summary for Reach 4R: CURB CUT WIER**

[88] Warning: Qout>Qin may require smaller dt or Finer Routing

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 1.30" for 100-yr event  
Inflow = 5.18 cfs @ 0.15 hrs, Volume= 0.114 af  
Outflow = 5.19 cfs @ 0.16 hrs, Volume= 0.114 af, Atten= 0%, Lag= 0.6 min  
Routed to Pond 3P : DETENTION POND

Routing by Stor-Ind+Trans method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
Max. Velocity= 6.18 fps, Min. Travel Time= 0.0 min  
Avg. Velocity= 4.91 fps, Avg. Travel Time= 0.0 min

Peak Storage= 3 cf @ 0.16 hrs  
Average Depth at Peak Storage= 0.28' , Surface Width= 3.00'  
Bank-Full Depth= 0.50' Flow Area= 1.5 sf, Capacity= 12.61 cfs

3.00' x 0.50' deep channel, n= 0.013 Concrete, trowel finish  
Length= 4.0' Slope= 0.0200 '/'  
Inlet Invert= 387.25', Outlet Invert= 387.17'





# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas


Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 95


## Reach 4R: CURB CUT WIER

Hydrograph

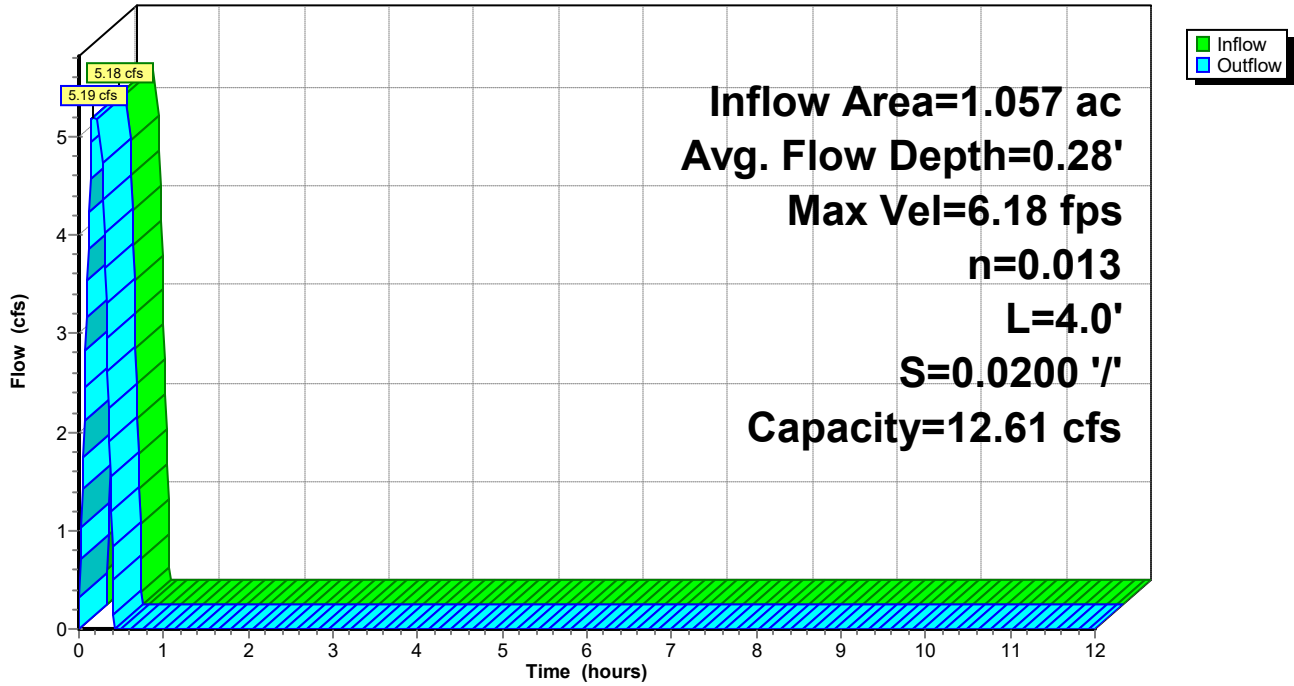

## Reach 4R: CURB CUT WIER

Stage-Discharge

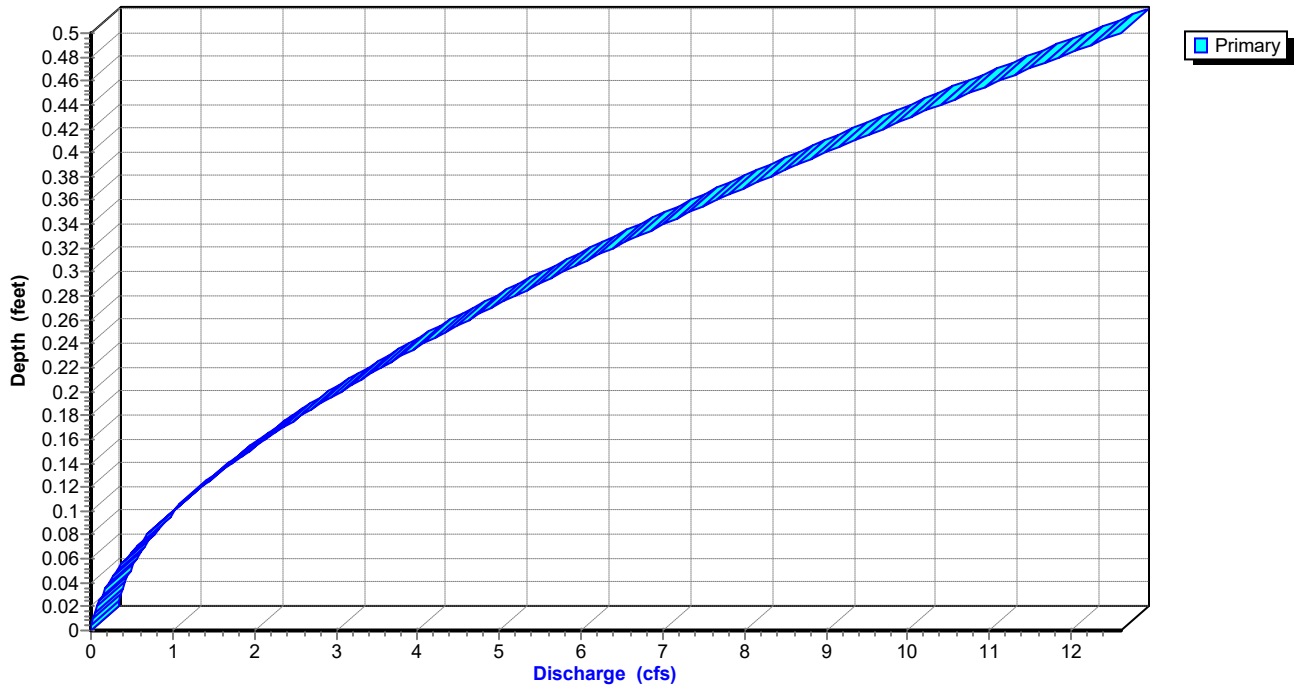

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas


Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 96

**Reach 4R: CURB CUT WIER**

Stage-Storage

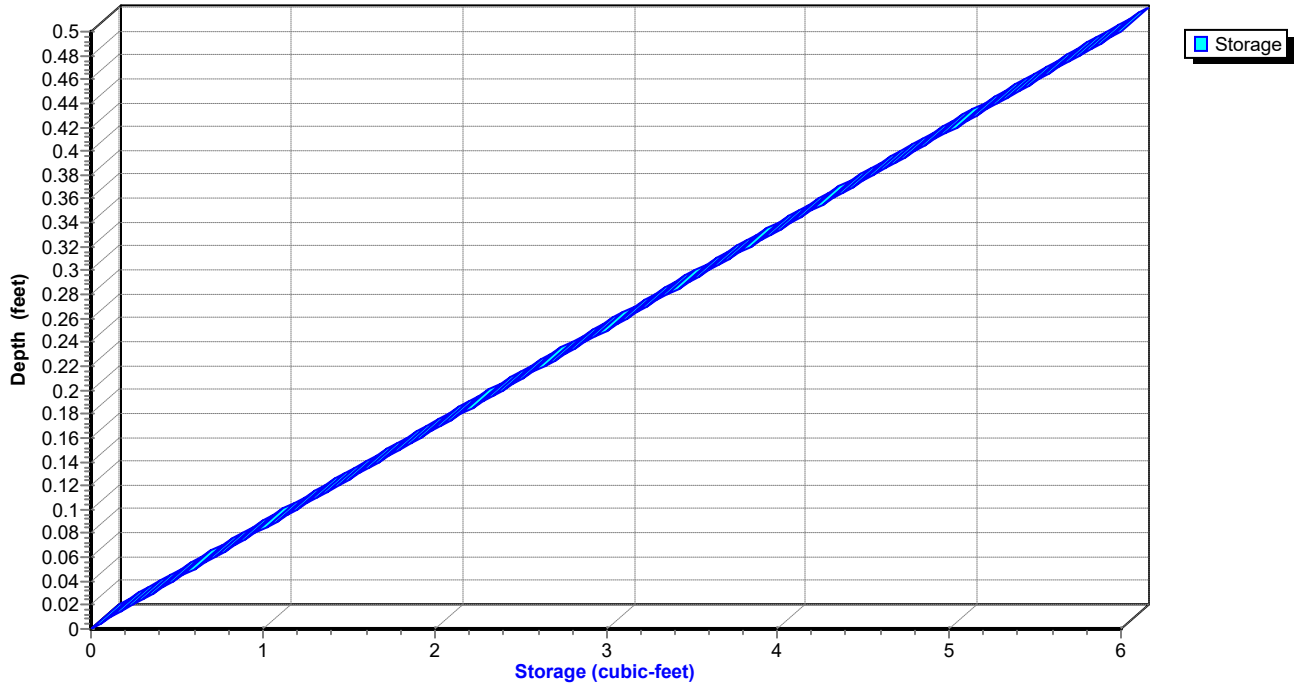

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 97

**Hydrograph for Reach 4R: CURB CUT WIER**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Outflow (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>0</b>	<b>387.25</b>	<b>0.00</b>
1.00	0.00	0	387.25	0.00
1.50	0.00	0	387.25	0.00
2.00	0.00	0	387.25	0.00
2.50	0.00	0	387.25	0.00
3.00	0.00	0	387.25	0.00
3.50	0.00	0	387.25	0.00
4.00	0.00	0	387.25	0.00
4.50	0.00	0	387.25	0.00
5.00	0.00	0	387.25	0.00
5.50	0.00	0	387.25	0.00
6.00	0.00	0	387.25	0.00
6.50	0.00	0	387.25	0.00
7.00	0.00	0	387.25	0.00
7.50	0.00	0	387.25	0.00
8.00	0.00	0	387.25	0.00
8.50	0.00	0	387.25	0.00
9.00	0.00	0	387.25	0.00
9.50	0.00	0	387.25	0.00
10.00	0.00	0	387.25	0.00
10.50	0.00	0	387.25	0.00
11.00	0.00	0	387.25	0.00
11.50	0.00	0	387.25	0.00
12.00	0.00	0	387.25	0.00

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 98

**Stage-Discharge for Reach 4R: CURB CUT WIER**

Elevation (feet)	Velocity (ft/sec)	Discharge (cfs)
387.25	0.00	0.00
387.26	0.75	0.02
387.27	1.18	0.07
387.28	1.54	0.14
387.29	1.86	0.22
387.30	2.15	0.32
387.31	2.41	0.43
387.32	2.66	0.56
387.33	2.90	0.70
387.34	3.12	0.84
387.35	3.34	1.00
387.36	3.54	1.17
387.37	3.74	1.35
387.38	3.92	1.53
387.39	4.11	1.72
387.40	4.28	1.93
387.41	4.45	2.14
387.42	4.62	2.36
387.43	4.78	2.58
387.44	4.93	2.81
387.45	5.09	3.05
387.46	5.23	3.30
387.47	5.38	3.55
387.48	5.52	3.81
387.49	5.65	4.07
387.50	5.79	4.34
387.51	5.92	4.62
387.52	6.05	4.90
387.53	6.17	5.19
387.54	6.30	5.48
387.55	6.42	5.77
387.56	6.53	6.08
387.57	6.65	6.38
387.58	6.76	6.69
387.59	6.87	7.01
387.60	6.98	7.33
387.61	7.09	7.65
387.62	7.19	7.98
387.63	7.30	8.32
387.64	7.40	8.65
387.65	7.50	9.00
387.66	7.59	9.34
387.67	7.69	9.69
387.68	7.79	10.04
387.69	7.88	10.40
387.70	7.97	10.76
387.71	8.06	11.12
387.72	8.15	11.49
387.73	8.24	11.86
387.74	8.32	12.23
387.75	<b>8.41</b>	<b>12.61</b>

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 99

**Stage-Area-Storage for Reach 4R: CURB CUT WIER**

Elevation (feet)	End-Area (sq-ft)	Storage (cubic-feet)
387.25	0.0	0
387.26	0.0	0
387.27	0.1	0
387.28	0.1	0
387.29	0.1	0
387.30	0.2	1
387.31	0.2	1
387.32	0.2	1
387.33	0.2	1
387.34	0.3	1
387.35	0.3	1
387.36	0.3	1
387.37	0.4	1
387.38	0.4	2
387.39	0.4	2
387.40	0.4	2
387.41	0.5	2
387.42	0.5	2
387.43	0.5	2
387.44	0.6	2
387.45	0.6	2
387.46	0.6	3
387.47	0.7	3
387.48	0.7	3
387.49	0.7	3
387.50	0.8	3
387.51	0.8	3
387.52	0.8	3
387.53	0.8	3
387.54	0.9	3
387.55	0.9	4
387.56	0.9	4
387.57	1.0	4
387.58	1.0	4
387.59	1.0	4
387.60	1.1	4
387.61	1.1	4
387.62	1.1	4
387.63	1.1	5
387.64	1.2	5
387.65	1.2	5
387.66	1.2	5
387.67	1.3	5
387.68	1.3	5
387.69	1.3	5
387.70	1.4	5
387.71	1.4	6
387.72	1.4	6
387.73	1.4	6
387.74	1.5	6
387.75	<b>1.5</b>	<b>6</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 100

## Summary for Pond 3P: DETENTION POND

Inflow Area = 1.057 ac, 63.15% Impervious, Inflow Depth = 1.30" for 100-yr event  
 Inflow = 5.19 cfs @ 0.16 hrs, Volume= 0.114 af  
 Outflow = 3.55 cfs @ 0.31 hrs, Volume= 0.114 af, Atten= 32%, Lag= 9.2 min  
 Primary = 3.55 cfs @ 0.31 hrs, Volume= 0.114 af

Routing by Stor-Ind method, Time Span= 0.00-12.00 hrs, dt= 0.01 hrs  
 Peak Elev= 386.41' @ 0.31 hrs Surf.Area= 1,402 sf Storage= 2,110 cf

Plug-Flow detention time= 10.4 min calculated for 0.114 af (100% of inflow)  
 Center-of-Mass det. time= 10.4 min ( 22.8 - 12.4 )

Volume	Invert	Avail.Storage	Storage Description
#1	384.50'	2,986 cf	<b>Custom Stage Data (Prismatic)</b> Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
384.50	724	0	0
385.00	986	428	428
386.00	1,273	1,130	1,557
387.00	1,585	1,429	2,986

Device	Routing	Invert	Outlet Devices
#1	Primary	384.50'	<b>12.0" Round 12" RCP</b> L= 10.0' CMP, projecting, no headwall, Ke= 0.900 Inlet / Outlet Invert= 384.50' / 384.00' S= 0.0500 '/' Cc= 0.900 n= 0.011 Concrete pipe, straight & clean, Flow Area= 0.79 sf

**Primary OutFlow** Max=3.55 cfs @ 0.31 hrs HW=386.41' (Free Discharge)  
 ↑1=12" RCP (Inlet Controls 3.55 cfs @ 4.52 fps)

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas


Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 101


## Pond 3P: DETENTION POND

Hydrograph

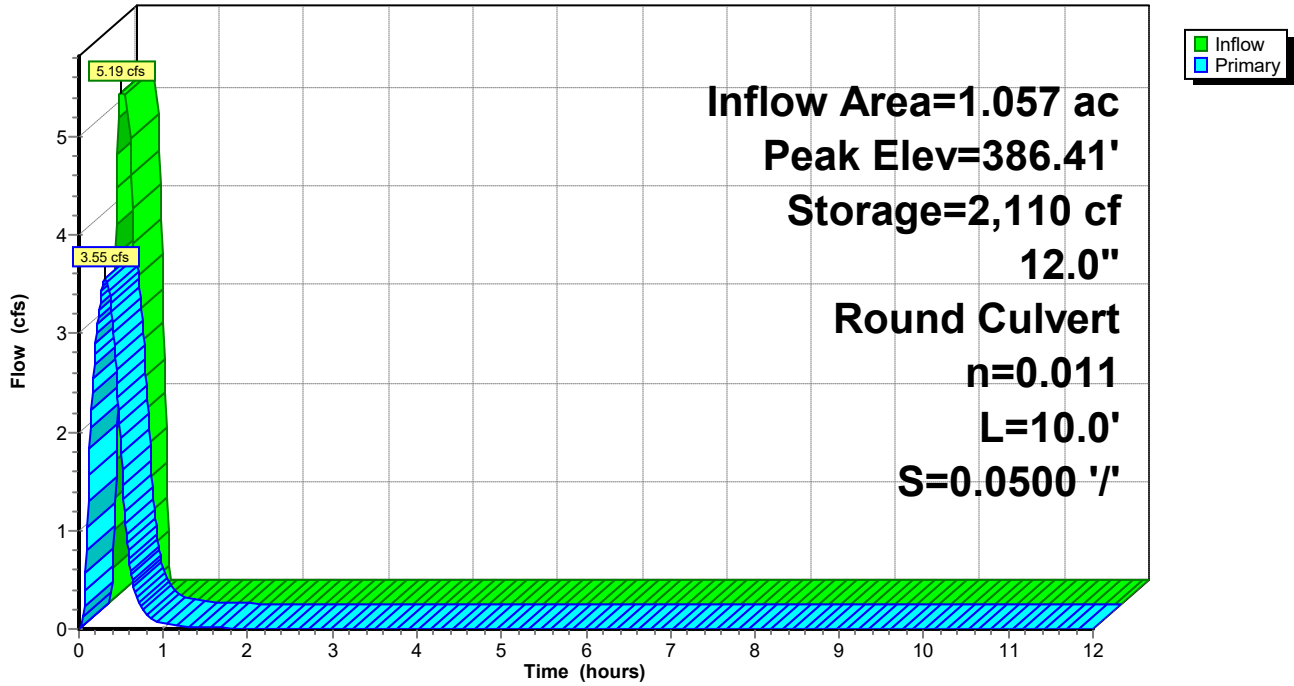

## Pond 3P: DETENTION POND

Stage-Discharge

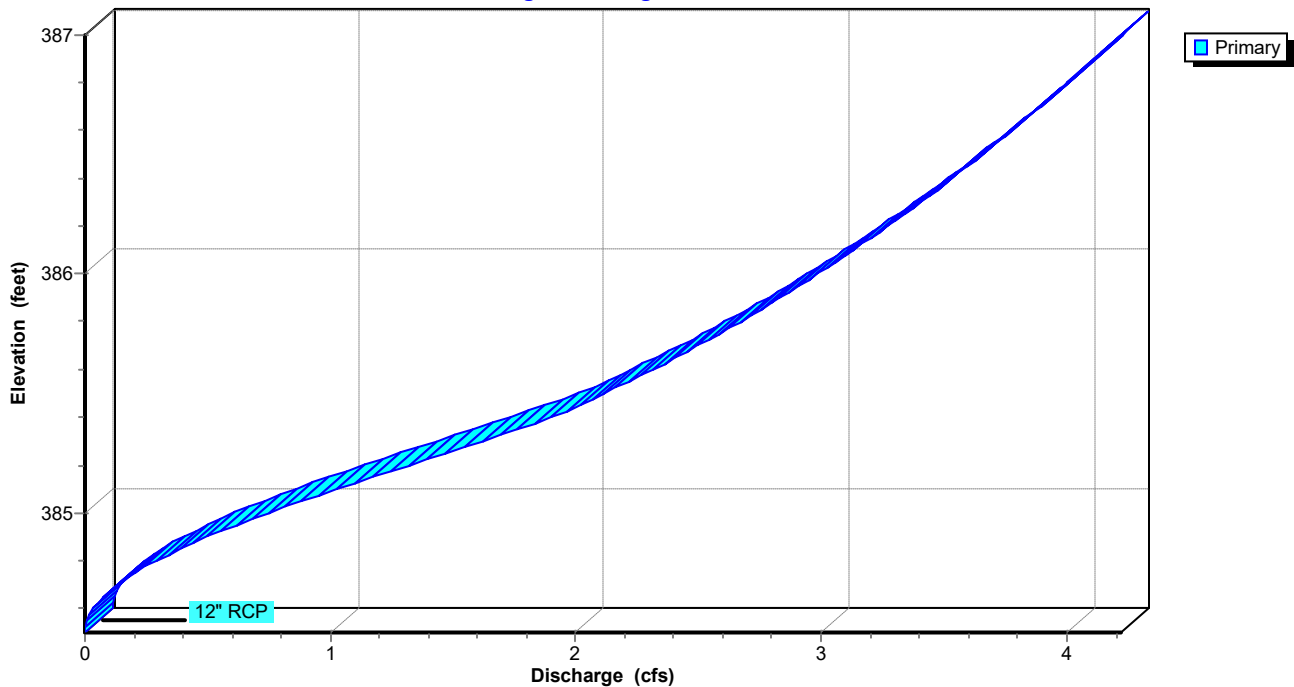

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC


Splash Car Wash Bryant, Arkansas

Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr

Printed 5/11/2022

Page 102

## Pond 3P: DETENTION POND

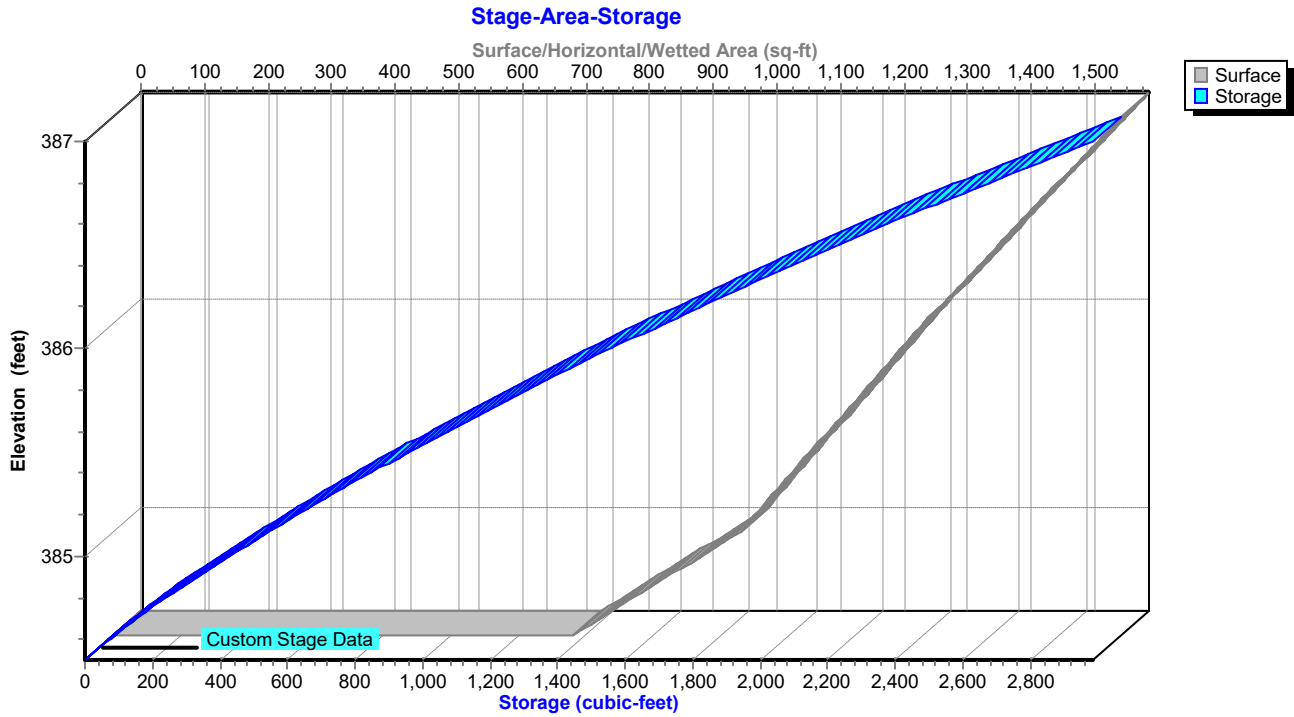



**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 103

**Hydrograph for Pond 3P: DETENTION POND**

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	<b>0.00</b>	<b>0</b>	<b>384.50</b>	<b>0.00</b>
0.50	<b>0.00</b>	<b>797</b>	<b>385.36</b>	<b>1.78</b>
1.00	0.00	97	384.63	0.06
1.50	0.00	46	384.56	0.01
2.00	0.00	29	384.54	0.01
2.50	0.00	21	384.53	0.00
3.00	0.00	17	384.52	0.00
3.50	0.00	13	384.52	0.00
4.00	0.00	11	384.51	0.00
4.50	0.00	9	384.51	0.00
5.00	0.00	7	384.51	0.00
5.50	0.00	6	384.51	0.00
6.00	0.00	5	384.51	0.00
6.50	0.00	4	384.50	0.00
7.00	0.00	3	384.50	0.00
7.50	0.00	2	384.50	0.00
8.00	0.00	2	384.50	0.00
8.50	0.00	2	384.50	0.00
9.00	0.00	1	384.50	0.00
9.50	0.00	1	384.50	0.00
10.00	0.00	1	384.50	0.00
10.50	0.00	1	384.50	0.00
11.00	0.00	1	384.50	0.00
11.50	0.00	0	384.50	0.00
12.00	0.00	0	384.50	0.00

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 104

**Stage-Discharge for Pond 3P: DETENTION POND**

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
384.50	0.00	385.52	2.15	386.54	3.70
384.52	0.00	385.54	2.19	386.56	3.73
384.54	0.01	385.56	2.23	386.58	3.75
384.56	0.01	385.58	2.27	386.60	3.78
384.58	0.02	385.60	2.31	386.62	3.80
384.60	0.03	385.62	2.35	386.64	3.82
384.62	0.05	385.64	2.39	386.66	3.85
384.64	0.07	385.66	2.43	386.68	3.87
384.66	0.09	385.68	2.46	386.70	3.89
384.68	0.11	385.70	2.50	386.72	3.92
384.70	0.13	385.72	2.53	386.74	3.94
384.72	0.16	385.74	2.57	386.76	3.96
384.74	0.19	385.76	2.60	386.78	3.98
384.76	0.22	385.78	2.64	386.80	4.01
384.78	0.26	385.80	2.67	386.82	4.03
384.80	0.29	385.82	2.70	386.84	4.05
384.82	0.33	385.84	2.74	386.86	4.07
384.84	0.37	385.86	2.77	386.88	4.09
384.86	0.41	385.88	2.80	386.90	4.12
384.88	0.45	385.90	2.83	386.92	4.14
384.90	0.50	385.92	2.86	386.94	4.16
384.92	0.55	385.94	2.89	386.96	4.18
384.94	0.59	385.96	2.93	386.98	4.20
384.96	0.64	385.98	2.96	387.00	<b>4.22</b>
384.98	0.69	386.00	2.99		
385.00	0.75	386.02	3.02		
385.02	0.80	386.04	3.04		
385.04	0.85	386.06	3.07		
385.06	0.91	386.08	3.10		
385.08	0.97	386.10	3.13		
385.10	1.02	386.12	3.16		
385.12	1.08	386.14	3.19		
385.14	1.14	386.16	3.22		
385.16	1.20	386.18	3.24		
385.18	1.26	386.20	3.27		
385.20	1.32	386.22	3.30		
385.22	1.38	386.24	3.32		
385.24	1.44	386.26	3.35		
385.26	1.50	386.28	3.38		
385.28	1.56	386.30	3.40		
385.30	1.62	386.32	3.43		
385.32	1.68	386.34	3.46		
385.34	1.74	386.36	3.48		
385.36	1.79	386.38	3.51		
385.38	1.85	386.40	3.53		
385.40	1.90	386.42	3.56		
385.42	1.95	386.44	3.58		
385.44	2.00	386.46	3.61		
385.46	2.04	386.48	3.63		
385.48	2.08	386.50	3.66		
385.50	2.11	386.52	3.68		

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

Splash Car Wash Bryant, Arkansas

*Little Rock Rainfall 100-yr Duration=16 min, Inten=6.31 in/hr*

Printed 5/11/2022

Page 105

**Stage-Area-Storage for Pond 3P: DETENTION POND**

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
384.50	724	0
384.55	750	37
384.60	776	75
384.65	803	114
384.70	829	155
384.75	855	197
384.80	881	241
384.85	907	285
384.90	934	332
384.95	960	379
385.00	986	428
385.05	1,000	477
385.10	1,015	528
385.15	1,029	579
385.20	1,043	630
385.25	1,058	683
385.30	1,072	736
385.35	1,086	790
385.40	1,101	845
385.45	1,115	900
385.50	1,130	956
385.55	1,144	1,013
385.60	1,158	1,071
385.65	1,173	1,129
385.70	1,187	1,188
385.75	1,201	1,248
385.80	1,216	1,308
385.85	1,230	1,369
385.90	1,244	1,431
385.95	1,259	1,494
386.00	1,273	1,557
386.05	1,289	1,621
386.10	1,304	1,686
386.15	1,320	1,751
386.20	1,335	1,818
386.25	1,351	1,885
386.30	1,367	1,953
386.35	1,382	2,022
386.40	1,398	2,091
386.45	1,413	2,161
386.50	1,429	2,233
386.55	1,445	2,304
386.60	1,460	2,377
386.65	1,476	2,450
386.70	1,491	2,525
386.75	1,507	2,600
386.80	1,523	2,675
386.85	1,538	2,752
386.90	1,554	2,829
386.95	1,569	2,907
387.00	<b>1,585</b>	<b>2,986</b>

# Splash Carwash Bryant

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

---

Splash Car Wash Bryant, Arkansas

*Table of Contents*

Printed 5/11/2022

## TABLE OF CONTENTS

### **Project Reports**

- 1 Routing Diagram
- 2 Area Listing (all nodes)
- 3 Pipe Listing (all nodes)

### **2-yr Event**

- 4 Node Listing
- 5 Subcat 1S: PRE-DEVELOPMENT
- 7 Subcat 2S: POST-DEVELOPMENT
- 9 Reach 4R: CURB CUT WIER
- 15 Pond 3P: DETENTION POND

### **5-yr Event**

- 21 Node Listing
- 22 Subcat 1S: PRE-DEVELOPMENT
- 24 Subcat 2S: POST-DEVELOPMENT
- 26 Reach 4R: CURB CUT WIER
- 32 Pond 3P: DETENTION POND

### **10-yr Event**

- 38 Node Listing
- 39 Subcat 1S: PRE-DEVELOPMENT
- 41 Subcat 2S: POST-DEVELOPMENT
- 43 Reach 4R: CURB CUT WIER
- 49 Pond 3P: DETENTION POND

### **25-yr Event**

- 55 Node Listing
- 56 Subcat 1S: PRE-DEVELOPMENT
- 58 Subcat 2S: POST-DEVELOPMENT
- 60 Reach 4R: CURB CUT WIER
- 66 Pond 3P: DETENTION POND

### **50-yr Event**

- 72 Node Listing
- 73 Subcat 1S: PRE-DEVELOPMENT
- 75 Subcat 2S: POST-DEVELOPMENT
- 77 Reach 4R: CURB CUT WIER
- 83 Pond 3P: DETENTION POND

### **100-yr Event**

- 89 Node Listing
- 90 Subcat 1S: PRE-DEVELOPMENT
- 92 Subcat 2S: POST-DEVELOPMENT
- 94 Reach 4R: CURB CUT WIER

**Splash Carwash Bryant**

Prepared by Phillip Lewis Engineering

HydroCAD® 10.10-7c s/n 12520 © 2022 HydroCAD Software Solutions LLC

---

Splash Car Wash Bryant, Arkansas

*Table of Contents*

Printed 5/11/2022

100 Pond 3P: DETENTION POND