
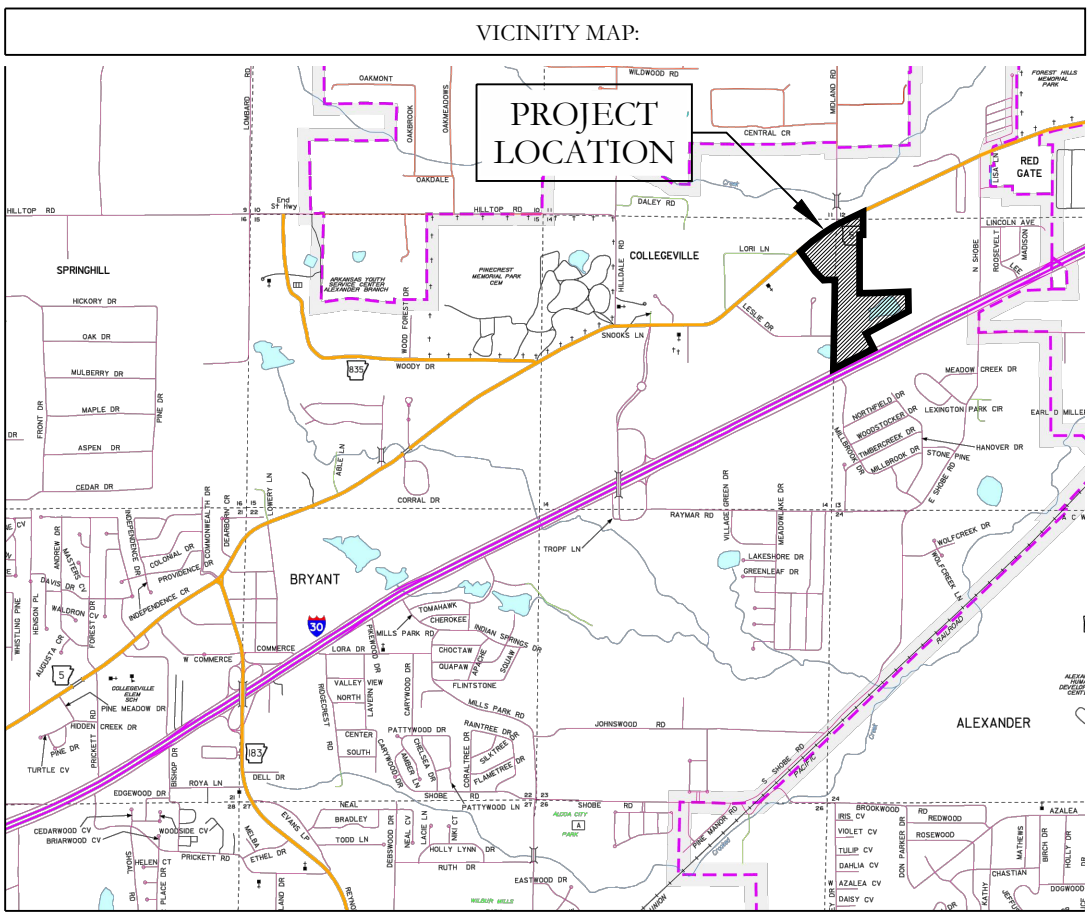


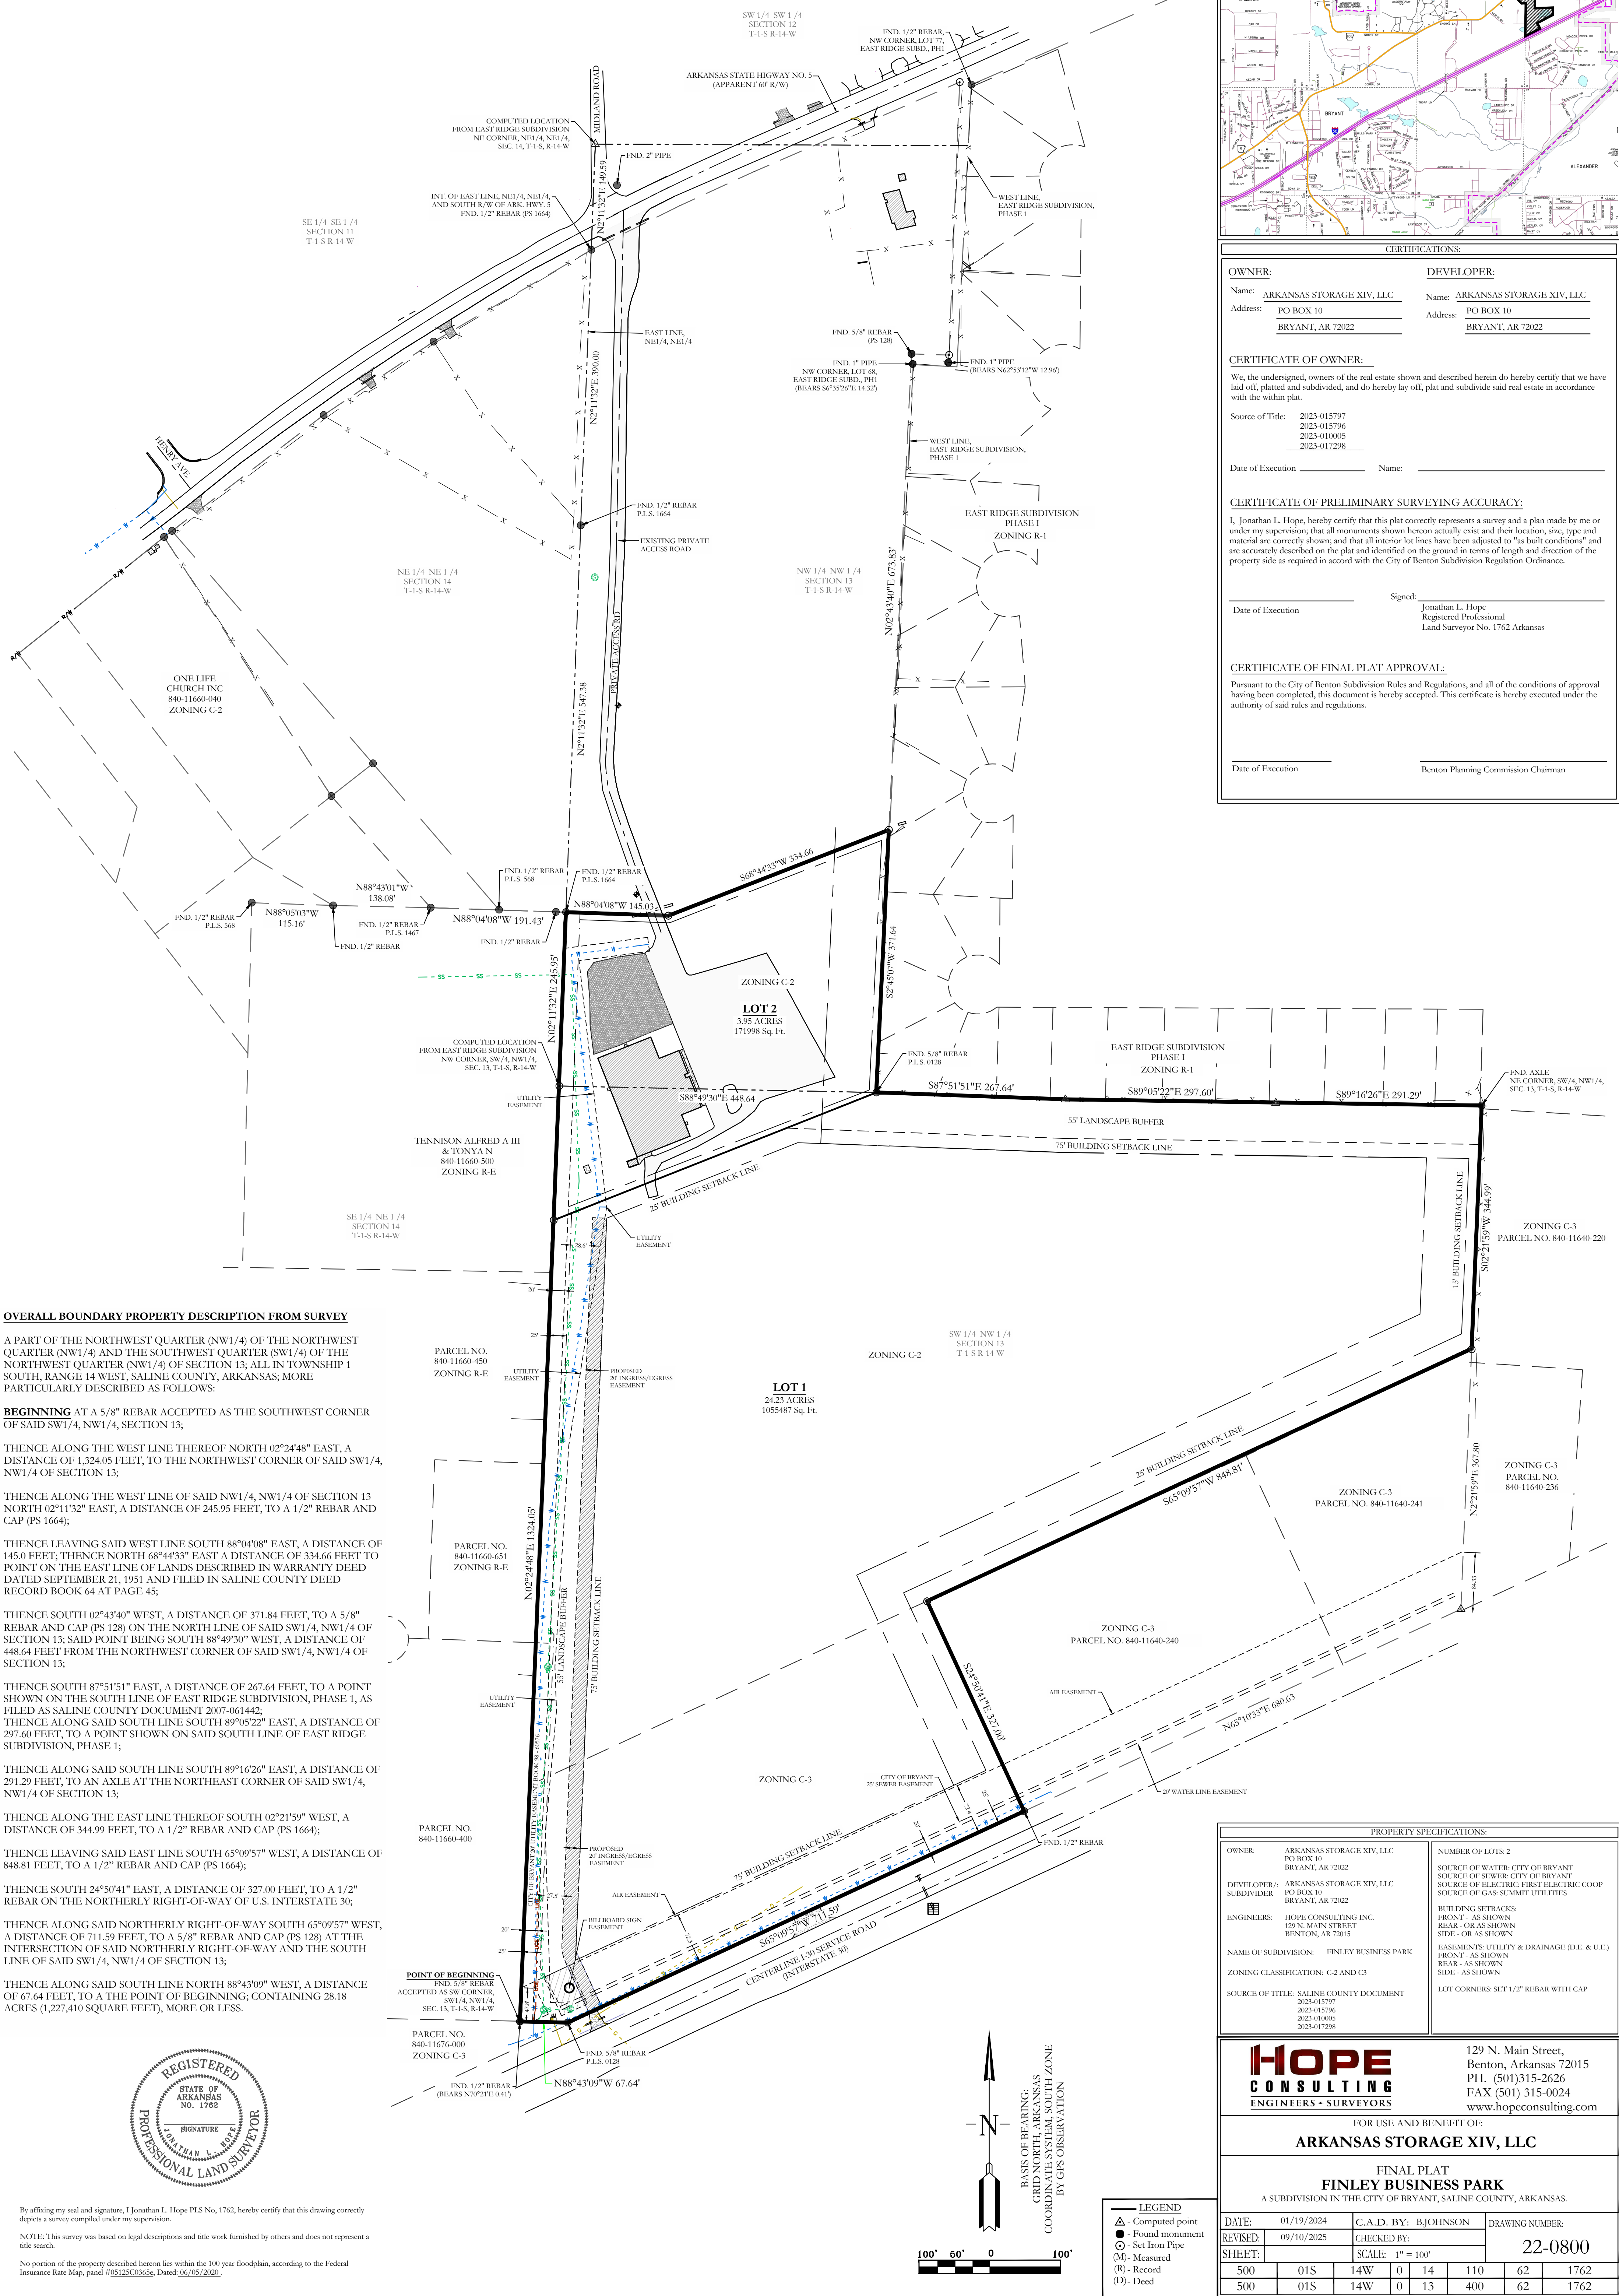

CERTIFICATIONS:	
OWNER:	DEVELOPER:
Name: ARKANSAS STORAGE XIV, LLC	Name: ARKANSAS STORAGE XIV, LLC
Address: PO BOX 10	Address: PO BOX 10
BRYANT, AR 72022	BRYANT, AR 72022
CERTIFICATE OF OWNER:	
We, the undersigned, owners of the real estate shown and described herein do hereby certify that we have had off, plotted and subdivided, and do hereby lay off, plat and subdivide said real estate in accordance with the within plat.	
Source of Title: 2023-015797 2023-015796 2023-010005 2023-017298	
Date of Execution	Name:
CERTIFICATE OF PRELIMINARY SURVEYING ACCURACY:	
I, Jonathan L. Hope, hereby certify that this plat correctly represents a survey and a plan made by me or under my supervision; that all monuments shown hereon actually exist and their location, size, type and material are correctly shown; and that all interior lot lines have been adjusted to "as built conditions" and are accurately described on the plat and identified on the ground in terms of length and direction of the property side as required in accord with the City of Benton Subdivision Regulation Ordinance.	
Date of Execution	Signed: Jonathan L. Hope Registered Professional Land Surveyor No. 1762 Arkansas
CERTIFICATE OF FINAL PLAT APPROVAL:	
Pursuant to the City of Benton Subdivision Rules and Regulations, and all of the conditions of approval having been completed, this document is hereby accepted. This certificate is hereby executed under the authority of said rules and regulations.	
Date of Execution	Benton Planning Commission Chairman

OVERALL BOUNDARY PROPERTY DESCRIPTION FROM SURVEY

A PART OF THE NORTHWEST QUARTER (NW1/4) OF THE NORTHWEST QUARTER (NW1/4) AND THE SOUTHWEST QUARTER (SW1/4) OF THE NORTHWEST QUARTER (NW1/4) OF SECTION 13; ALL IN TOWNSHIP 1 SOUTH, RANGE 14 WEST, SALINE COUNTY, ARKANSAS; MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT A 5/8" REBAR ACCEPTED AS THE SOUTHWEST CORNER OF SAID SW1/4, NW1/4, SECTION 13;

THENCE ALONG THE WEST LINE THEREOF NORTH 02°24'48" EAST, A DISTANCE OF 1,324.05 FEET, TO THE NORTHWEST CORNER OF SAID SW1/4, NW1/4 OF SECTION 13;

THENCE ALONG THE WEST LINE OF SAID NW1/4, NW1/4 OF SECTION 13 NORTH 02°11'32" EAST, A DISTANCE OF 245.95 FEET, TO A 1/2" REBAR AND CAP (PS 1664);

THENCE LEAVING SAID WEST LINE SOUTH 88°04'08" EAST, A DISTANCE OF 145.0 FEET; THENCE NORTH 68°44'33" EAST A DISTANCE OF 334.66 FEET TO POINT ON THE EAST LINE OF LANDS DESCRIBED IN WARRANTY DEED DATED SEPTEMBER 21, 1951 AND FILED IN SALINE COUNTY DEED RECORD BOOK 64 AT PAGE 45;

THENCE SOUTH 02°43'40" WEST, A DISTANCE OF 371.84 FEET, TO A 5/8" REBAR AND CAP (PS 128) ON THE NORTH LINE OF SAID SW1/4, NW1/4 OF SECTION 13; SAID POINT BEING SOUTH 88°49'30" WEST, A DISTANCE OF 448.64 FEET FROM THE NORTHWEST CORNER OF SAID SW1/4, NW1/4 OF SECTION 13;

THENCE SOUTH 87°51'51" EAST, A DISTANCE OF 267.64 FEET, TO A POINT SHOWN ON THE SOUTH LINE OF EAST RIDGE SUBDIVISION, PHASE 1, AS FILED AS SALINE COUNTY DOCUMENT 2007-061442; THENCE ALONG SAID SOUTH LINE SOUTH 89°05'22" EAST, A DISTANCE OF 297.60 FEET, TO A POINT SHOWN ON SAID SOUTH LINE OF EAST RIDGE SUBDIVISION, PHASE 1;

THENCE ALONG SAID SOUTH LINE SOUTH 89°16'26" EAST, A DISTANCE OF 291.29 FEET, TO AN AXLE AT THE NORTHEAST CORNER OF SAID SW1/4, NW1/4 OF SECTION 13;

THENCE ALONG THE EAST LINE THEREOF SOUTH 02°21'59" WEST, A DISTANCE OF 344.99 FEET, TO A 1/2" REBAR AND CAP (PS 1664);

THENCE LEAVING SAID EAST LINE SOUTH 65°09'57" WEST, A DISTANCE OF 848.81 FEET, TO A 1/2" REBAR AND CAP (PS 1664);

THENCE SOUTH 24°50'41" EAST, A DISTANCE OF 327.00 FEET, TO A 1/2" REBAR ON THE NORTHERLY RIGHT-OF-WAY OF U.S. INTERSTATE 30;

THENCE ALONG SAID NORTHERLY RIGHT-OF-WAY SOUTH 65°09'57" WEST, A DISTANCE OF 711.59 FEET, TO A 5/8" REBAR AND CAP (PS 128) AT THE INTERSECTION OF SAID NORTHERLY RIGHT-OF-WAY AND THE SOUTH LINE OF SAID SW1/4, NW1/4 OF SECTION 13;

THENCE ALONG SAID SOUTH LINE NORTH 88°43'09" WEST, A DISTANCE OF 67.64 FEET, TO A THE POINT OF BEGINNING; CONTAINING 28.18 ACRES (1,227,410 SQUARE FEET), MORE OR LESS.



By affixing my seal and signature, I, Jonathan L. Hope PLS No. 1762, hereby certify that this drawing correctly depicts a survey compiled under my supervision.

NOTE: This survey was based on legal descriptions and title work furnished by others and does not represent a title search.

No portion of the property described hereon lies within the 100 year floodplain, according to the Federal Insurance Rate Map, panel #05125C/365c, Dated: 06/05/2020.

- LEGEND**
- Computed point
 - Found monument
 - Set Iron Pipe
 - Measured
 - Record
 - Deed

PROPERTY SPECIFICATIONS:	
OWNER: ARKANSAS STORAGE XIV, LLC PO BOX 10 BRYANT, AR 72022	NUMBER OF LOTS: 2
DEVELOPER/SUBDIVIDER: ARKANSAS STORAGE XIV, LLC PO BOX 10 BRYANT, AR 72022	SOURCE OF WATER: CITY OF BRYANT SOURCE OF SEWER: CITY OF BRYANT SOURCE OF ELECTRIC: FIRST ELECTRIC COOP SOURCE OF GAS: SUMMIT UTILITIES
ENGINEERS: HOPE CONSULTING, INC. 129 N. MAIN STREET BENTON, AR 72015	BUILDING SETBACKS: FRONT - AS SHOWN REAR - OR AS SHOWN SIDE - OR AS SHOWN
NAME OF SUBDIVISION: FINLEY BUSINESS PARK ZONING CLASSIFICATION: C-2 AND C-3	EASEMENTS: UTILITY & DRAINAGE (D/E & U/E): FRONT - AS SHOWN REAR - AS SHOWN SIDE - AS SHOWN
SOURCE OF TITLE: SALINE COUNTY DOCUMENT 2023-015797 2023-015796 2023-010005 2023-017298	LOT CORNERS: SET 1/2" REBAR WITH CAP

HOPE CONSULTING ENGINEERS - SURVEYORS		129 N. Main Street, Benton, Arkansas 72015 PH. (501)315-2626 FAX (501) 315-0024 www.hopeconsulting.com	
FOR USE AND BENEFIT OF:			
ARKANSAS STORAGE XIV, LLC			
FINAL PLAT FINLEY BUSINESS PARK A SUBDIVISION IN THE CITY OF BRYANT, SALINE COUNTY, ARKANSAS.			
DATE: 01/19/2024	C.A.D. BY: RJOHNSON	DRAWING NUMBER:	
REVISED: 09/10/2025	CHECKED BY:	22-0800	
SHEET: 500	01S	14W	0 14 110 62 1762
500	01S	14W	0 13 400 62 1762